

KBP200 - KBP210

PRV : 50 - 1000 Volts

Io : 2.0 Amperes


FEATURES :

- * High case dielectric strength
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Rated isolation-voltage 2000 V_{AC}
- * Ideal for printed circuit board
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : Molded plastic
- * Epoxy : UL94V-0 rate flame retardant
- * Terminals : Plated lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Polarity symbols marked on case
- * Mounting position : Any
- * Weight : 3.4 grams

SILICON BRIDGE RECTIFIERS

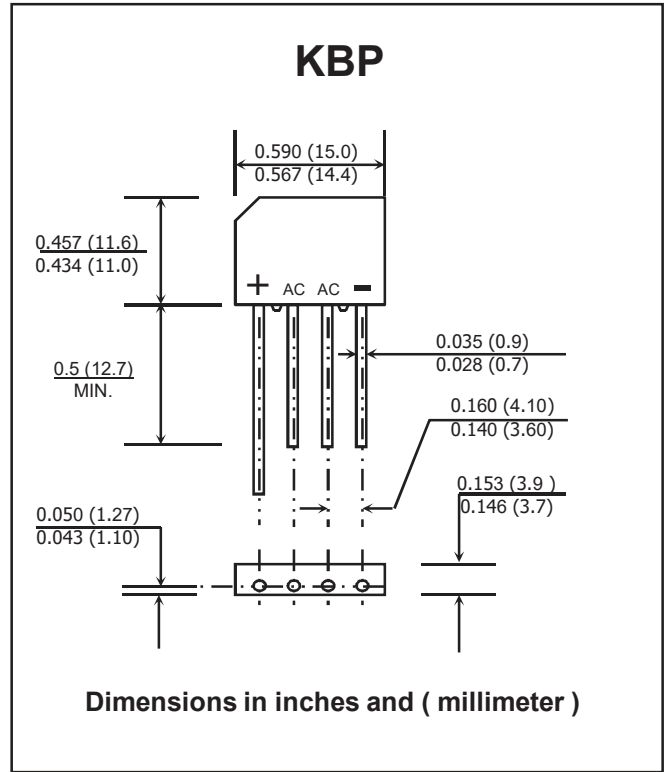

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| RATING | SYMBOL | KBP 200 | KBP 201 | KBP 202 | KBP 204 | KBP 206 | KBP 208 | KBP 210 | UNIT | |
|---|--------------------|---------------|---------|---------|---------|---------|---------|---------|------|------------------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V | |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | |
| Maximum Average Forward Current T _c = 50°C | I _{F(AV)} | 2.0 | | | | | | | | A |
| Peak Forward Surge Current, Single half sine wave Superimposed on rated load (JEDEC Method) | I _{FSM} | 60 | | | | | | | | A |
| Rating for fusing (t < 8.3 ms.) | I ² t | 10 | | | | | | | | A ² S |
| Maximum Forward Voltage per Diode at I _F = 1.0 A | V _F | 1.0 | | | | | | | | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage | Ta = 25 °C | 10 | | | | | | | | μA |
| | Ta = 100 °C | 1.0 | | | | | | | | mA |
| Typical Junction Capacitance per Diode (Note 1) | C _J | 24 | | | | | | | | pF |
| Typical Thermal Resistance (Note 2) | RθJA | 30 | | | | | | | | °C/W |
| Operating Junction Temperature Range | T _J | - 50 to + 125 | | | | | | | | °C |
| Storage Temperature Range | T _{STG} | - 50 to + 125 | | | | | | | | °C |

Notes :

- 1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
- 2) Thermal resistance from Junction to Ambient with units mounted on a 0.47" X 0.47" (12mm X 12mm) Cu. Pads.

RATING AND CHARACTERISTIC CURVES (KBP200 - KBP210)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

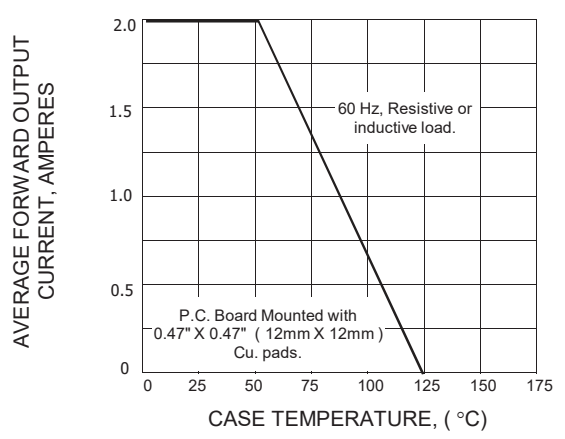


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

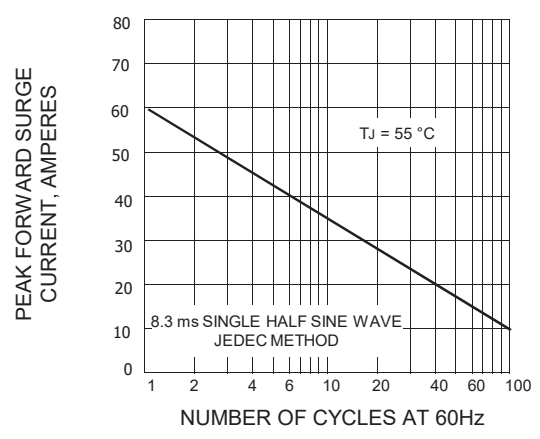


FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE

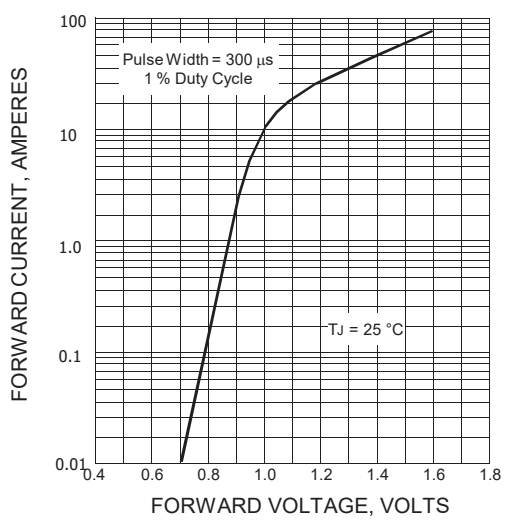


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

