


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

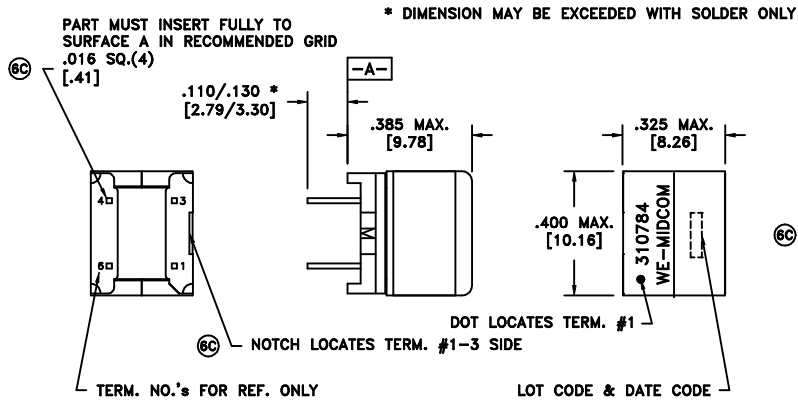


ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	6.25 ohms ±10%
D.C. RESISTANCE	4-6 @20°C	6.25 ohms ±10%
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	50mH min.
INDUCTANCE	4-6 10kHz, 100mVAC, Ls	50mH min.
LEAKAGE INDUCTANCE	tie(4+6), 100kHz, 100mVAC, Ls	175uH min.
DIELECTRIC	1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-3):(6-4)	1:1, ±1%

GENERAL SPECIFICATIONS:

RATED CURRENT: 170mArms current that will cause an approximate 40°C temperature rise from ambient.

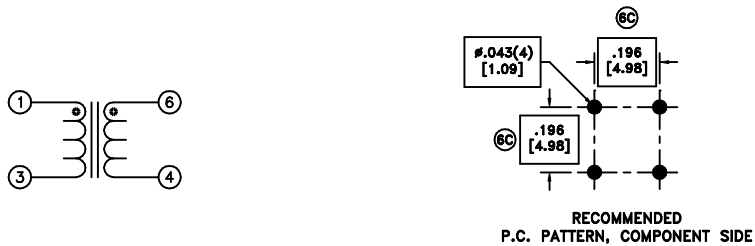

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT
6D	11/11	Method: Tray	
6C	6/09	PKG-0847	
6B	3/09	www.we-online.com/midcom	
6A	6/08	SEE REVISION SHEET FOR	

Tolerances unless otherwise specified:
Angles: ±1°
Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.001 [.03]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750310784



PART NO. 750310784
SPECIFICATION SHEET 1 OF 1