

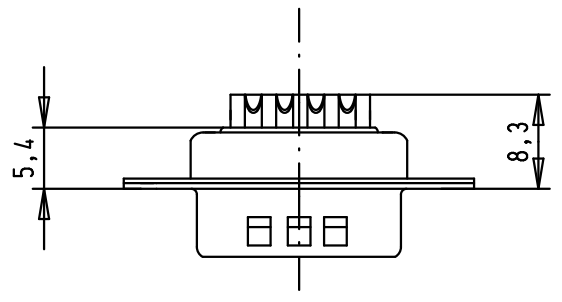
Solder bucket for AWG 20



SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	1000pf±20%
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB



				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4
			Detail.	8-JUL-02	CV	
			Insp.	12/01/12	JB	
			Stand.			
36283	12/01/12	SD				
32802	11/07/05	JMDR				
31058	8-JUL-02	CV				
Mod.	Dot.	Name				

HARTING EURL  
F-95972 Paris

D-Sub, male, straight,  
9 Poles, with turned  
solder bucket and fixing hole

TB 09641217230

Ma?Mstab/  
Scale  
1.5:1

Blatt/ Page  
1 / 1

Sub.

D  
C  
B  
A