

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION

REVISIONS

© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	ECR-17-017581	04DEC2017	GSK	KN

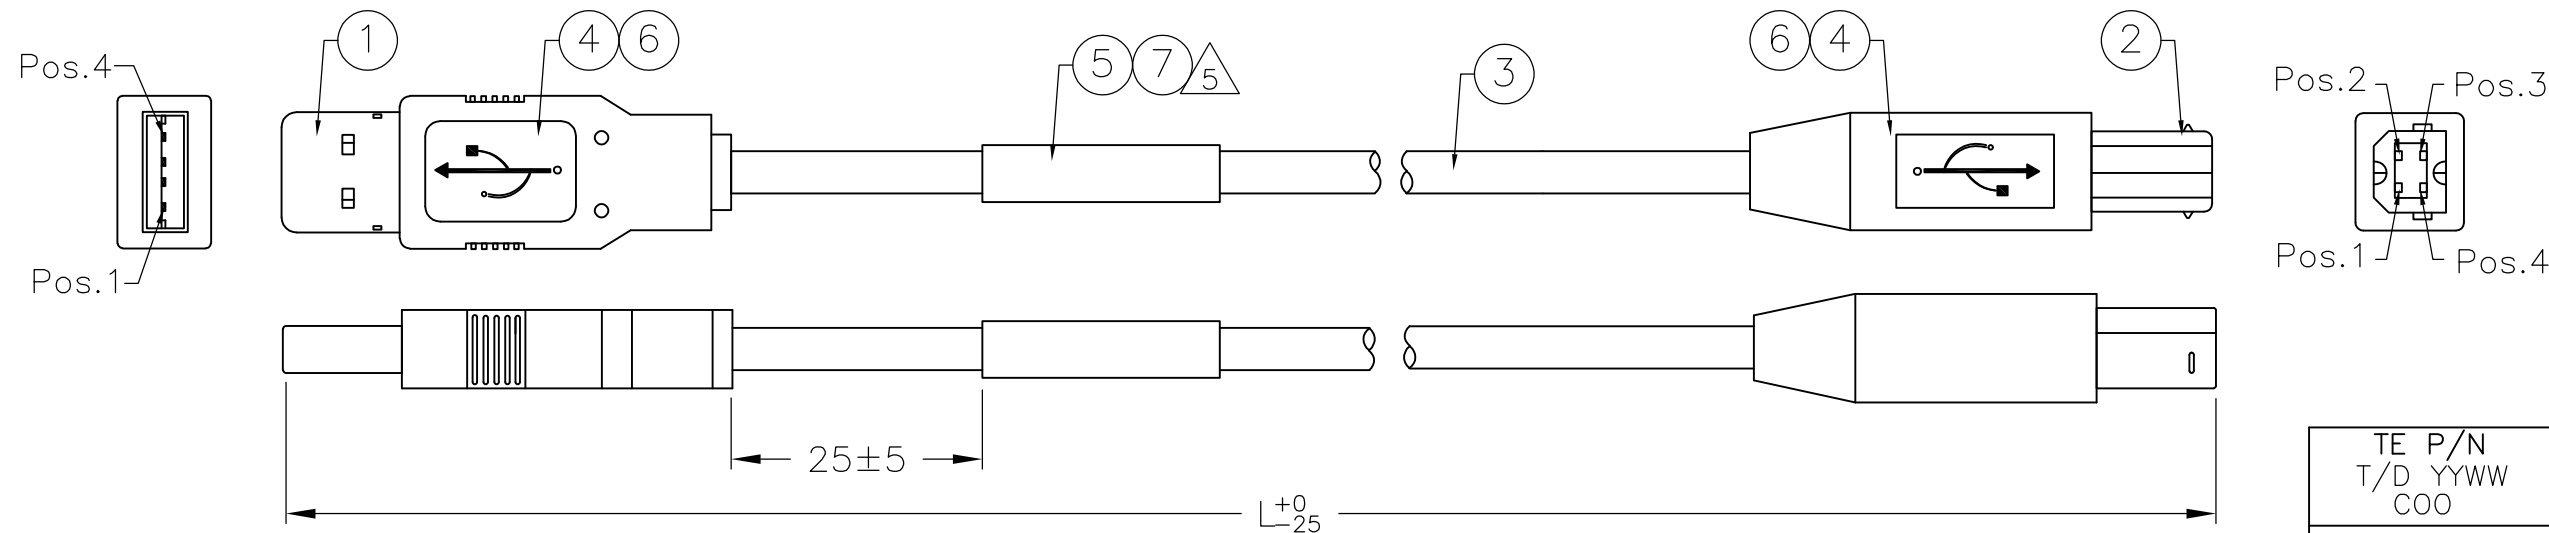

LABEL


NOTES:

1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 1000MM PER USB SPECIFICATIONS.
5. TO USE AT MEXICO FACTORY.

PART NO.	1487586-1	1487586-2	1487586-3	1487586-4
LENGTH(L)	500	250	162	310

QTY	1	1	1	1	PC	SBP LABEL, WHITE, 25.4 X 36.5mm	7
	AR	AR	AR	AR	MR	COPPER FOIL, W: 5MM	6
	1	1	1	1	PC	LABEL 25*35MM, WHITE: 25*13	5
	AR	AR	AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	4
	AR	AR	AR	AR	MR	USB 2.0 Cable 28AWG*1P+28AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	3
	1	1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
	1	1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
	-4	-3	-2	-1	U/M	DESCRIPTION	ITEM

PIN ASSIGNMENT :

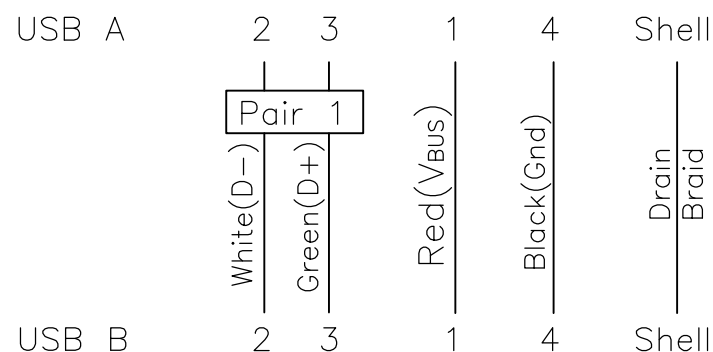

PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS ENVIRONMENTAL STANDARD TEC-138-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN BOVEY LIU 25FEB02	<b>STE</b> TE Connectivity
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK J.HUNT 25FEB02	
MATERIAL	FINISH	APVD J.HUNT 25FEB02	NAME
		PRODUCT SPEC	USB A TYPE TO USB B TYPE CABLE ASSEMBLY
		APPLICATION SPEC	
		WEIGHT	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		CUSTOMER DRAWING	A3 00779 C-1487586
		SCALE N.T.S.	SHEET 1 OF 1 REV H