

CTL1206DGR2T DATASHEET


Chip Type LED, 1206, Dome Lens, Green



VENKEL LTD.

Part Number	Size	Emitting Color	Emitting Material	Lens-Color	Luminous Intensity ($I_F=20\text{mA}$) mcd	Wavelength nm λ_P	Viewing Angle (2θ 1/2)
CTL1206DGR2T	1206	Green	AllnGaP	Water Clear	900.0 min 3600.0 typ	520	20°


Electrical & Optical Specifications ($T_A=25^\circ\text{C}$)	GR1 (AlGaInP)	Unit
Forward Voltage (Min.) ($I_F=20\text{mA}$)	V_F	3.3 V
Forward Voltage (Max.) ($I_F=20\text{mA}$)	V_F	3.9 V
Reverse Current (Max.) ($V_R=5\text{V}$)	I_R	<100 μA
Peak Wavelength (Typ.) ($I_F=20\text{mA}$)	λ_P	520 nm
Dominant Wavelength (Typ.) ($I_F=20\text{mA}$)	λ_D	525 nm
Spectral Line Half Width (Typ.) ($I_F=20\text{mA}$)	$\Delta\lambda$	30 nm

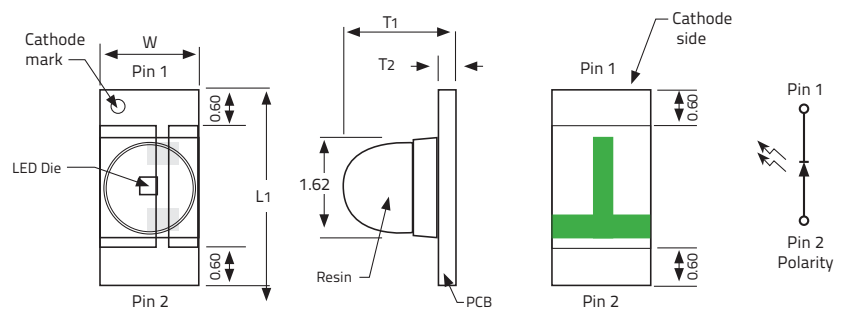

Dimensions				Units: Inches (mm)			
L_1	W	T_1	T_2	L_1	W	T_1	T_2
0.1259±0.004 (3.20±0.1)	0.0629±0.004 (1.6±0.1)	0.0728±0.004 (1.85±0.1)	0.0110±0.004 (0.28±0.1)				

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)	GR1 (AlGaInP)	Unit
Reverse Voltage	V_R	5 V
DC Forward Current	I_F	20 mA
Peak Forward Current 1/10 Duty Cycle @ 10KHz	I_{FP}	40 mA
Power Dissipation	P_D	48 mW
Operating Temperature	T_A	-40 ~ +85 °C
Storage Temperature	T_{stg}	-40 ~ +100 °C

Soldering Pad Layout

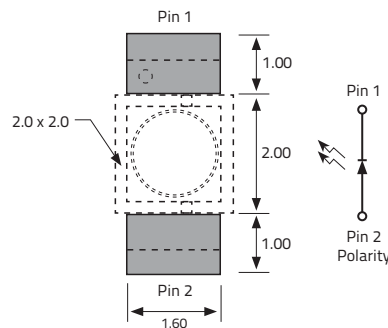

Tolerances are all ±0.1mm

Graphs

Fig.1 Forward Current vs Forward Voltage

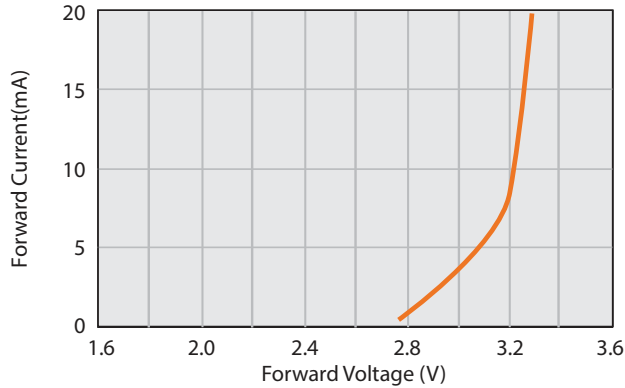


Fig.2 Relative Intensity vs Forward Current

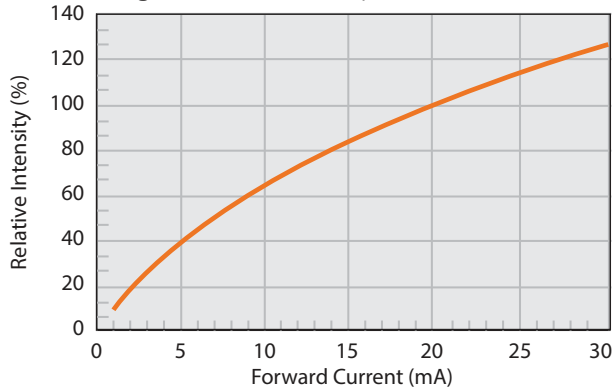


Fig.3 Current vs Temp

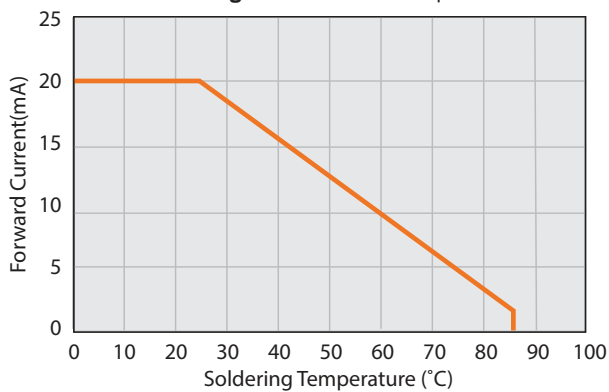


Fig.4 Relative Intensity vs Wavelength


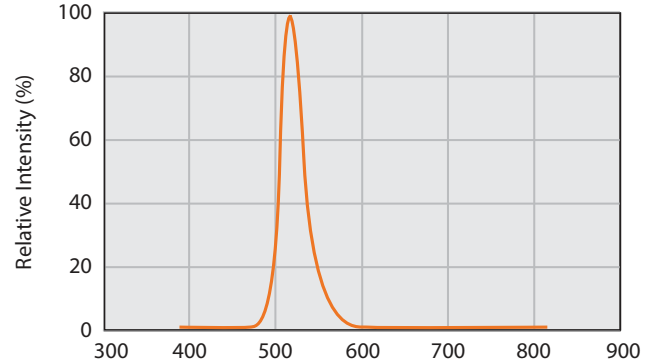


Fig.5 Direct Radiation

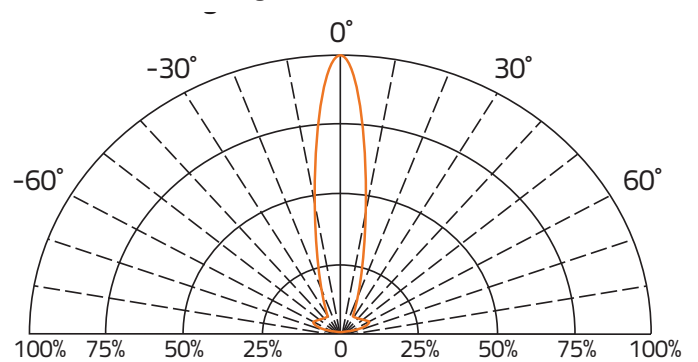

Environmental information	
RoHS Status	6 of 6 Compliant
REACH Status	Compliant
Halogen Status	Halogen Free
Conflict Mineral Status	Conflict Mineral Free
Moisture Sensitivity Level (MSL)	3

Reflow profile	
Max Reflow Temperature	260°C
Number of Reflow Cycles	2
Time at Max Reflow Temperature	10 seconds

CTL1206DGR2T DATASHEET

Chip Type LED, 1206, Dome Lens, Green



VENKEL LTD.

Label Example

Item: CTL1206DGR2T

Chip Type LED, 1206, Dome Lens, Red (Super Bright Red)

Qty: 2000

D/C: 1616

Lot: E1A1A22L12

BIN/HUE: AA/B

VF: 1.6V-2.4V

VENKEL LTD

YOUR SINGLE SOURCE FOR SURFACE MOUNT PASSIVES

Codes:

VF: Forward Voltage | BIN: Luminous Intensity | HUE: Dominant Wavelength

Luminous Intensity Classification (BIN Code)

BIN Code	Iv(mcd) at 20mA	
	Min.	Max.
Y	900.0	1000.0
Z	1125.0	1440.0
AA	1440.0	1800.0
AB	1800.0	2250.0
AC	2250.0	2850.0
AD	2850.0	3600.0

Dominant Wavelength Classification (HUE Code)

HUE Code	λ_D (nm) at 20mA	
	Min.	Max.
A	515.0	520.0
B	520.0	525.0
C	525.0	530.0
D	530.0	535.0

CTL1206DGR2T DATASHEET


Chip Type LED, 1206, Dome Lens, Green



VENKEL LTD.

Reel Specifications

Units: mm

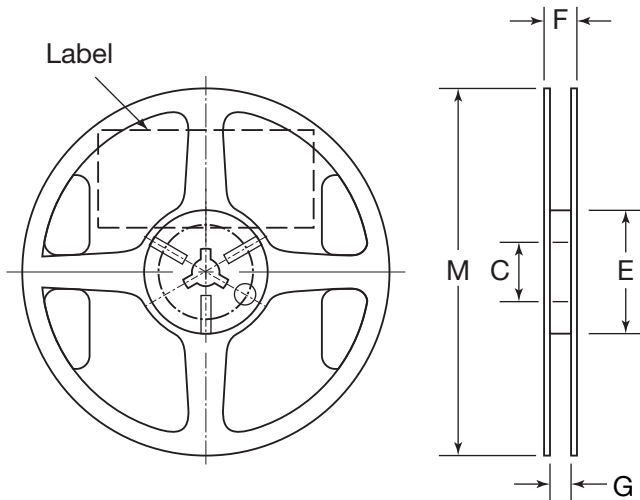

M	C	F	E	G
178±1.50	13.0±1.0	12.0±1.0	60.0±1.0	9.0±1.0

Packaging Specifications


Reel Size:	7"
Quantity per Reel :	2,000

Storage Specifications

1. Storage temperature and RH: 5°C~35°C, RH60%
2. Once the package is opened, the LEDs should be used within a week. Otherwise, they should be kept in a moisture proof bag with desiccant. We suggest that you use this product within one year from date code.
3. If opened for more than one week in an atmosphere of 5°C~35°C, RH60%. The parts should be heat treated at 60°C±5°C for 15 hours.

Tape Specifications

Units: mm

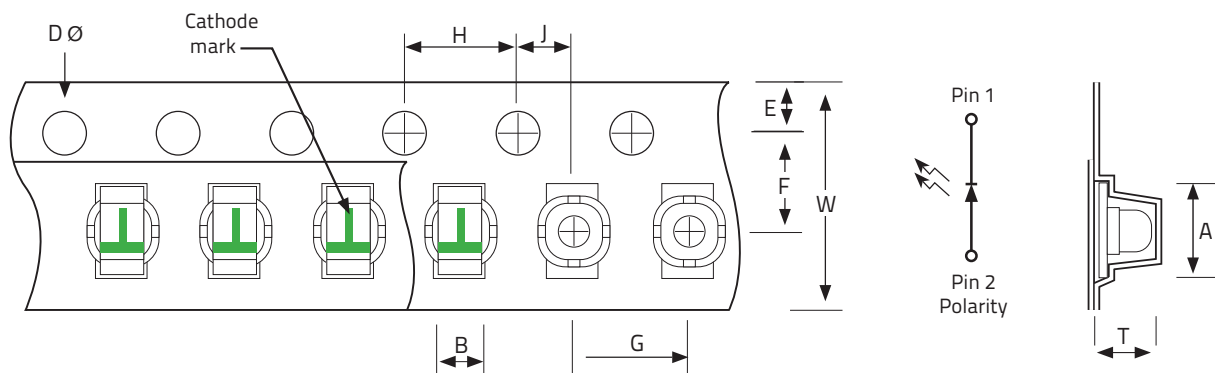

T	W	A	B	F
2.17±0.10	8.0+0.30/-0.10	3.37±0.10	1.78±0.10	3.5±0.05
E	H	J	D	G
1.75±0.1	4.0±0.1	2.0±0.05	1.5±0.1	4.0±0.1

CTL1206DGR2T DATASHEET

Chip Type LED, 1206, Dome Lens, Green



VENKEL LTD.

Environmental Test Criteria

Classification	Test Item	Test Condition	Sample Size
Endurance Test	Operating Life	1. 25°C 2. 1000hrs	40
	High Temperature Storage	1. 85°C±5°C 2. 1000hrs	40
	Temperature, Humidity Bias	1. 40°C 2. 93% 3. 1000hrs	40
Environmental Test	Solderability	1. 245°C / 3±1 sec 2. 260°C / 10±1 sec	40