

S CN BN - J 1 1 50 - SO IPM

SUNTSU

CONNECTOR

BNC

Connector Type
Jack







Rows

Connectors
per Row

Impedance
50

Contact Termination
Solder

Mounting Style
Isolated from
Panel

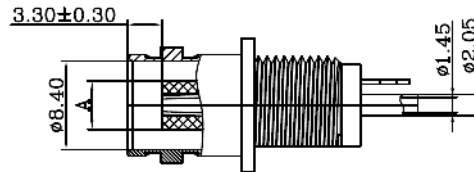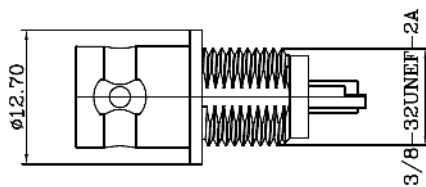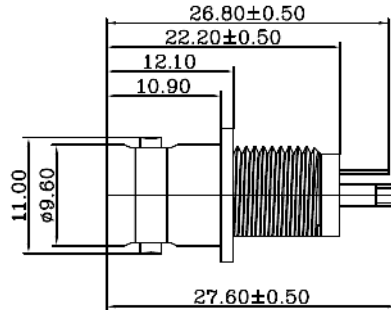

- Materials:
 - Body: Zinc Nickel Plated
 - Contact: Brass Nickel Plated
 - Insulator: ABS White
- Normal Impedance: 50Ω
- Frequency Range: 0-2 GHz
- Max Peak Voltage: 500V
- Dielectric Strength: 1500V RMS
- Insulation Resistance: 5000MΩ/Min



BNC FEMALE ISOLATED FROM PANEL
WITH MOLDED THERMO PLASTIC
INSULATION

Document History

Edits Made	Date	Edited By	Approved By	Part No.	REV.	Drawn	Page
Initial Release	06/28/2021	B. Gibbons	KH Mun	SCNBN-J1150-SOIPM	A	B. Gibbons 06/28/2021	1 / 1
				Drawing No.	SCALE	Checked	
				Tolerance	None	KH Mun 06/28/2021	
					UNIT	Approved	
					mm	KH Mun 06/28/2021	