
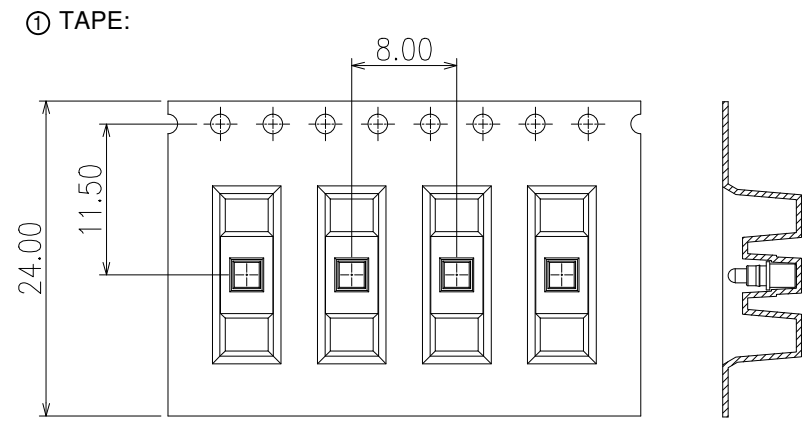


NOTES:
 Plunger: Brass, 20μ" MIN Au over, 50μ" MIN Ni over
 Barrel : Brass, 3μ" ,MIN Au over, 50μ" MIN Ni over
 Spring : Stainless Steel
Mechanical Characteristics:
 Spring Force : 60g ± 20% at Working Length
 Mechanical Life : 1,000,000 cycle
Electrical Characteristics:
 Current Rating : 2A
 Contact Resistance : 20 mΩ Max
 Operating Temperature range : -55~125° C
Packing:
 A-CSL-S-020-B4 : PE Bag
 ① A-CSL-S-020-BR4 :Tape&Reel

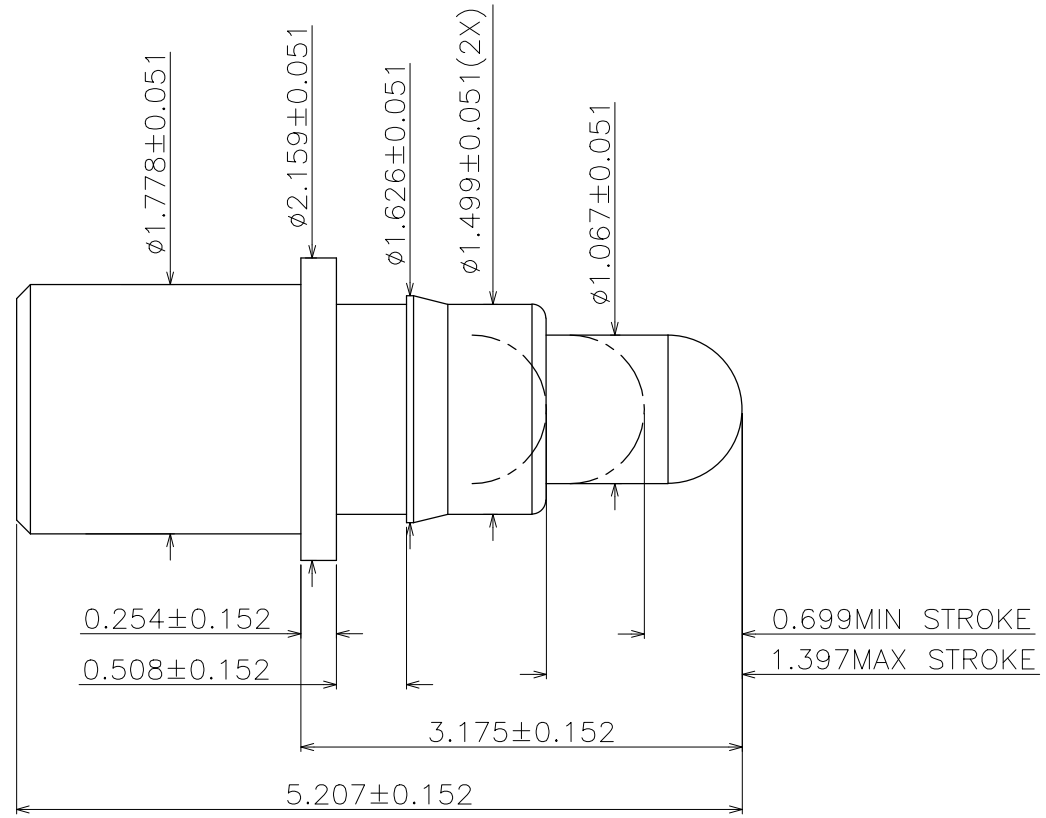

Component Load Per 13" Reel :1450 Pcs

RoHS compliant
 Unit: mm

Scale	Free						Date	Name	Customer-No.
TOLERANCE						Drawn	28.03.2018	Tom	ASSMANN WSW-No. A-CSL-S-020-Bx4
X.X	±0.20				Approved	09.12.2018	Luca		
X.XX	±0.10								
X.XXX	±0.08								
DIM	TOL	①	Add the tape & reel packing	09.12.2018	Luca	ASSMANN WSW components		Drawing-No.	ASS 7897 CO
Angle	±3°	②	Drawn	28.03.2018	Tom			rev01	
Angle	TOL	Id.	Modification	Date	Name			Replace	Sheet