



Electrical specifications

Center Frequency (Fo): 1750 MHz
Bandwidth (BW): 200 MHz
Insertion Loss (F0): 1.2 dB max
Ripple in BW: 0.5 dB max
VSWR: 1.5 : 1 dB max
Rejection: 40dB min at 1390MHz
Rejection 2: 40dB min at 2200MHz
Input / Output Impedance: 50 Ohms
Power Handling: 1 W

Mechanical


Mounting Method: SMT
Dimensions: 26.4 x 14 x 4.65 mm

Environmental

Operating Temperature: -20°C to +70°C
Storage Temperature: -55°C to +85°C

This product is RoHs compliant.

Outline Drawing:

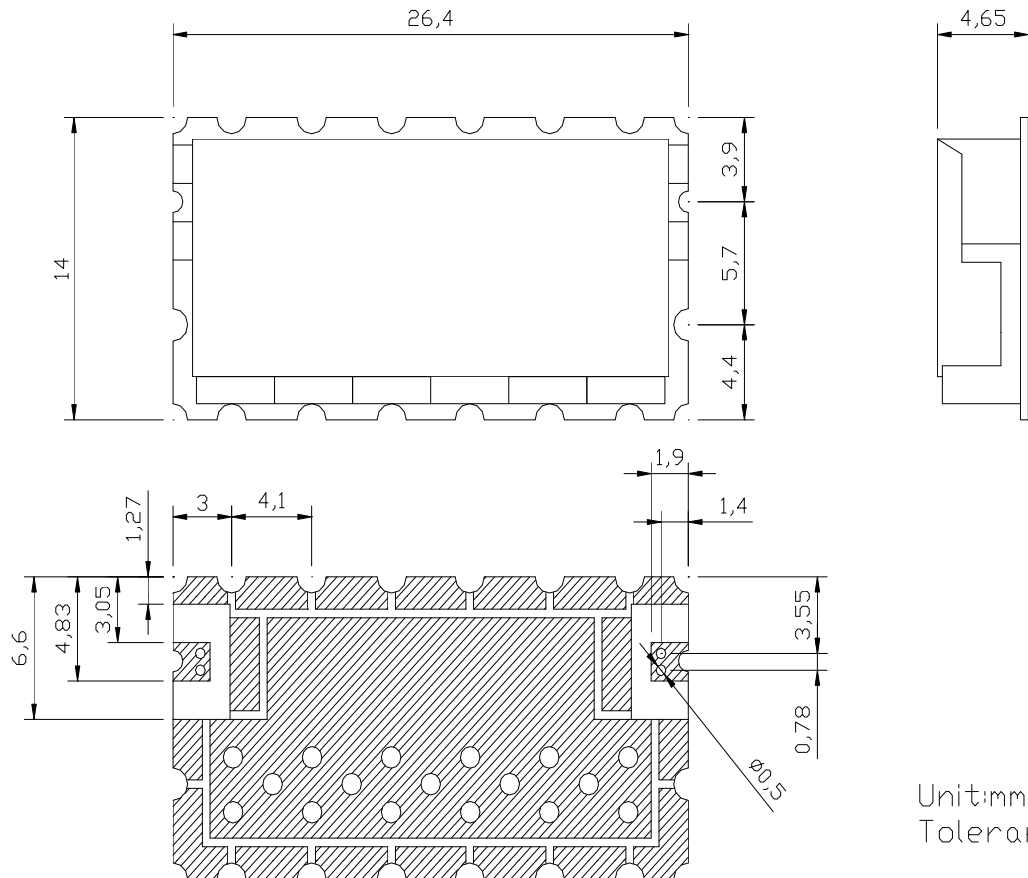

Unit:mm
Tolerance:±0.3