



IN7-3RD

700 MHz Rubber Duck Antenna

700 MHZ APXTENDER OMNIDIRECTIONAL ANTENNA

The 3 dBi APXtender Indoor Rubber Duck Omnidirectional Antenna is a high gain antenna for fixed or portable wireless equipment operating in the 700 MHz frequency range. The antenna features a 360 horizontal transmission pattern and a 50 vertical transmission pattern. The transmit/receive element can be tilted in relation to the base to direct signal where it is needed. The antennas are available in various connectors to fit most wireless radio equipment.

FEATURES

- 3 dBi gain 700 MHz omnidirectional indoor antenna
- Extends range of 700 MHz wireless access points or wireless bridges


MARKETS

- 700 MHz wireless access points
- 700 MHz wireless client bridges
- 700 MHz wireless routers
- OEM wireless equipment
- WiMAX

PARAMETER	MIN	TYP	MAX	UNITS
Frequency Range	698		806	MHz
Gain		3		DBI
VSWR		1.5:1		
Impedance		50		OHM
Input Power			10	W
Operating Temperature	-10		+60	C
Weight		1.3 (37)		oz (gr)
Dimension		6.2 x 0.6 D (157.5 x 15.2 D)		in (mm)

ORDERING INFO

IN7-3RD-SMA	3 dBi 700 Mhz APXtender	SMA Male Connector
IN7-3RD-RSMA	3 dBi 700 Mhz APXtender	Reverse Polarity SMA Connector
IN7-3RD-RTNC	3 dBi 700 Mhz APXtender	Reverse Polarity TNC Connector

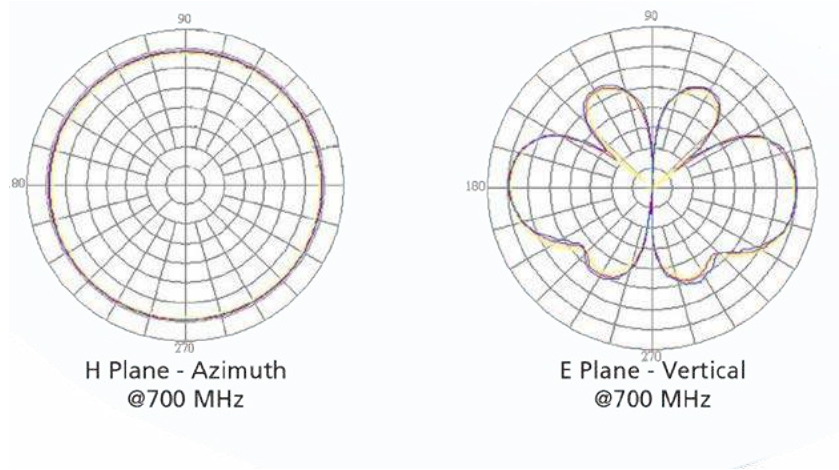

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original