


REV.	DATE	DESCRIPTION
01	Jul. 05, '18	1st RELEASE

- NOTES:
- MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
CONTACT: C5210R-EH, T=0.20mm, Au 30µ" PLATING
 - DURABILITY TEST: 100 CYCLES MIN.
 - SPECIFICATION:
DIELECTRIC STRENGTH: AC 300V/MINUTE
INSULATOR RESISTANCE: 500 Mohm MIN.
CONTACT RESISTANCE: 40 mohm MAX.
OPERATING TEMPERATURE: -40°C~+85°C
 - UNSPECIFIED TOLERANCE: .XX ±0.25
.XXX ±0.10

RoHS Compliant

PART NO		KSFP-N-PSM0-2003		
TITLE	SFP+ CONNECTOR, PITCH 0.80mm, 20 PIN SMT TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Jul. 05, '18	1 of 2

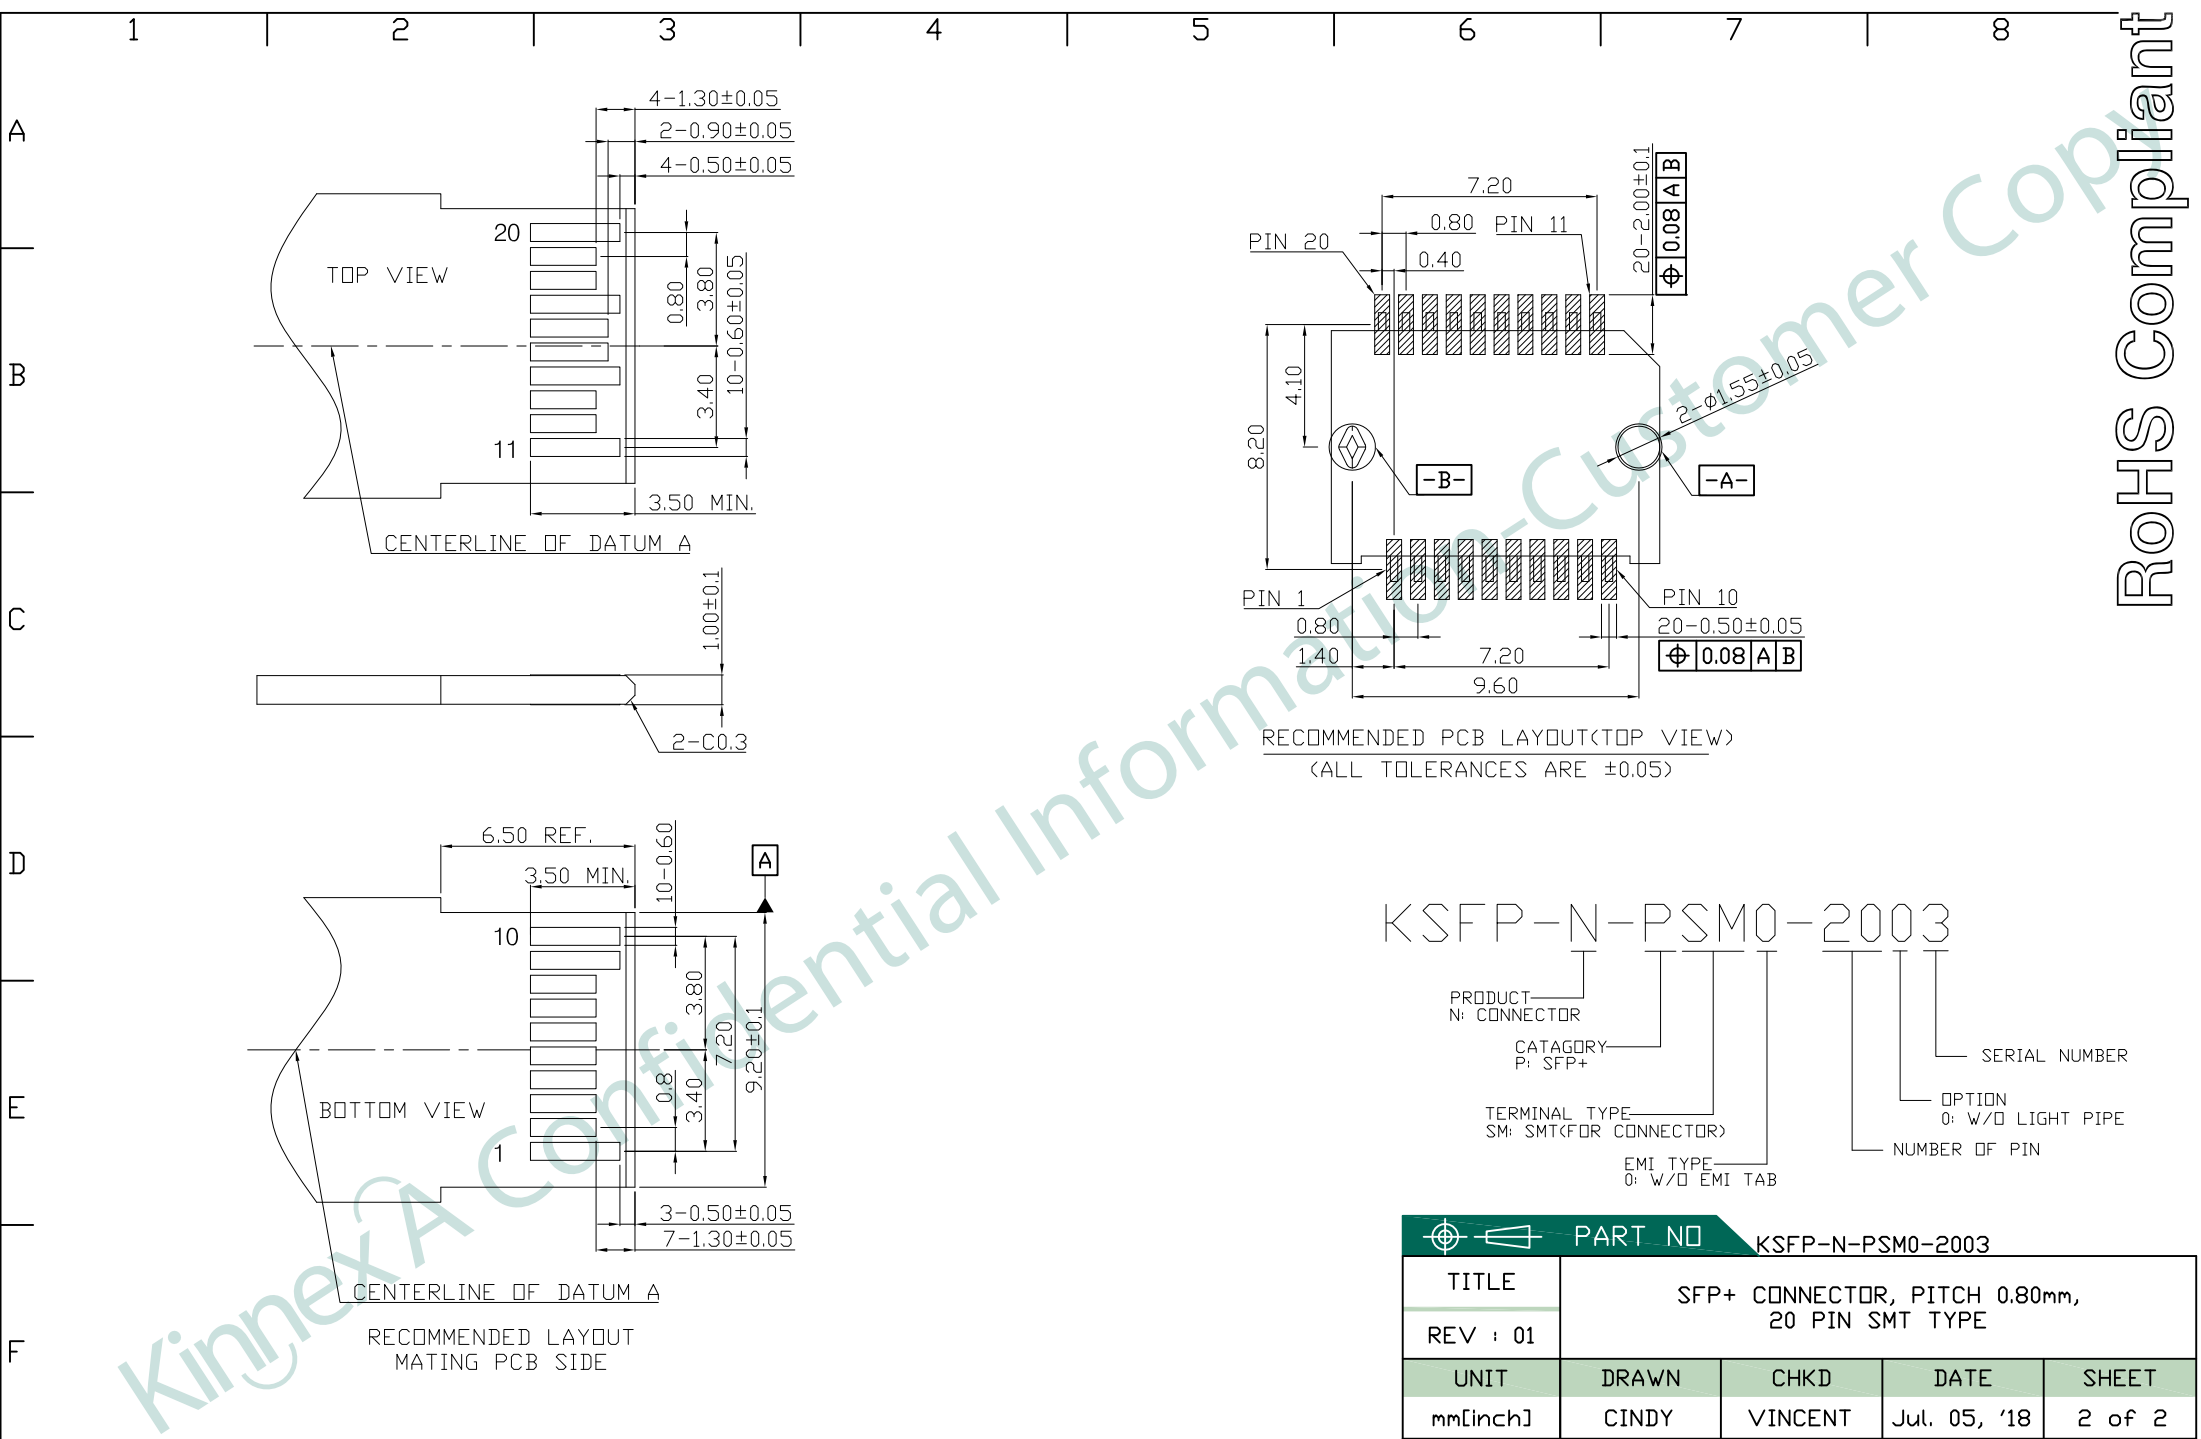

PART NO		KSFP-N-PSM0-2003		
TITLE	SFP+ CONNECTOR, PITCH 0.80mm, 20 PIN SMT TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Jul. 05, '18	2 of 2