
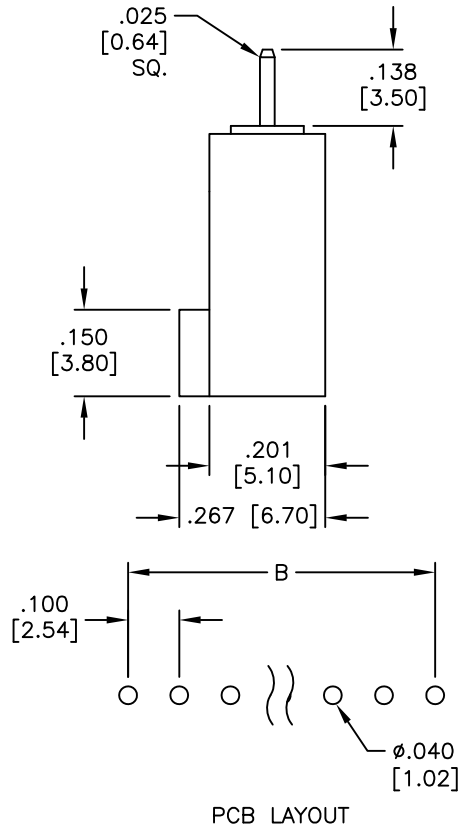
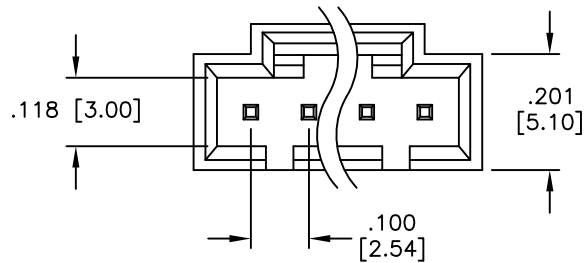


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	
A		REVISED SPEC.	3/15/12	
B		UPDATE DRAWING	1/29/18	AY/KC

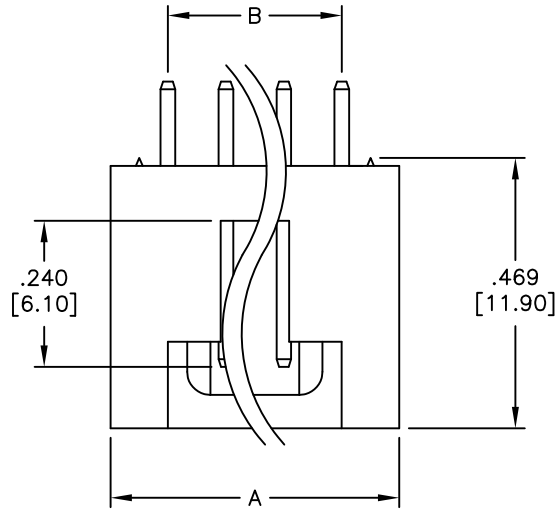

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper alloy
 Plating:
 Tin over Copper underplate overall
 Electrical:

A Voltage rating: 250 VAC/DC
 Current rating: 2.5 A
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 600 VAC for 1 minute
 Temperature Rating:
 -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



Positions: 2 thru 18

A = .100 [2.54] x No. of Positions + .100 [2.54]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

ADAM TECH INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 .100 [2.54] LATCHING HEADER
 STRAIGHT, PCB

APPROVALS		DATE
DRAWN	SS	4/7/05
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	CDR-XX-TS	B
REF:	S00016T	SCALE: NTS
SHEET 1 OF 1		