

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A,B	436450500	MicroFit 3.0 Receptacle Sgl Row 5Ckt	2	PC
C	430300001	MicroFit 3.0 F Crp Term Chn Tin 20-24	10	PC
D	--	RESIN TPE NAT SANTOPRENE	A/R	KG
E	--	MOLD PART INNER CAP	4	PC
F	--	MASTER BATCH BLACK COLOR	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	B1	5CX20AWG UNSHD BK UL2464	BLACK
A2	B2		WHITE
A3	B3		RED
A4	B4		BLUE
A5	B5		GREEN

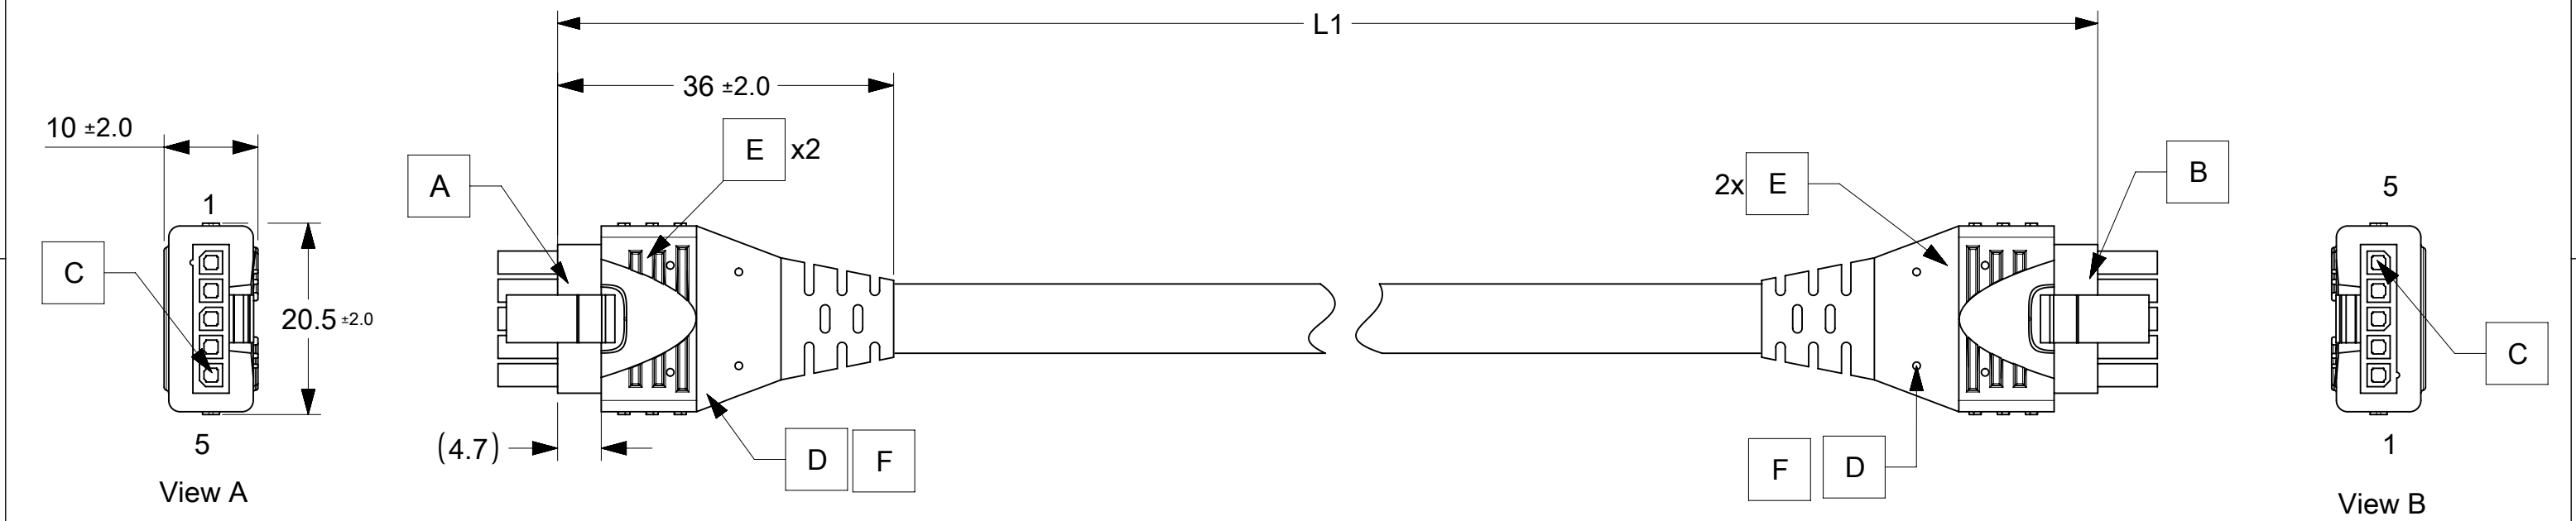


TABLE		
PART NUMBER	DESCRIPTION	L1
2147700505	5CKT OVERMOLDED MICROFIT CABLE 500MM	500±10
2147700510	5CKT OVERMOLDED MICROFIT CABLE 1M	1000±20
2147700520	5CKT OVERMOLDED MICROFIT CABLE 2M	2000±25
2147700530	5CKT OVERMOLDED MICROFIT CABLE 3M	3000±30

NOTES:

- MOLDING MATERIAL:
  - INNERCAP: PA66 NYLON RESIN.
  - OVERMOLD: SANTOPRENE TPE RESIN & MASTER BATCH BLACK.
- ELECTRICAL PERFORMANCE:
  - VOLTAGE RATING: 300V AC.
  - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
    - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
    - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
  - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
  - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		<b>molex</b>																						
	<table border="1"> <tr> <th>FUNCTIONAL SYMBOLS</th> <th>DIMENSION UNITS</th> <th>SCALE</th> </tr> <tr> <td><math>\nabla_A = 0</math></td> <td>mm</td> <td>NTS</td> </tr> <tr> <td><math>\nabla_E = 0</math></td> <td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td><math>\nabla_{E'} = 0</math></td> <td colspan="2">ANGULAR TOL ± °</td> </tr> <tr> <td rowspan="5">DIVISIONAL SYMBOLS</td> <td>4 PLACES</td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> </tr> <tr> <td>2 PLACES</td> <td>±</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> </tr> </table>	FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE	$\nabla_A = 0$	mm	NTS	$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		$\nabla_{E'} = 0$	ANGULAR TOL ± °		DIVISIONAL SYMBOLS	4 PLACES	±	3 PLACES	±	2 PLACES	±	1 PLACE	±	0 PLACES	±	EC NO: 662516 DRWN: SBS04 2021/04/30 CHK'D: MNARAYAN01 2021/05/10 APPR: MNARAYAN01 2021/05/10 INITIAL REVISION: DRWN: SBS04 2021/04/23 APPR: MNARAYAN01 2021/05/10
FUNCTIONAL SYMBOLS	DIMENSION UNITS	SCALE																								
$\nabla_A = 0$	mm	NTS																								
$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)																									
$\nabla_{E'} = 0$	ANGULAR TOL ± °																									
DIVISIONAL SYMBOLS	4 PLACES	±																								
	3 PLACES	±																								
	2 PLACES	±																								
	1 PLACE	±																								
	0 PLACES	±																								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER																			
			A3-SIZE	214770	SEE TABLE	GENERAL MARKET	1 OF 1																			