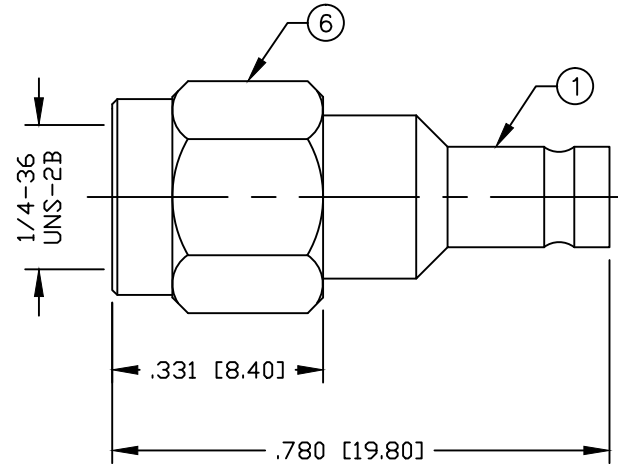


PART NO.

**RF123F-SM**

REV	DESCRIPTION	DWN	DATE	APPROVED
—	ENGINEERING RELEASE	CZS	09/14/17	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0–3 GHz  
 <–155 dBc IN PCS BAND w/2+43 dB TONES  
 WORKING VOLTAGE: 250 V rms @ sea level  
 TEMPERATURE RANGE: –65°C TO 155°C  
 INSULATION RESISTANCE: 5k M Ohms min.

6	COUPLING NUT	1	BRASS	WHITE BRONZE
5	RETAINING RING	1	SST	PASSIVATED
4	GASKET	1	RUBBER	----
3	PIN	1	BeCu	SILVER
2	INSULATOR	1	PTFE	----
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	09/14/17
CHECKED	
ORJ DRAWN C. ZUNIGA	09/14/17

**RoHS  
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
 THIS DRAWING CONTAINS  
 INFORMATION PROPRIETARY TO  
 RF INDUSTRIES. ANY  
 UNAUTHORIZED USE OF THIS  
 DRAWING IS EXPRESSLY  
 PROHIBITED WITHOUT WRITTEN  
 PERMISSION FROM RF  
 INDUSTRIES. ANY VIOLATION IS  
 PUNISHABLE UNDER U.S.  
 COPYRIGHT LAWS.

**RFconnectors**  
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX  
 RFINDUSTRIES.COM  
 7610 MIRAMAR RD.  
 SAN DIEGO, CA 92126  
 (858) 549-6340

## SMA PLUG TO 1.0/2.3 JACK ADAPTER

SIZE A	CABLE GROUP N/A	DWG NO. <b>RF123F-SM</b>	REV —
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	