


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REVISED PER ECR-13-001204	03JUL13	KH	PD

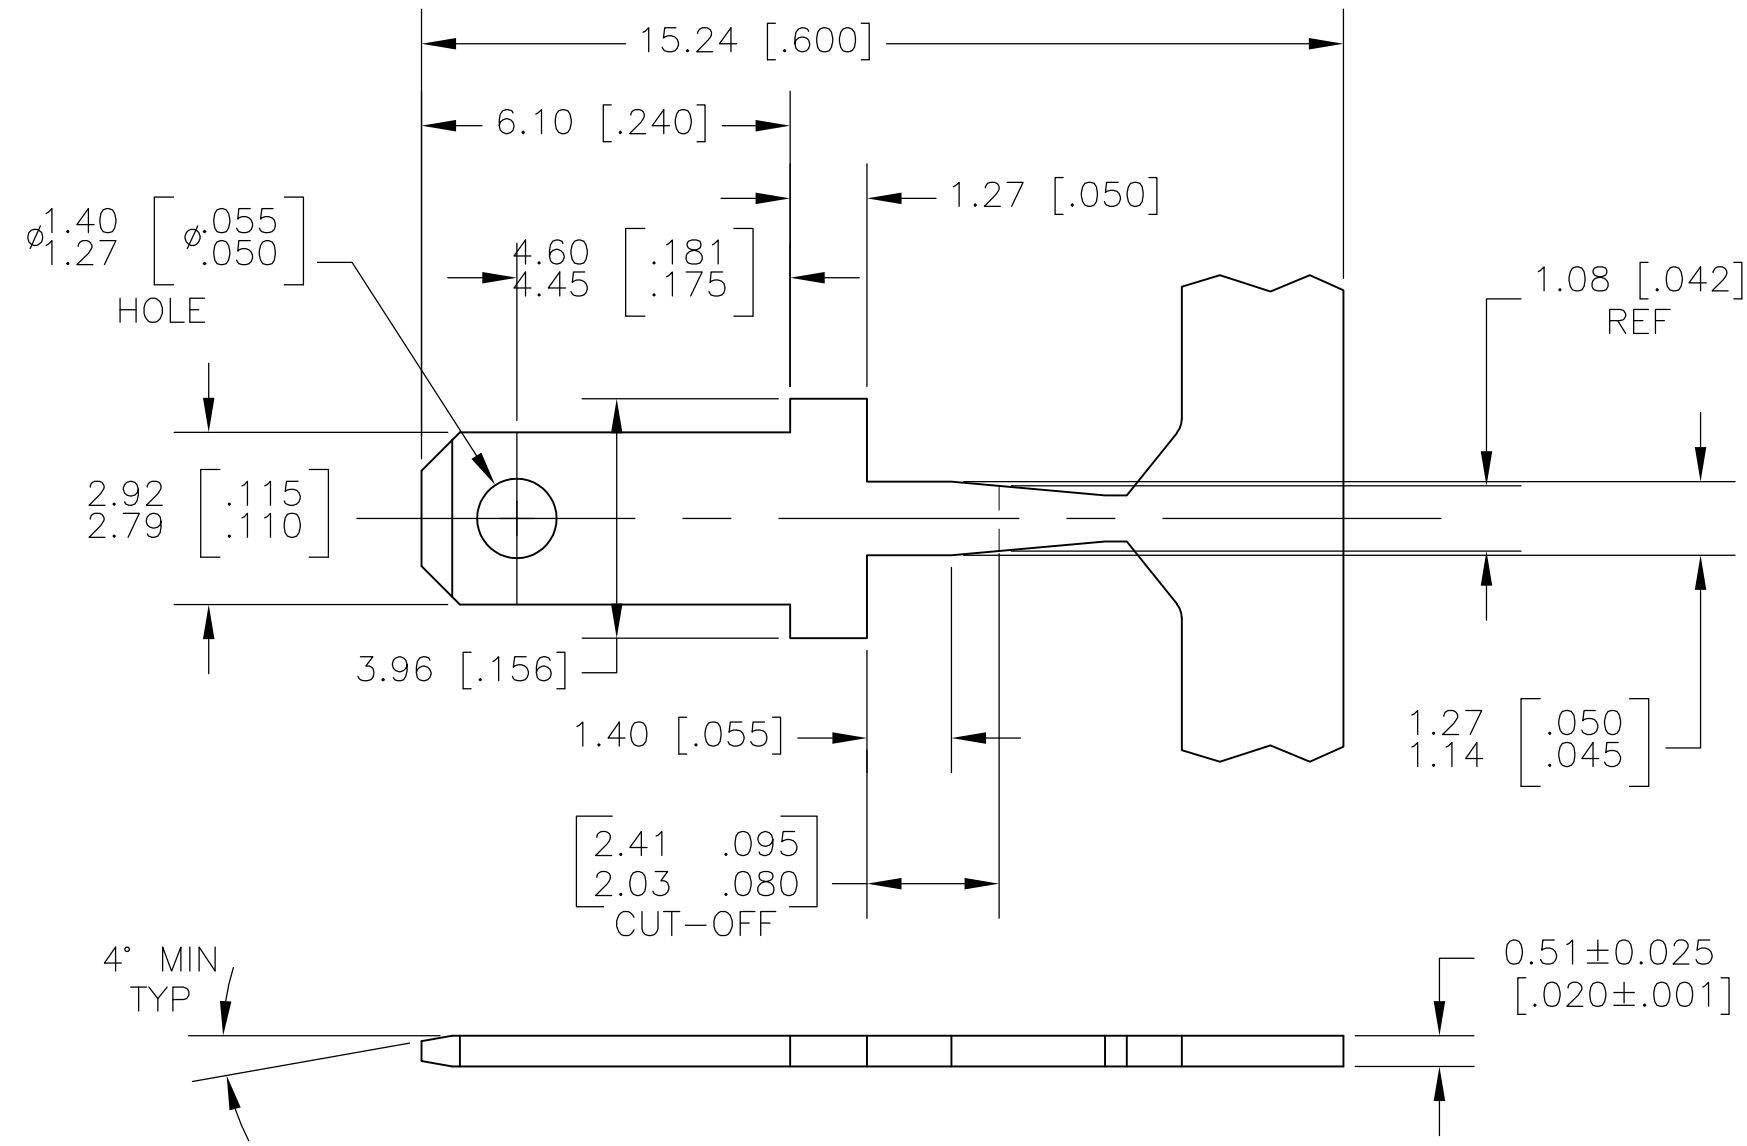

- 1 CONTINUOUS STRIP ON REELS
- 2 PART TO MEET AMP SOLDERABILITY SPEC 109-11-2 (MILDLY ACTIVATED ROSIN)
- 3 FITS 1.22/1.11 [.048/.044] DIA HOLE IN PC BOARD. WHEN PLATED THRU HOLES ARE TO BE USED, ADJUSTMENT TO HOLE DIA'S SHOULD BE MADE TO ALLOW FOR THE PLATING.
- 4 0.00381 [.000150] MIN TIN OVER 0.00254 [.000100] MIN COPPER.

1742428-1
 PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	27APR06	TE Connectivity		
DIMENSIONS: MM [INCHES]		CHK	K RANDOLPH	27APR06			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	K RANDOLPH	27APR06	NAME		
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [.010] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC		TAB, FASTON, PC BOARD, 2.79 [.110] SERIES			
MATERIAL		APPLICATION SPEC		RESTRICTED TO			
BRASS		FINISH		SIZE CAGE CODE DRAWING NO A3 00779 C-1742428			
CUSTOMER DRAWING				WEIGHT	-		
				SCALE	8:1		
				SHEET	1 OF 1		
				REV	B		