


1984
 1985
 1986
 1987
 1988
 1989
 1990
 1991
 1992
 1993
 1994
 1995
 1996
 1997
 1998
 1999
 2000
 2001
 2002
 2003
 2004
 2005
 2006
 2007
 2008
 2009
 2010
 2011
 2012
 2013
 2014
 2015
 2016
 2017
 2018
 2019
 2020
 2021
 2022
 2023
 2024
 2025

Central
 Semiconductor Corp.

Central
 Semiconductor Corp.

Central
 Semiconductor Corp.

145 Adams Avenue
 Hauppauge, New York 11788



CQ3P-25B
 CQ3P-25D
 CQ3P-25M
 CQ3P-25N

ISOLATED 30 AMP TRIAC
 200 THRU 800 VOLTS

TO-3P CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR CQ3P-25B series types are Epoxy Molded Silicon Triacs mounted on an isolated TO-3 metal platform, designed for full wave AC control applications featuring gate triggering in all four (4) quadrants.

MAXIMUM RATINGS (T_C = 25°C unless otherwise noted)


	SYMBOL	CQ3P -25B	CQ3P -25D	CQ3P -25M	CQ3P -25N	UNITS
Peak Repetitive Off-State Voltage	V _{DRM}	200	400	600	800	V
RMS On-State Current (T _C = 90°C)	I _{T(RMS)}			30		A
Peak One Cycle Surge (t = 10ms)	I _{TSM}			250		A
I ² t Value for Fusing (t = 10ms)	I ² t			312.5		A ² s
Peak Gate Power (tp = 10µs)	P _{GM}			40		W
Average Gate Power Dissipation	P _{G(AV)}			1.0		W
Peak Gate Current (tp = 10µs)	I _{GM}			10		A
Peak Gate Voltage (tp = 10µs)	V _{GM}			16		V
Critical Rate of Rise of On-State Current						
Repetitive (F = 50Hz)	di/dt			10		A/µs
Storage Temperature	T _{stg}		-40 to +150			°C
Junction Temperature	T _J		-40 to +125			°C
Thermal Resistance	θ _{J-C}			1.5		°C/W
Isolation Voltage	V _{ISO}		2500			V(RMS)

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _{DRM}	Rated V _{DRM}			0.01	mA
I _{DRM}	Rated V _{DRM} , T _C = 125°C			6.00	mA
I _{GT}	V _D = 12V, R _L = 33Ω, QUAD I,II,III			50	mA
I _{GT}	V _D = 12V, R _L = 33Ω, QUAD IV			100	mA
I _H	I _T = 500mA			80	mA
V _{GT}	V _D = 12V, R _L = 33Ω, QUAD I,II,III,IV			1.50	V
V _{TM}	I _{TM} = 42A, tp = 10ms			1.80	V
dv/dt	V _D = 2/3 V _{DRM} , R _{GK} = ∞, T _C = 125°C	250			V/µs

CQ3P-25B SERIES RATING AND CHARACTERISTIC CURVES


RMS ON-STATE CURRENT vs. CASE TEMPERATURE

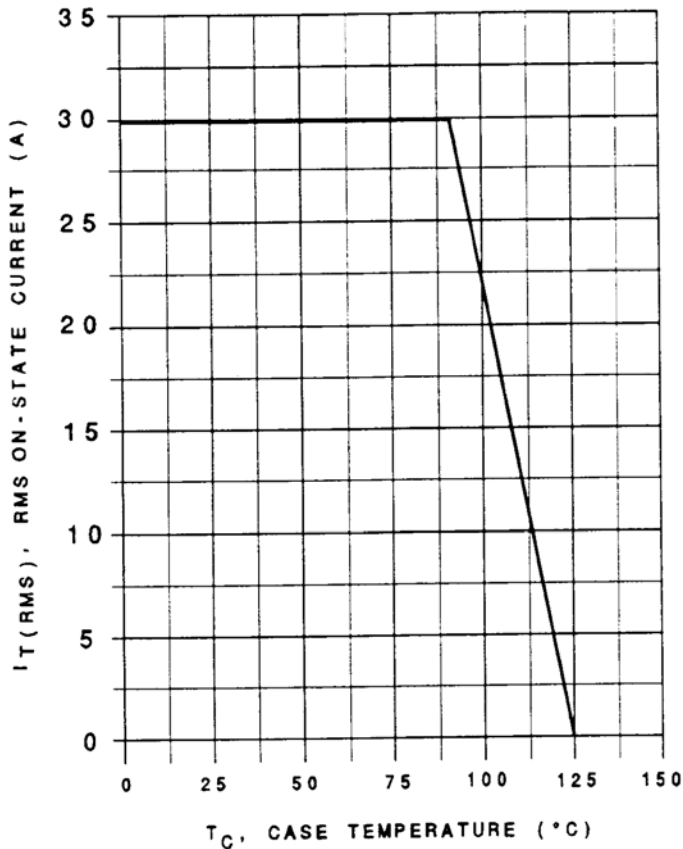

MAXIMUM ON-STATE CHARACTERISTICS

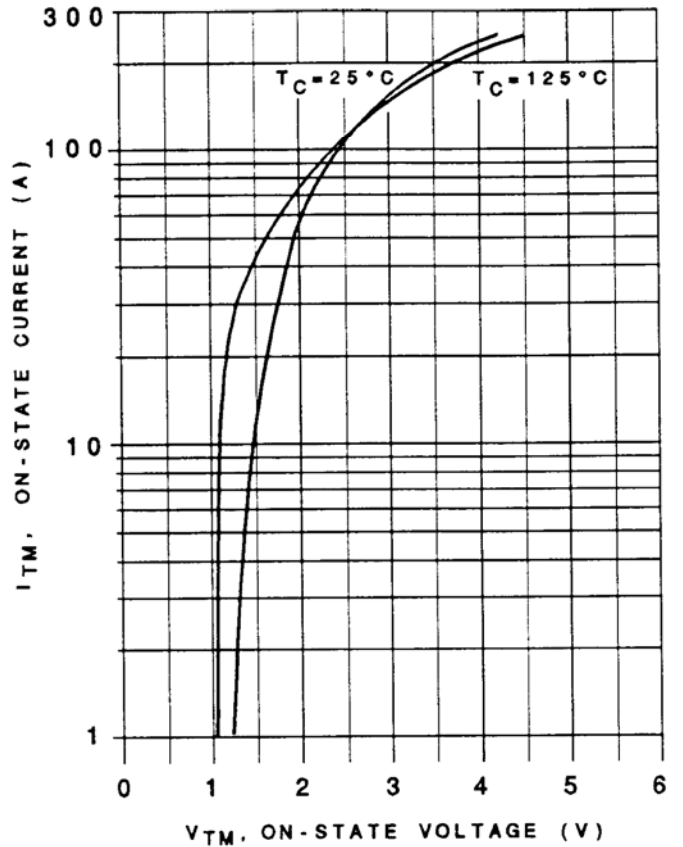

MECHANICAL OUTLINE

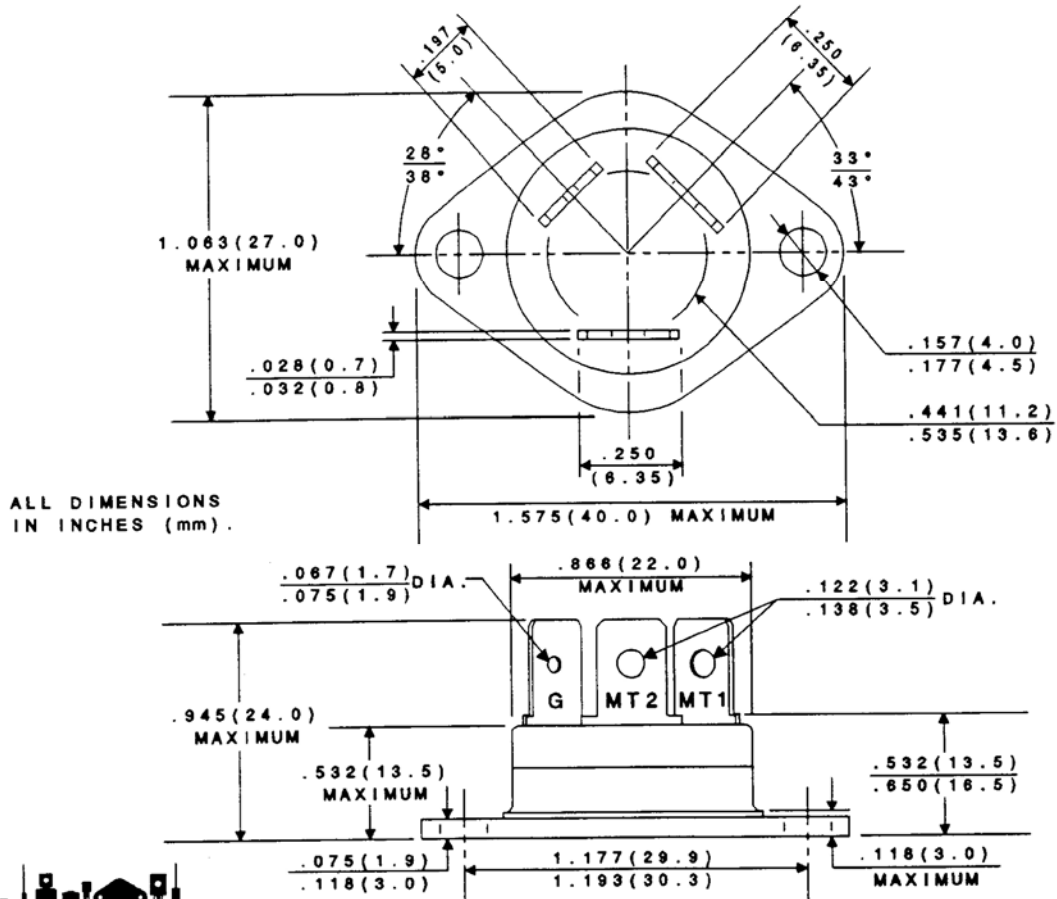

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms



<http://www.centrasemi.com>

Product End of Life Notification

PDN ID:	PDN01116
Notification Date:	2/21/19
Last Buy Date:	Stock Only
Last Shipment Date	Stock Only

Please be advised that Central Semiconductor must immediately discontinue the product(s) listed in the attached PDN notice. We are unable to accept any further orders for these products **unless** we have available inventory on hand.

You may have purchased one or more of the products listed. Please do not hesitate to contact your local Central Semiconductor sales representative with any questions or needs you may have. Central regrets any inconvenience this may cause.

Sincerely,

Central Semiconductor Corp.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

Product End of Life Notification

PDN ID:	PDN01116
Notification Date:	2/21/19
Last Buy Date:	Stock Only
Last Shipment Date	Stock Only

Summary: All TRIAC and SCR devices in the TO-3P package are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

<u>Central Part Number</u>	<u>Replacement</u>
CQ3P-25B	N/A, Stock Only
CQ3P-25D	N/A, Stock Only
CQ3P-25M	N/A, Stock Only
CQ3P-25N	N/A, Stock Only
CQ3P-40B	N/A, Stock Only
CQ3P-40D	N/A, Stock Only
CQ3P-40M	N/A, Stock Only
CQ3P-40N	N/A, Stock Only
CS3P-40B	N/A, Stock Only
CS3P-40D	N/A, Stock Only
CS3P-40M	N/A, Stock Only
CS3P-40N	N/A, Stock Only
CS3P-40P	N/A, Stock Only
CS3P-40PB	N/A, Stock Only

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centrasemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.