



- Max. toggle frequency of 700MHz
- Clock to Q max. of 1200ps
- IEE min. of -98mA
- Industry standard 100K ECL levels
- Extended supply voltage option:
VEE = -4.2V to -5.5V
- Voltage and temperature compensation for improved noise immunity
- Internal 75KΩ input pull-down resistors
- 50% faster than Fairchild 300K
- Better than 20% lower power than Fairchild
- Function and pinout compatible with Fairchild F100K
- Available in 24-pin CERPACK and 28-pin PLCC packages

The SY100S351 offers six D-type, edge-triggered, master/slave flip-flops with differential outputs, and is designed for use in high-performance ECL systems. The flip-flops are controlled by the signal from the logical OR operation on a pair of common clock signals (CP_a, CP_b). Data enters the master when both CP_a and CP_b are LOW and transfers to the slave when either CP_a or CP_b (or both) go to a logic HIGH. The Master Reset (MR) input overrides all other inputs and takes the Q outputs to a logic LOW. The inputs on this device have 75KΩ pull-down resistors.

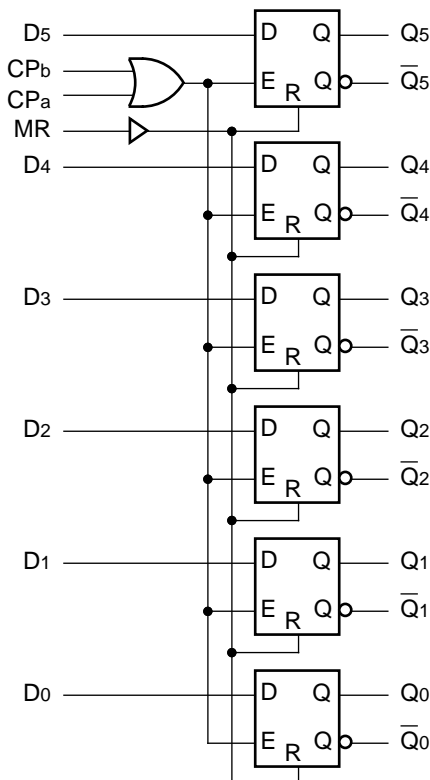

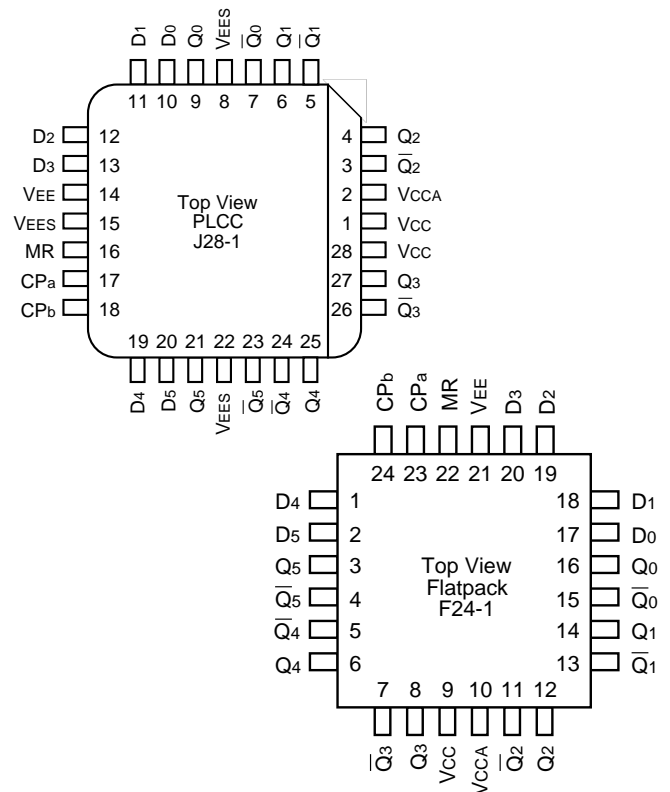

Pin	Function
D ₀ — D ₅	Data Inputs
CP _a , CP _b	Common Clock Inputs
MR	Asynchronous Master Reset Input
Q ₀ — Q ₅	Data Outputs
\overline{Q}_0 — \overline{Q}_5	Complementary Data Outputs
VEES	VEE Substrate
VCCA	VCCO for ECL Outputs



Asynchronous Operation ⁽¹⁾				
Inputs				Outputs
D _n	CP _a	CP _b	MR	Q _n (t+1)
X	X	X	H	L

Synchronous Operation ⁽¹⁾				
Inputs				Outputs
D _n	CP _a	CP _b	MR	Q _n (t+1)
L	u	L	L	L
H	u	L	L	H
L	L	u	L	L
H	L	u	L	H
X	H	u	L	Q _n (t)
X	u	H	L	Q _n (t)
X	L	L	L	Q _n (t)

NOTE:

- 1. H = High Voltage Level
- L = Low Voltage Level
- X = Don't Care
- t = Time before CP Positive Transition
- t+1 = Time after CP Positive Transition
- u = LOW-to-HIGH Transition



VEE = -4.2V to -5.5V unless otherwise specified; VCC = VCCA = GND

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
I _{IH}	Input HIGH Current MR D ₀ – D ₅ CP _a , CP _b	—	—	270 200 300	μA	V _{IN} = V _{IH} (Max.)
I _{EE}	Power Supply Current	-98	-71	-49	mA	Inputs Open

CERPACK


$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	TA = 0°C		TA = +25°C		TA = +85°C		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.		
fMAX	Toggle Frequency	700	—	700	—	700	—	MHz	
tPLH tPHL	Propagation Delay CPa, CPb to Output	—	1200	—	1200	—	1200	ps	
tPLH tPHL	Propagation Delay MR to Output	—	1200	—	1200	—	1200	ps	
tTLH tTHL	Transition Time 20% to 80%, 80% to 20%	300	900	300	900	300	900	ps	
ts	Set-up Time D0–D5 MR (Release Time)	500 1000	— —	500 1000	— —	500 1000	— —	ps	
th	Hold Time, D0–D5	550	—	550	—	550	—	ps	
tPW (H)	Pulse Width HIGH CPa, CPb, MR	1000	—	1000	—	1000	—	ps	

PLCC

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$


Symbol	Parameter	TA = 0°C		TA = +25°C		TA = +85°C		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.		
fMAX	Toggle Frequency	700	—	700	—	700	—	MHz	
tPLH tPHL	Propagation Delay CPa, CPb to Output	—	1200	—	1200	—	1200	ps	
tPLH tPHL	Propagation Delay MR to Output	—	1200	—	1200	—	1200	ps	
tTLH tTHL	Transition Time 20% to 80%, 80% to 20%	300	900	300	900	300	900	ps	
ts	Set-up Time D0–D5 MR (Release Time)	500 1000	— —	500 1000	— —	500 1000	— —	ps	
th	Hold Time, D0–D5	550	—	550	—	550	—	ps	
tPW (H)	Pulse Width HIGH CPa, CPb, MR	1000	—	1000	—	1000	—	ps	

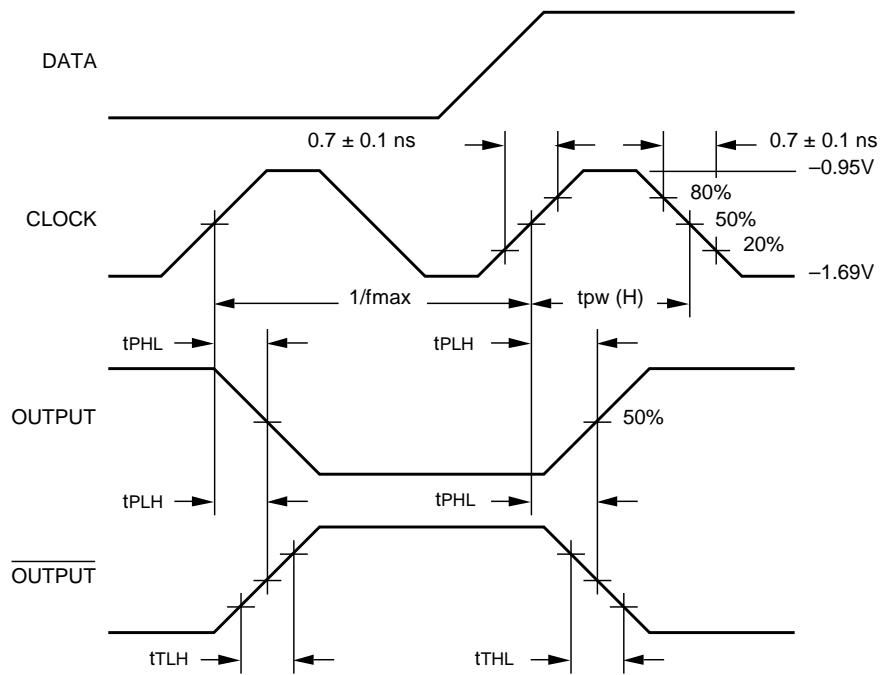


Propagation Delay (Clock) and Transition Times

NOTE:

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

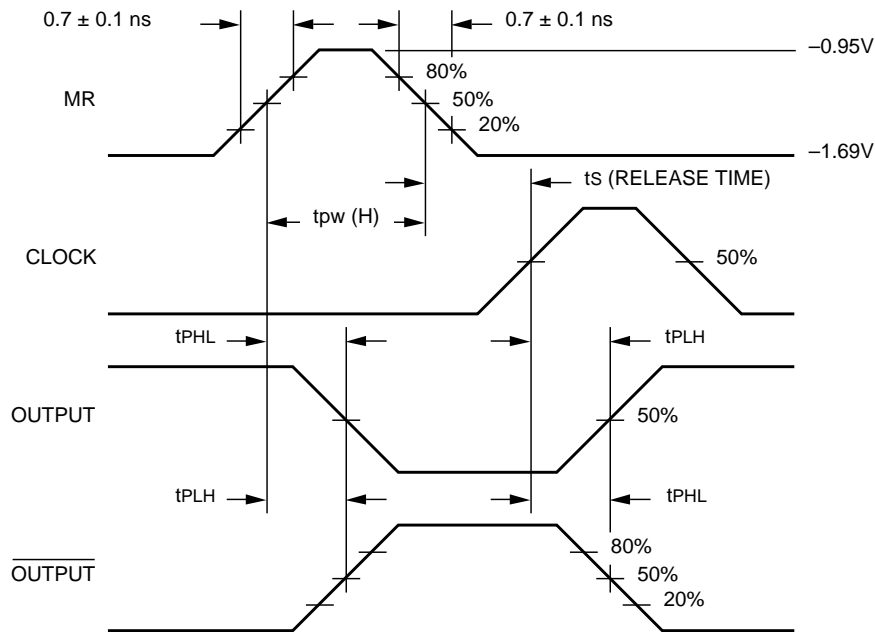

Propagation Delay (Resets)

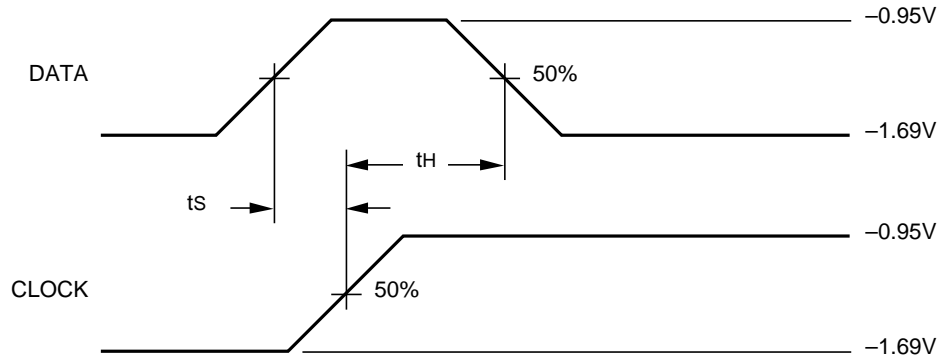


Data Set-up and Hold Time

NOTES:


1. $V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$
2. t_s is the minimum time before the transition of the clock that information must be present at the data input.
3. t_h is the minimum time after the transition of the clock that information must remain unchanged at the data input.

Ordering Code	Package Type	Operating Range
SY100S351FC	F24-1	Commercial
SY100S351JC	J28-1	Commercial
SY100S351JCTR	J28-1	Commercial

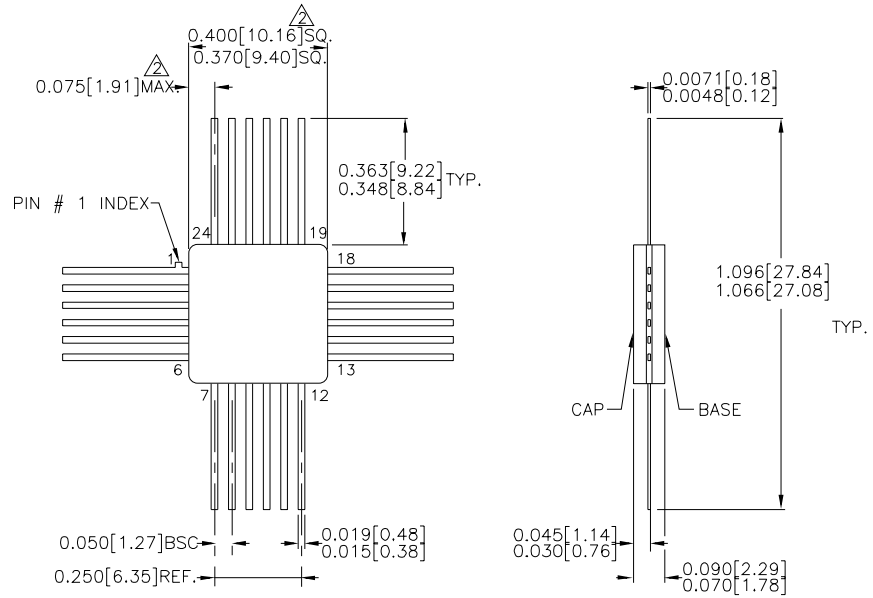

- NOTES:
1. DIMENSIONS ARE IN INCHES[MM].
 2. THIS DIMENSION INCLUDES GLASS PROTRUSION AND CAP TO BASE ALIGNMENT TOLERANCES.
 3. DIMENSIONS SHOWN ARE MAX/MIN, WHERE NOTED.

Rev. 03

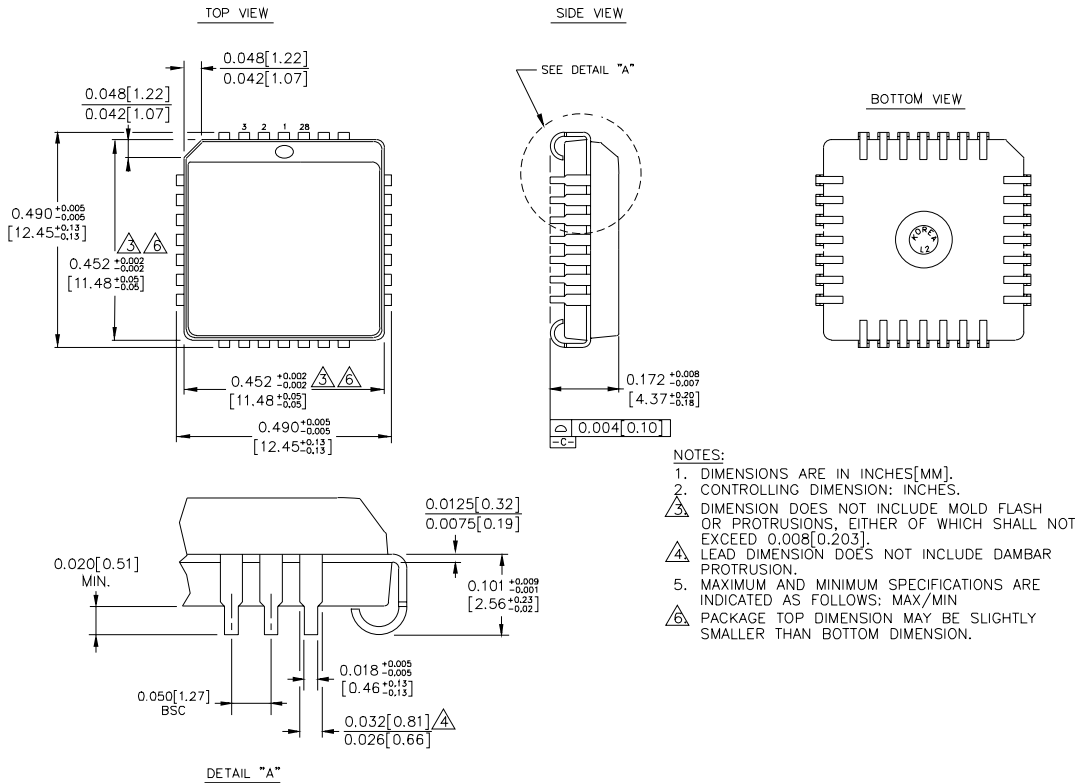

Rev. 03

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated