
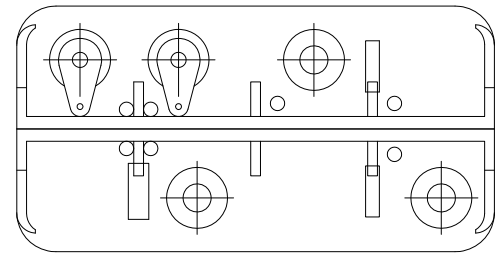
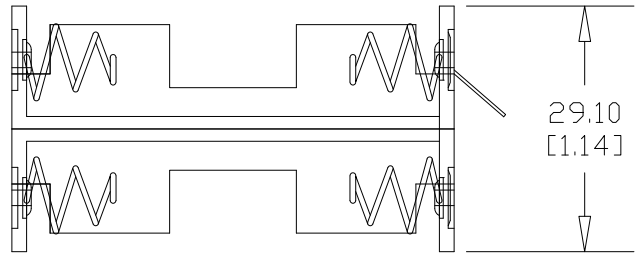



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
2/24/07	A	(1)Redrawn (2)Added "ROHS COMPLIANT"	T.B.	B.S.	
10/17/14	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
06/27/17	C	DIM. 29.10 WAS 29.50	T.B.	B.S.	

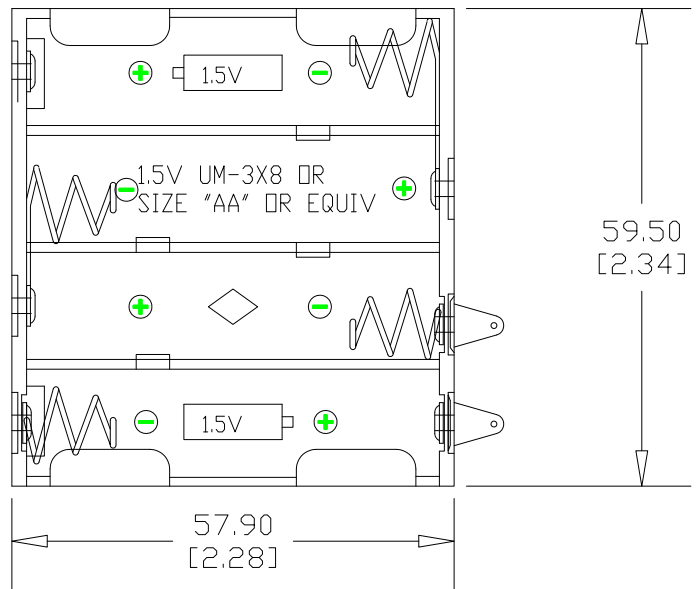

NOTES:
MATERIAL:
HOUSING: POLYPROPYLENE
FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
TEMPERATURE RANGE: -10°C to +100°C
SPRINGS: SPRING STEEL, NICKEL PLATED
LUGS: BRASS, NICKEL PLATED
RIVETS: BRASS, NICKEL PLATED
CONTACT RESISTANCE: UNDER 50m Ohms FOR +/- CONTACTS PER EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.	
Fractional ± .8 (.030)	Title EIGHT "AA" BATTERY HOLDER WITH SOLDER LUGS		
Angular ± 3°	Date 06/27/17	Drawing Number BH48AAL	