


RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

550-560 Series UBC™ Ultra-Broadband Capacitor

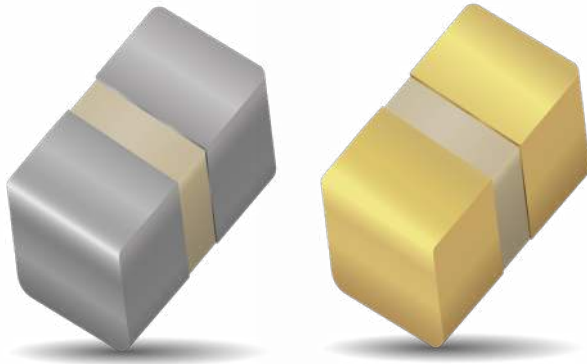

GENERAL DESCRIPTION

KYOCERA AVX new Ultra-Broadband Capacitor is manufactured with highest quality materials to provide reliable and repeatable Ultra-Broadband performance from 7KHz through 110GHz. It exhibits ultra-low insertion loss, flat frequency response and excellent return loss, and is ideal for D.C. Blocking, Coupling, Bypassing and Feedback applications requiring Ultra-Broadband performance.

TYPICAL CIRCUIT APPLICATIONS

- Optoelectronics/High Speed Data
- Transimpedance amplifiers
- Receive and Transmit Optical Sub-Assembly (ROSA/TOSA)
- Synchronous Optical Network (SONET)
- Broadband test equipment
- Broadband Microwave/Millimeter Wave

ADVANTAGES

- Ultra-Broadband performance
 - Ultra-Low Insertion Loss
 - Flat Frequency Response
 - Excellent Return Loss
 - Unit-to-Unit Performance Repeatability
 - Rugged Ceramic Construction
 - Operating Temperature: -55°C to +125°C
- Note: See voltage below on the table at certain temp.*

HOW TO ORDER

550 T Series 550	Z T Case Size W = 01005 Z = 0201 L = 0402	104 T Capacitance Code EIA Capacitance Code in pF. First two digits = significant figures or "R" for decimal place. Third digit = number of zeros or after "R" significant figures	K T Capacitance Tolerance Code K = ±10% M = ±20% P = +100%, -0% V = +20%, -10% Y = +25%, -20%	T T Termination Style Code T = Tin Plated over Nickel Barrier (Standard) CA = Gold Plated over Nickel Barrier	T T Packaging T = 1000 pc qty. T/500 = 500 pc qty. T/4k = 4000 pc qty. Z = 15K pc for 0201, 20kpc for 01005
----------------------------------	---	--	---	--	--



ELECTRICAL SPECIFICATIONS

Series	Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish	Packaging
550W103M	01005	160kHz	110GHz	10	35	25	16	Tin	T, Z
560W104M	01005	16kHz	40GHz	100	6.3	4	--	Tin	
560Z104M	0201	16kHz	40GHz	100	25	16	6.3	Tin	
550Z104M	0201	16kHz	110GHz	100	25	16	6.3	Tin	
560Z224M	0201	7.2kHz	40GHz	220	16	10	--	Tin	
550Z224M	0201	7.2kHz	70GHz	220	16	10	--	Tin	
550Z103P	0201	160kHz	100GHz	10	10	10	6.3	Tin/Gold	T T/500 T/4K
560L104Y	0402	16kHz	40GHz	100	16	16	16	Tin	
550L104K	0402	16kHz	70GHz	100	16	16	16	Tin/Gold	

Click on part number to see performance data and download files

RF/Microwave Capacitors


RF/Microwave Multilayer Capacitors (MLC)

550-560 Series UBC™ Ultra-Broadband Capacitor



GENERAL DIMENSIONS

		560W104	560Z104	560Z224	560L104
L (Length)	mm	0.40 ± 0.02	0.60 ± 0.03	0.60 ± 0.03	1.0 ± 0.1
	(in)	(0.016 ± 0.0008)	(0.024 ± 0.001)	(0.024 ± 0.001)	(0.040 ± 0.004)
W (Width)	mm	0.20 ± 0.02	0.30 ± 0.03	0.30 ± 0.03	0.5 ± 0.1
	(in)	(0.008 ± 0.0008)	(0.011 ± 0.001)	(0.011 ± 0.001)	(0.020 ± 0.004)
T (Thickness)	mm	0.22 Max	0.22 Max	0.33 Max	0.6 Max
	(in)	0.009 Max	0.009 Max	0.013 Max	0.024 Max
t (Terminal)	mm	0.135 ± 0.035	0.15 ± 0.05	0.15 ± 0.05	0.36 ± 0.08
	(in)	(0.005 ± 0.0014)	(0.006 ± 0.002)	(0.006 ± 0.002)	(0.014 ± 0.003)

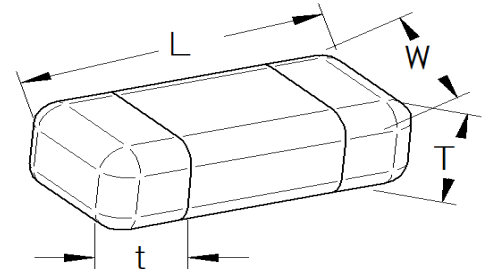


		550W103	550Z103	550Z104	550Z224	550L104
L (Length)	mm	0.40 ± 0.02	0.58 ± 0.03	0.60 ± 0.03	0.60 ± 0.03	1.0 ± 0.1
	(in)	(0.016 ± 0.0008)	(0.023 ± 0.001)	(0.024 ± 0.001)	(0.024 ± 0.001)	(0.040 ± 0.004)
W (Width)	mm	0.20 ± 0.02	0.30 ± 0.03	0.30 ± 0.03	0.30 ± 0.03	0.5 ± 0.1
	(in)	(0.008 ± 0.0008)	(0.011 ± 0.001)	(0.011 ± 0.001)	(0.011 ± 0.001)	(0.020 ± 0.004)
T (Thickness)	mm	0.2 Max	0.33 Max	0.22 Max	0.33 Max	0.6 Max
	(in)	0.008 Max	0.013 Max	0.009 Max	0.013 Max	0.024 Max
t (Terminal)	mm	0.135 ± 0.035	0.20 ± 0.04	0.23 ± 0.05	0.23 ± 0.05	0.42 ± 0.08
	(in)	(0.005 ± 0.0014)	(0.008 ± 0.0015)	(0.009 ± 0.002)	(0.009 ± 0.002)	(0.0165 ± 0.0030)

REFLOW SOLDERING

560		01005	0201	0402
a	mm	0.10 - 0.15	0.20 - 0.25	0.40 - 0.60
	(in)	(0.004 - 0.006)	(0.008 - 0.010)	(0.016 - 0.024)
b	mm	0.13 - 0.19	0.25 - 0.35	0.40 - 0.50
	(in)	(0.005 - 0.007)	(0.010 - 0.014)	(0.016 - 0.020)
c	mm	0.20 - 0.23	0.30 - 0.40	0.50 - 0.75
	(in)	(0.008 - 0.009)	(0.012 - 0.016)	(0.020 - 0.030)

550		01005	0201	0402
a	mm	0.10 - 0.15	0.10 - 0.15	0.15 - 0.20
	(in)	(0.004 - 0.006)	(0.004 - 0.006)	(0.006 - 0.008)
b	mm	0.13 - 0.19	0.30 - 0.40	0.50 - 0.62
	(in)	(0.005 - 0.007)	(0.012 - 0.016)	(0.020 - 0.025)
c	mm	0.20 - 0.23	0.30 - 0.40	0.50 - 0.75
	(in)	(0.008 - 0.009)	(0.012 - 0.016)"	(0.020 - 0.030)

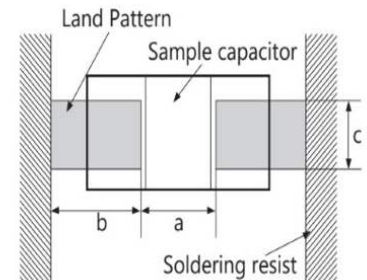

Parts are sensitive to orientation. Maintain packaging orientation for typical performance.

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

550-560 Series UBC™ Ultra-Broadband Capacitor



550W103M

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
01005	160kHz	110GHz	10	35	25	16	Tin





CLICK HERE TO DOWNLOAD DATA FILES

*Data files contain DXF and S2P files

[Click here to return to main table](#)

PERFORMANCE DATA

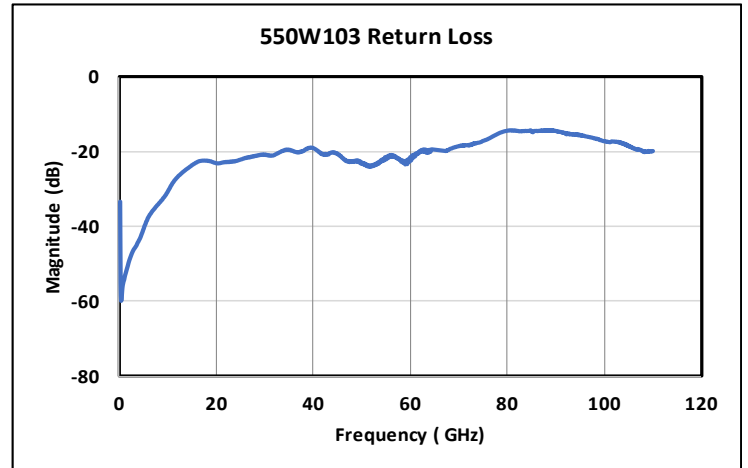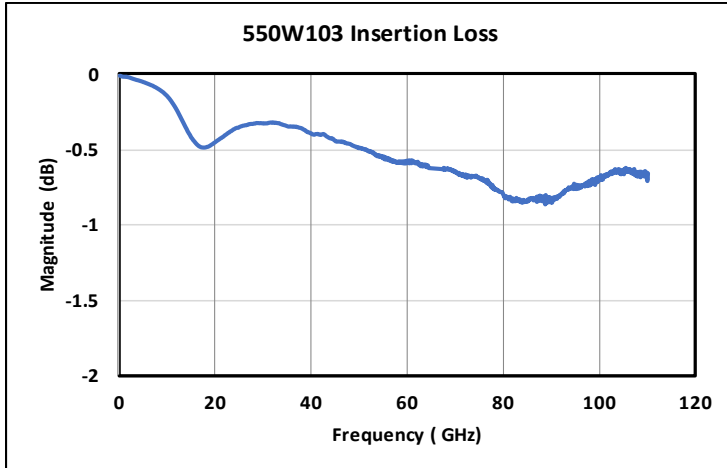

550W Data Sheet Test Condition Description

All testing performed on 5-mil-thick Rogers RO3003 board using recommended footprint.(nominal 50-ohm characteristic impedance) @ Modelithics.


560W104M

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
01005	16kHz	40GHz	100	6.3	4	--	Tin


[Click here to return to main table](#)

PERFORMANCE DATA

Series Insertion Loss (S21)

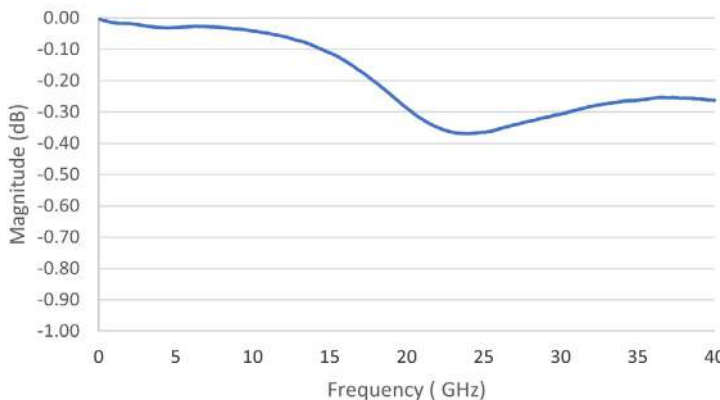

Series Return Loss (S11)

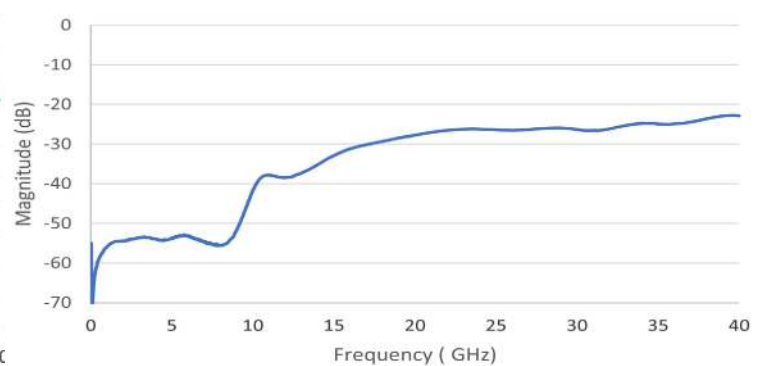

560W Data Sheet Test Condition Description

All testing performed on 10-mil-thick Rogers RO3006 microstrip board, with the device under test subtending a 4 mil gap in a 14.2-mil-wide center trace (nominal 50-ohm characteristic impedance).



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

550-560 Series UBC™ Ultra-Broadband Capacitor



560Z104M

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
0201	16kHz	40GHz	100	25	16	6.3	Tin





CLICK HERE TO DOWNLOAD DATA FILES

*Data files contain DXF and S2P files

[Click here to return to main table](#)

PERFORMANCE DATA

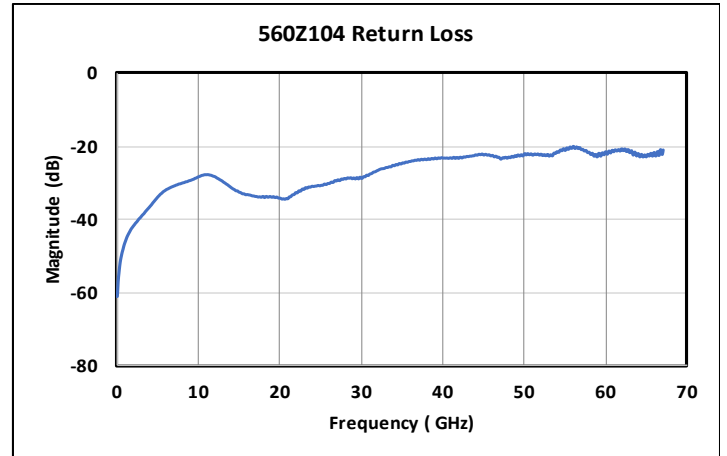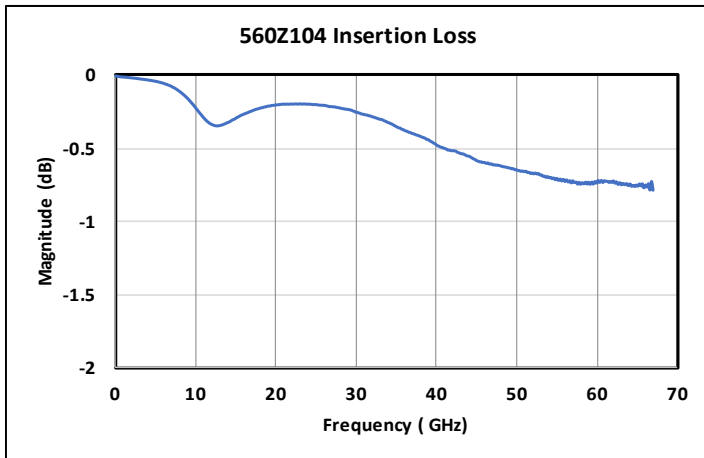

560Z Data Sheet Test Condition Description

All testing performed on 5-mil-thick Rogers RO3003 board using recommended footprint. (nominal 50-ohm characteristic impedance) @ Modelithics.

550Z104M

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
0201	16kHz	110GHz	100	25	16	6.3	Tin





CLICK HERE TO DOWNLOAD DATA FILES

*Data files contain DXF and S2P files

[Click here to return to main table](#)

PERFORMANCE DATA

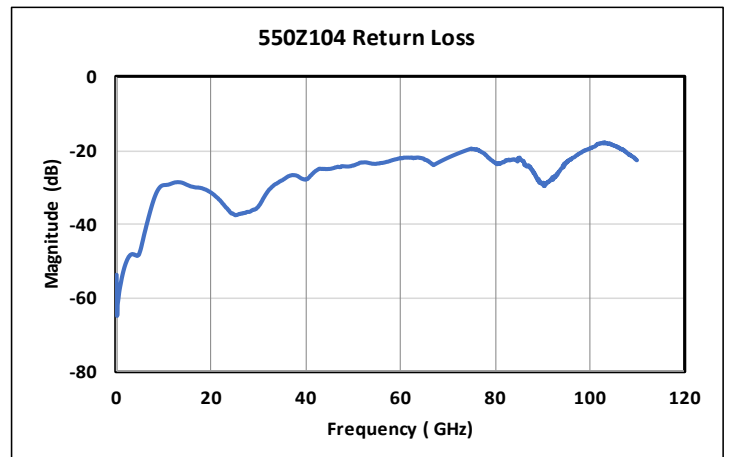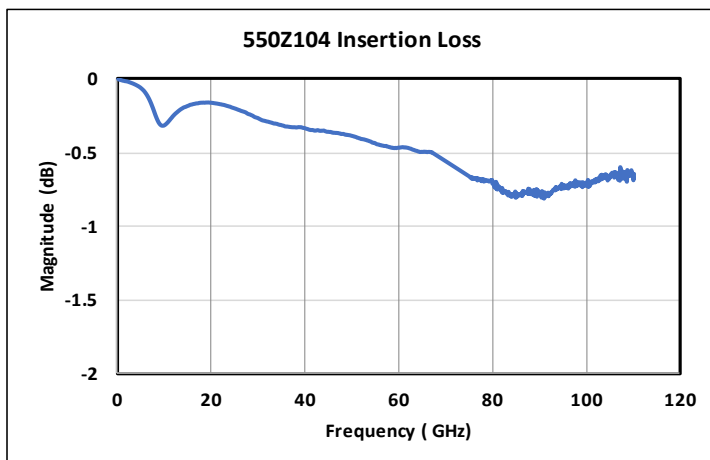

550Z Data Sheet Test Condition Description

All testing performed on 5-mil-thick Rogers RO3003 board using recommended footprint. (nominal 50-ohm characteristic impedance) @ Modelithics.

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

550-560 Series UBC™ Ultra-Broadband Capacitor



560Z224M

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
0201	7.2kHz	40GHz	220	16	10	--	Tin





CLICK HERE TO DOWNLOAD DATA FILES

*Data files contain DXF and S2P files

[Click here to return to main table](#)

PERFORMANCE DATA

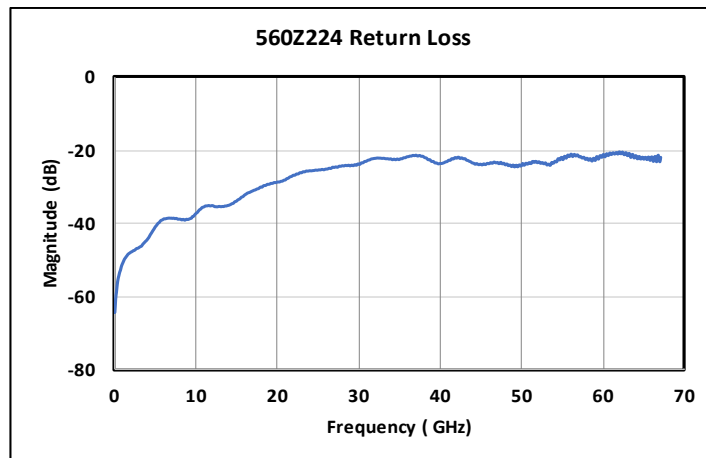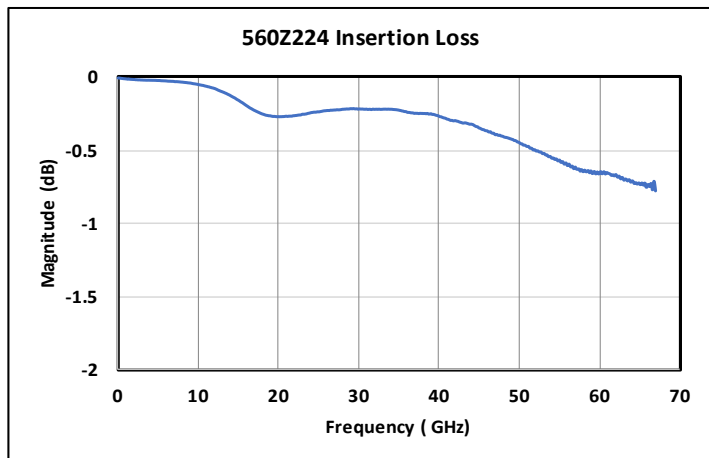

560Z Data Sheet Test Condition Description

All testing performed on 5-mil-thick Rogers RO3003 board using recommended footprint. (nominal 50-ohm characteristic impedance) @ Modelithics.

550Z224M

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
0201	7.2kHz	70GHz	220	16	10	--	Tin





CLICK HERE TO DOWNLOAD DATA FILES

*Data files contain DXF and S2P files

[Click here to return to main table](#)

PERFORMANCE DATA

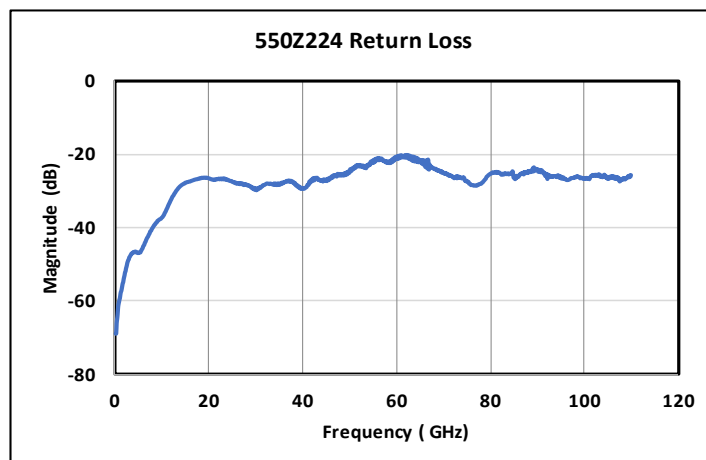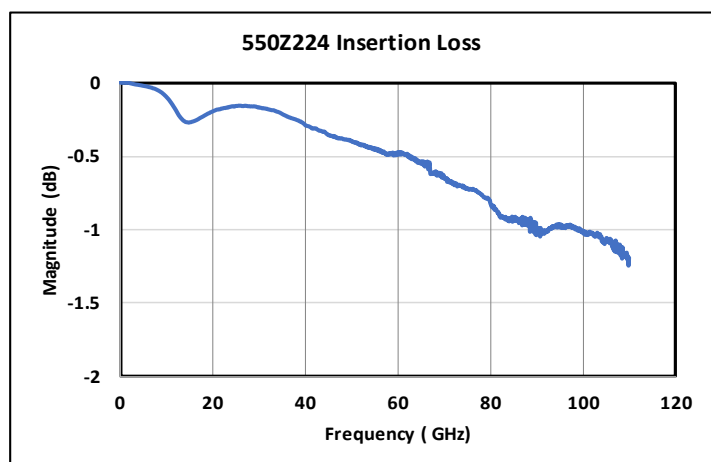

550Z Data Sheet Test Condition Description

All testing performed on 5-mil-thick Rogers RO3003 board using recommended footprint. (nominal 50-ohm characteristic impedance) @ Modelithics.



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

550-560 Series UBC™ Ultra-Broadband Capacitor



550Z103P

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
0201	160kHz	100GHz	10	10	10	6.3	Tin/Gold





CLICK HERE TO DOWNLOAD DATA FILES

*Data files contain DXF and S2P files

[Click here to return to main table](#)

PERFORMANCE DATA

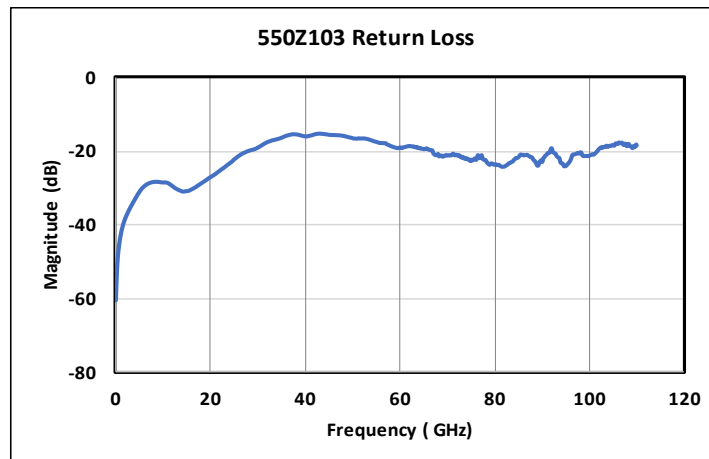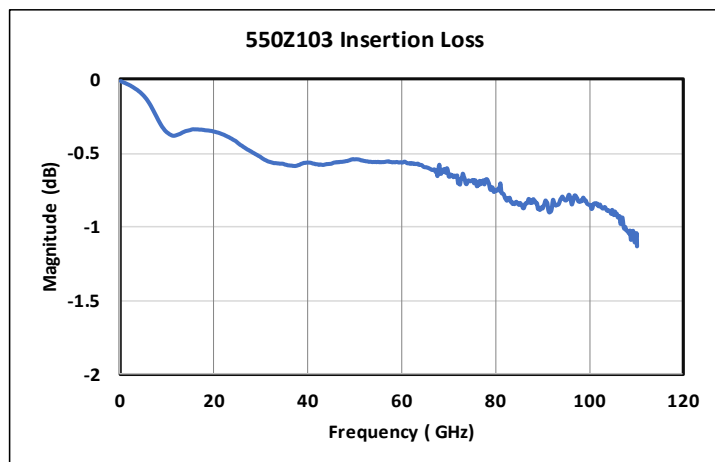

550Z Data Sheet Test Condition Description



All testing performed on 5-mil-thick Rogers RO3003 board using recommended footprint. (nominal 50-ohm characteristic impedance) @ Modelithics.

560L104Y

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
0402	16kHz	40 GHz	100	16	16	16	Tin/Gold

[Click here to return to main table](#)

PERFORMANCE DATA

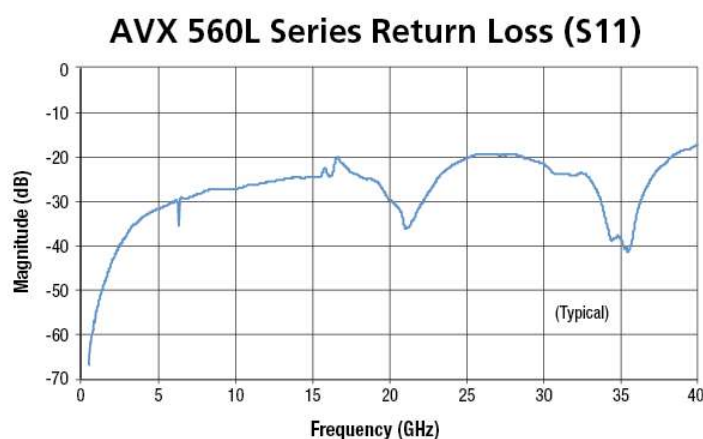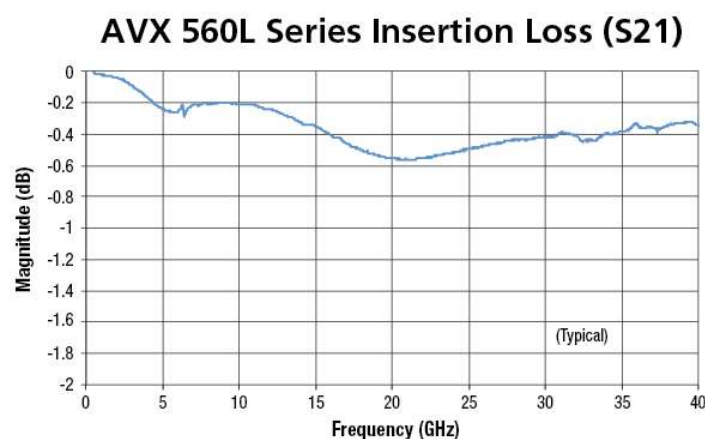

560L Data Sheet Test Condition Description

All testing performed on 10 mil-thick rogers RO4350B microstrip board, with the device under test subtending a 24 mil gap in a 22 mil-wide center trace (nominal 50 ohms characteristic impedance).

RF/Microwave Capacitors
RF/Microwave Multilayer Capacitors (MLC)
550-560 Series UBC™ Ultra-Broadband Capacitor



550L104K

Size (EIA)	Min Frequency	Max Frequency	Cap (nF)	WVDC (85C)	WVDC (105C)	WVDC (125C)	Finish
0402	16kHz	70GHz	100	16	16	16	Tin/Gold




CLICK HERE TO DOWNLOAD DATA FILES

*Data files contain DXF and S2P files


PERFORMANCE DATA

[Click here to return to main table](#)

550L Series Insertion Loss (S21)

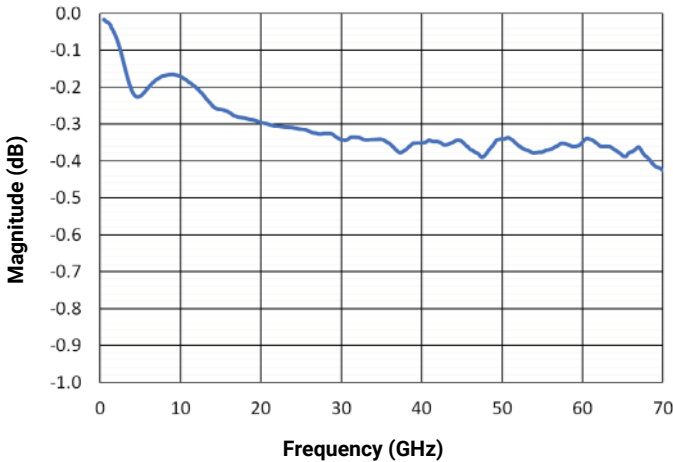

550L Series Return Loss (S11)

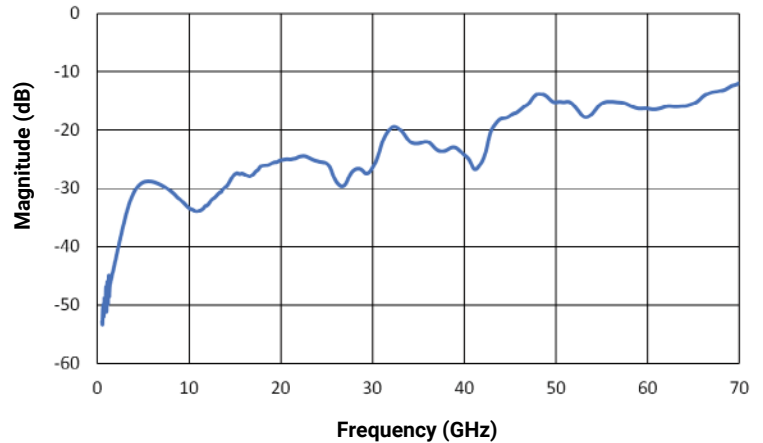

550L Data Sheet Condition Description

All testing performed on 10 mil-thick rogers RO4350B microstrip board, with the device under test subtending a 24 mil gap in a 22 mil-wide center trace (nominal 50 ohms characteristic impedance).

SIMULATION MODELS



KYOCERA AVX and Modelithics have partnered to offer FREE 90-Day trials of highly accurate, scalable advanced simulation models for various KYOCERA AVX parts including **THIS** part as well as Attenuators, Capacitors, Couplers, Inductors, Diplexers, Resistors.

For More Information, Please Visit: <https://www.modelithics.com/mvp/avx>
 Use Promo Code: AVXWP