

# ISC-1112 / ISC-1112-I



## Industrial RS-232 to RS-422/485 Serial Media Converter

- Support multiple baud rate and multiple data format
- Support highest power output
- Auto Hardware Direction Control for RS-485
- Auto switching baud rate from 300 ~ 115200 bps
- Power requirements from +9 ~ 30 VDC
- ABS with captive mounting hardware design
- DIN-Rail and wall mounting enabled




## Introduction

ISC-1112 series are industrial media converters provide media conversion between RS-232 and RS-422/485 interface. ISC-1112 series are ABS housing design and supporting an operating temperature of -10 to 70°C. The RS-485 control is completely transparent to the user and software written for half-duplex operation without any modification. ISC-1112-I opto-isolators provide 3000VDC of isolation to protect the host computer from destructive voltage spikes. Therefore, the ISC-1112 series is reliable serial media converter and can satisfy most demand of operating environment.



Connections of Serial Media Converter


## Pin Assignment



RS-232 in DB9 Female

RS-422/485 Terminal Block Pin Assignment										
Interface	RS-485		Reserved	RS-422				Reserved	Power Input	
Pin No.	1	2	3	4	5	6	7	8	9	10
Info	Data+	Data-	N.C.	TX+	TX-	RX+	RX-	N.C.	V+	GND

Dimensions

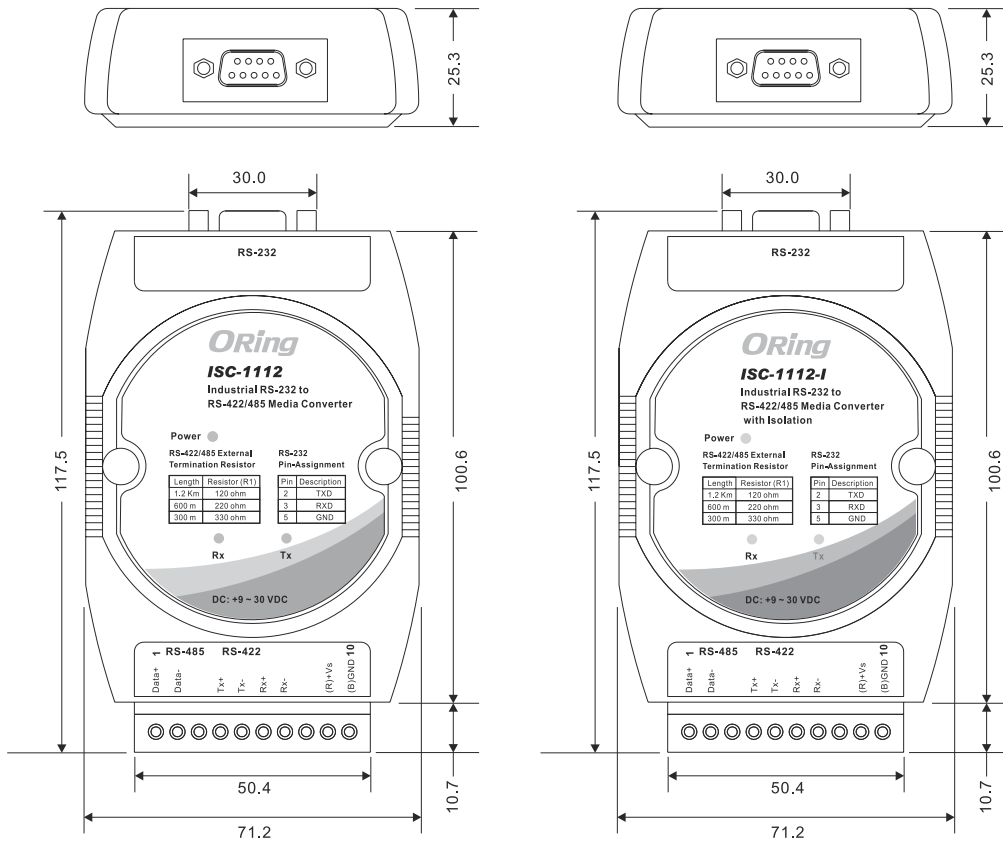

(Unit=mm)

Specifications

ORing Media Converter Model	ISC-1112-I	ISC-1112
<b>Physical Ports</b>		
RS-232 Connector	DB9 (Female)	
RS-422/485 Connector	10-pin terminal block	
RS-232 Signals	TX, RX, GND	
RS-422/485 Signals	RS-422 : TX+, TX-, RX+, RX- RS-485 : Data+, Data-	
Baud Rate	300 to 115.2Kbps	
Data bit	5, 6, 7, 8	
Stop bit	1, 1.5, 2	
Parity	None, Even, Odd, Space, Mark	
Flow Control	XON/XOFF (software) Auto Hardware Direction Control for RS-485	
Serial Isolation	3000VDC	-
<b>LED Indicators</b>		
Power Indicator	Green : Power LED x 1	
TxD Indicator	Green LED x 1	

RxD Indicator	Red LED x 1	
<b>Power</b>		
Input Power	+9 ~ 30 VDC power inputs on 10-pin terminal block	
Power Consumption (Typ.)	2.2 Watts	
<b>Physical Characteristics</b>		
Enclosure	IP-30	
Dimensions (W x D x H)	71.2(W) x 25.3(D) x 100.6(H) mm (2.8x1x3.96 inch.)	
Weight (g)	130g	133g
<b>Environmental</b>		
Storage Temperature	-25 to 85°C (-13 to 185°F)	
Operating Temperature	-10 to 70°C (14 to 158°F)	
Operating Humidity	5% to 95% Non-condensing	
<b>Regulatory Approvals</b>		
EMI	FCC Part 15, CISPR (EN55022) class A	
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11	
Shock	IEC60068-2-27	
Free Fall	IEC60068-2-32	
Vibration	IEC60068-2-6	
Warranty	2 years	

## Ordering Information

ISC-**A****B****C****D****E**-**F**

Code Definition	Serial port Number	Port Type	Converter Prot Number	Converter Type	Other Type	Additional Function
<b>Option</b>	- <b>1</b> : 1port	- <b>1</b> : RS-232 - <b>2</b> : RS-422/485 - <b>3</b> : RS-232/422/485	- <b>1</b> : 1port	- <b>0</b> : other type - <b>1</b> : RS-232 - <b>2</b> : RS-422/485 - <b>3</b> : RS-232/422/485	- <b>F</b> : 100Base-FX Fiber - <b>U</b> : USB	- <b>I</b> : Isolation

	Model Name	Description
Available Model	ISC-1112-I	Industrial 1-port RS-232 to 1-port RS-422/485 serial media converter with 3KV isolation
	ISC-1112	Industrial 1-port RS-232 to 1-port RS-422/485 serial media converter
<b>Packing List</b>	<b>Optional Accessories (Can be purchased separately)</b> <ul style="list-style-type: none"> <li>• ISC-1112/112-I</li> <li>• DIN-Rail Kit</li> <li>• Wall-Mount Kit</li> <li>• Quick Installation Guide</li> <li>• DR-45 series, 45W DIN-Rail power supply</li> <li>• DR-75-12, 12V/75W DIN-Rail power supply</li> <li>• DR-75-24, 24V/75W DIN-Rail power supply</li> <li>• FPC series : Fiber Patch cord</li> </ul>	

Industrial Ethernet Switch

Industrial Media Converter

Industrial Device Server

Industrial Wireless Access Point

Industrial Cellular VPN Router

Accessories

Network Management Utility