

6

5

4





3

2

1

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/8/20	

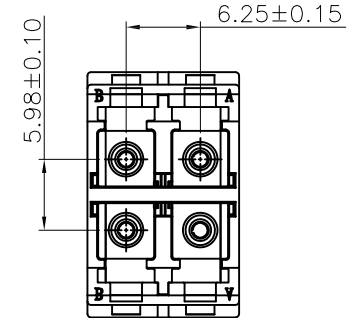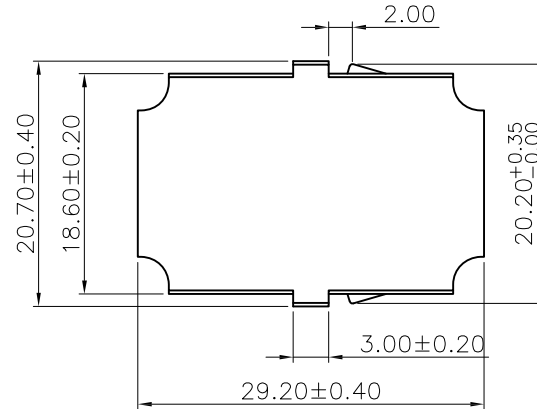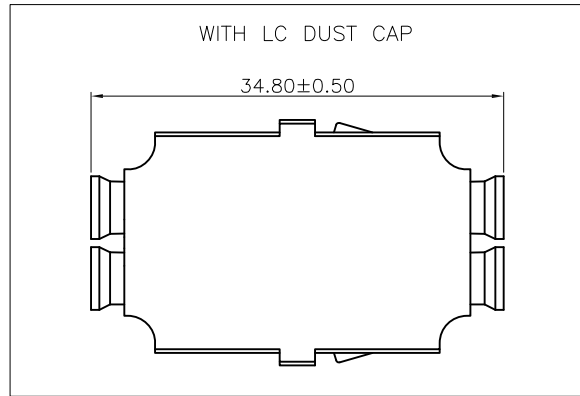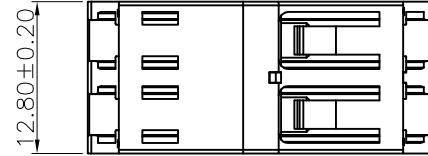

**SPECIFICATIONS:**

Material:  
 Housing: PBT, rated UL 94V-0, Color: Blue  
 Cap: PP, rated UL 94V-0, Color: White  
 Electrical:  
 Standards of IEC 61754-20, YD/T 1272.1-2003  
 Repeatability: 500 min times  
 Insertion loss: 0.2dB max  
 Interchangeability: 0.2dB  
 Temperature Rating:  
 Operating temperature: -40°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		
MM	ANGLE	
X. ± 0.35	X.* ± 2°	
.X ± 0.30	.X* ± 1°	
.XX ± 0.25	.XX* ± 0.5°	
.XXX ± 0.15	.XXX* ± 0.5°	
APPROVALS		DATE
DRAWN	OW	9/8/20
CHECKED	JL	9/8/20
APPROVED		

**ADAM TECH INTERCONNECTS** 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE: OPTICAL LC ADAPTERS, PC, DUAL ROW,  
 2\*2 PORTS, SHORT EARS, WITH LC DUST CAP

SIZE X	PART NO. OPLB4SBNNC1NA	REV. -
REF: S00005C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1