

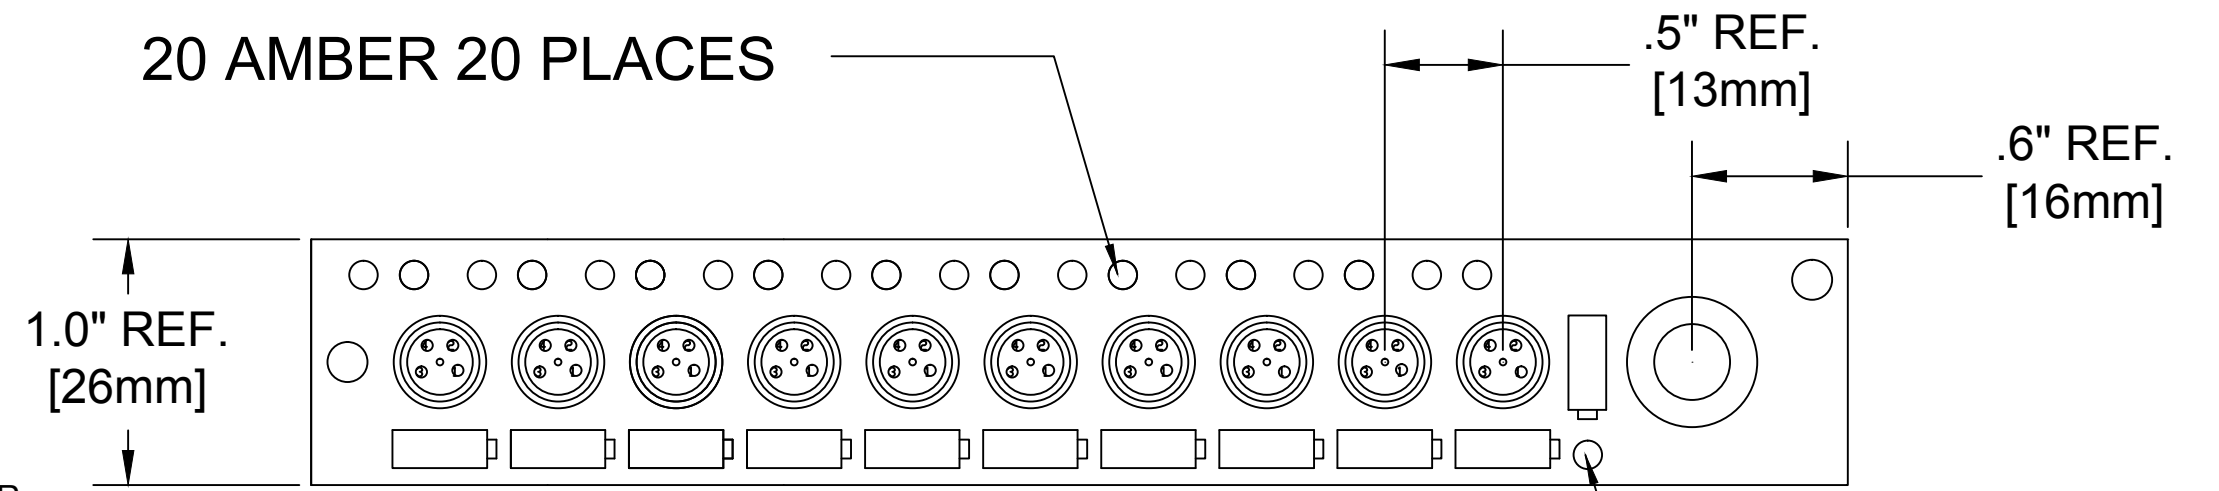


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
1200540046	BNYA03P-FBP-05	5M +165.1mm -0 [16.4FT. +6.5IN -0]

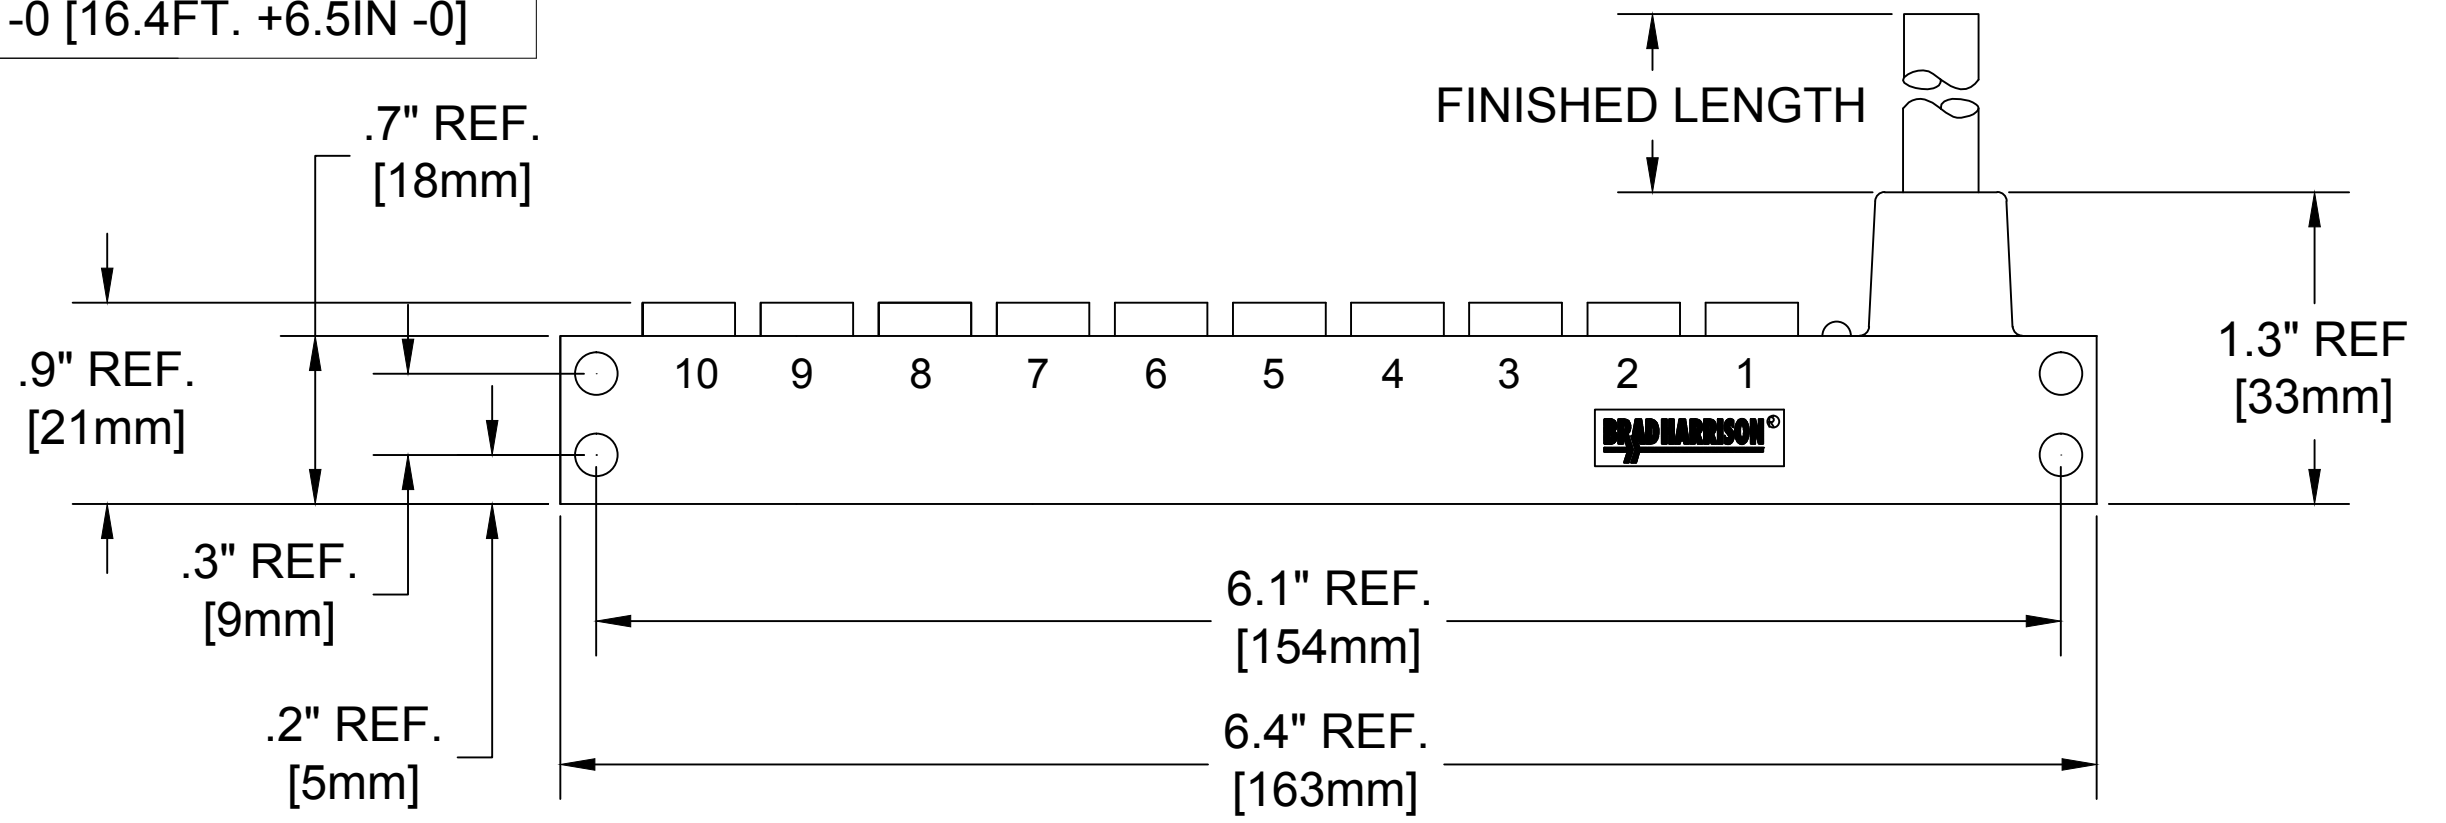

WIRING DIAGRAM

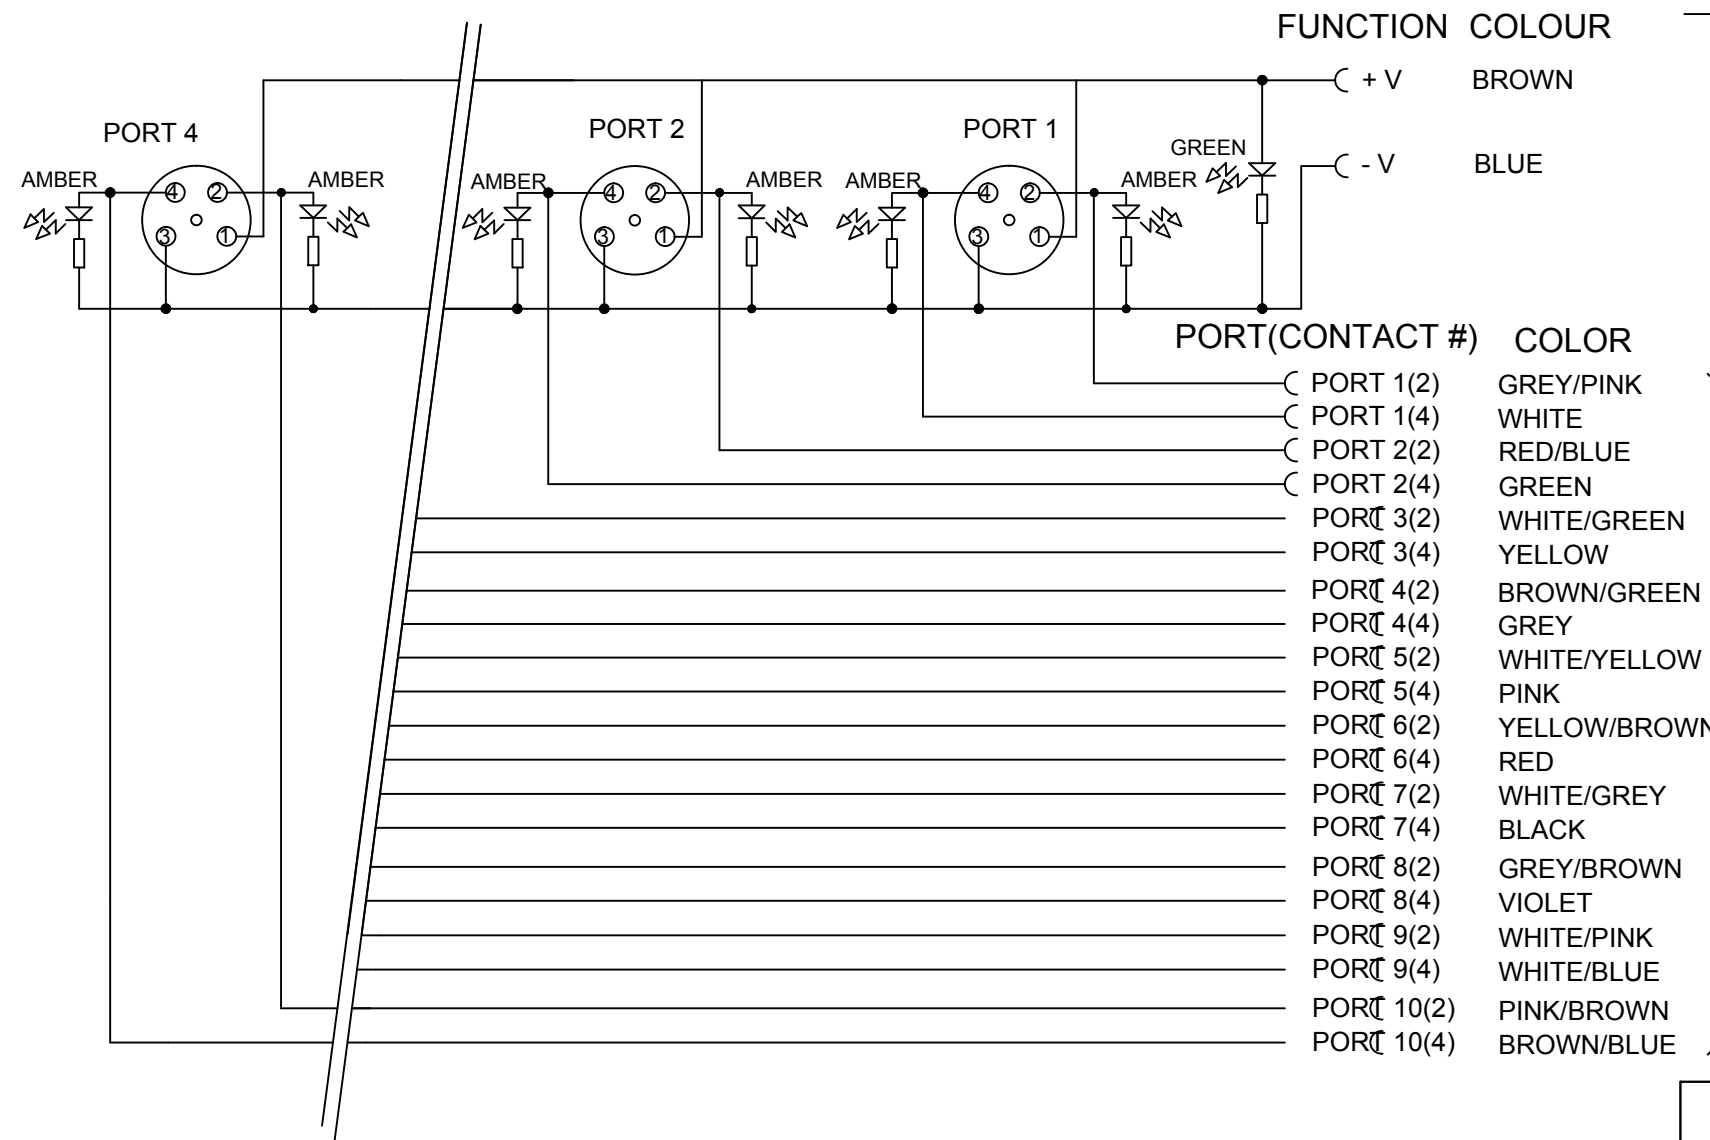

BNYA03P-FBP-05

XX = CABLE LENGTH
 05 = 5 Meters
 10 = 10 Meters

BLACK PUR CABLE

CONTACT:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	PUR, BLACK
HOUSING:	PBT, YELLOW
VOLTAGE RATING:	10 - 30 VDC
AMPERAGE RATING:	4 AMPS
PROTECTION:	IP67
OPERATING TEMPERATURE:	-5°C TO 80°C

EC NO.: ICG2014-0508 DRWN: GGUSTAFS 2013/09/06 CH'KD: VOU APPR: BWOODMAN2013/11/01	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla=0$ $\sphericalangle=0$	mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±0.13 ±.010 1 PLACE ±0.25 ±.020	IN/MM	NTS	INCH	
		ANGULAR ±.5°	DRAWN BY DATE GGUSTAFS 2013/09/06 CHECKED BY DATE VOU 2013/10/10 APPROVED BY DATE BWOODMAN 2013/11/01	TITLE 10 PORT M8 MPIS TOP MOUNT PNP LED 22W BLACK PUR CABLE		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE CHART SIZE C	MOLEX INCORPORATED DOCUMENT NO. SD-120054-007		SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION