


## NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 13.2 Vdc Input 0.9 Vdc - 5.0 Vdc/3 A Output

**bel**  
POWER PRODUCTS

### xRAH-03Exx0 Series RoHS Compliant Rev.A

- Non-Isolated
- Trim Function
- Low Profile Package (7.82 mm)
- UL60950-1 Recognized (UL/cUL)
- Remote On/Off
- OCP/SCP
- Under-Voltage Lockout (UVLO)



### Description

The Bel xRAH-03Exx0 is part of the low cost non-isolated dc/dc converter Power Module series. The modules use a SMD or SIP package for ease of layout and space savings. The output is closely regulated and the efficiency of 3.3 Vdc output module is typically 93% at full load.

### Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
5.0 Vdc	8.0 Vdc - 13.2 Vdc	3 A	15 W	95%	SRAH-03E500	VRAH-03E500
3.3 Vdc	4.5 Vdc - 13.2 Vdc	3 A	9.9 W	93%	SRAH-03E330	VRAH-03E330
2.5 Vdc	4.5 Vdc - 13.2 Vdc	3 A	7.5 W	91%	SRAH-03E250	VRAH-03E250
1.8 Vdc	4.5 Vdc - 13.2 Vdc	3 A	5.4 W	88%	SRAH-03E180	VRAH-03E180
1.5 Vdc	4.5 Vdc - 13.2 Vdc	3 A	4.5 W	87%	SRAH-03E150	VRAH-03E150
1.2 Vdc	4.5 Vdc - 13.2 Vdc	3 A	3.6 W	85%	SRAH-03E120	VRAH-03E120
1.0 Vdc	4.5 Vdc - 13.2 Vdc	3 A	3 W	84%	SRAH-03E100	VRAH-03E100
0.9 Vdc	4.5 Vdc - 13.2 Vdc	3 A	2.7 W	82%	SRAH-03E090	VRAH-03E090

- Notes:** 1. Add "0" suffix at the end of the model number to indicate "Tube Packaging", and "R" for "Reel Packaging", and "G" for "Tray Packaging".  
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

### Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	14 V	
Output Enable Terminal Voltage	-0.3 V	-	13.2 V	
Ambient Temperature	0 °C	-	70 °C	
Storage Temperature	-40 °C	-	100 °C	

### Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	4.5 V	-	13.2 V	Min. input voltage for 5.0 V output module should be 8.0 V
Input Current (no load)	-	30 mA	-	
Input Current (full load)	-	-	3 A	
Remote Off Input Current	-	4 mA	-	
Input Reflected Ripple Current (pk-pk)	-	75 mA	150 mA	With simulated source impedance of 500 nH, 5 Hz to 20 MHz; Use two 270 uF/16 V Oscon capacitors with ESR = 0.018 ohm max. at 100 kHz at 25 °C
Input Reflected Ripple Current (rms)	-	30 mA	60 mA	
I <sup>2</sup> t Inrush Current Transient	-	0.02 A <sup>2</sup> s	0.08 A <sup>2</sup> s	
Turn-on Voltage Threshold	-	4.1 V	4.5 V	Not applicable for 5.0 V output.
Turn-off Voltage Threshold	-	3.3 V	4.0 V	

# NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 13.2 Vdc Input    0.9 Vdc - 5.0 Vdc/3 A Output



## Output Specifications

Parameter	Min	Typ	Max	Notes		
Output Voltage Set Point				Test condition: Vin=8 V, Iout=full load		
Vo=5.0 V	4.900 V	5.0 V	5.100 V			
Vo=3.3 V	3.234 V	3.3 V	3.366 V			
Vo=2.5 V	2.450 V	2.5 V	2.550 V			
Vo=1.8 V	1.764 V	1.8 V	1.836 V			
Vo=1.5 V	1.470 V	1.5 V	1.530 V			
Vo=1.2 V	1.176 V	1.2 V	1.224 V			
Vo=1.0 V	0.980 V	1.0 V	1.020 V			
Vo=0.9 V	0.882 V	0.9 V	0.918 V			
Line Regulation						
Vo=5.0 V	-	10 mV	15 mV			
Vo=3.3 V	-	8 mV	10 mV			
Vo=2.5 V	-	6 mV	10 mV			
Vo=1.8 V	-	6 mV	10 mV			
Vo=1.5 V	-	5 mV	8 mV			
Vo=1.2 V	-	5 mV	8 mV			
Vo=1.0 V	-	5 mV	8 mV			
Vo=0.9 V	-	5 mV	8 mV			
Load Regulation						
Vo=5.0 V	-	15 mV	25 mV			
Vo=3.3 V	-	10 mV	20 mV			
Vo=2.5 V	-	8 mV	15 mV			
Vo=1.8 V	-	8 mV	15 mV			
Vo=1.5 V	-	5 mV	10 mV			
Vo=1.2 V	-	5 mV	10 mV			
Vo=1.0 V	-	5 mV	10 mV			
Vo=0.9 V	-	5 mV	10 mV			
Regulation Over Temperature (0 °C to 70 °C)	-	20 mV	40 mV			
Output Current	0 A	-	3 A			
Current Limit Threshold	3.3 A	-	8 A			
Short Circuit Surge Transient	-	0.02 A <sup>2</sup> s	0.08 A <sup>2</sup> s			
Ripple and Noise (rms)	-	15 mV	40 mV	BW = 0-20 MHz.		
Ripple and Noise (pk-pk)	-	50 mV	100 mV	BW = 0-20 MHz.		
Turn on Time	-	-	60mS			
Overshoot at Turn on	-	0%	3%			
Output Capacitance	0 uF	-	1200 uF			
<b>Transient Response</b>						
50% ~ 100% Max Load	Overshoot	Vo=5 V	-	150 mV	di/dt = 0.5 A/uS; Vin = 8 V; Ta = 25 °C and with a 220 uF Tan. capacitor on output	
	Settling Time		-	60 uS		120 uS
100% ~ 50% Max Load	Overshoot	Vo=3.3 V	-	150 mV		200 mV
	Settling Time		-	60 uS		120 uS
50% ~ 100% Max Load	Overshoot	Vo=3.3 V	-	110 mV		150 mV
	Settling Time		-	60 uS		120 uS
100% ~ 50% Max Load	Overshoot	Vo=3.3 V	-	110 mV		150 mV
	Settling Time		-	60 uS		120 uS
50% ~ 100% Max Load	Overshoot	Vo=2.5 V	-	110 mV		150 mV
	Settling Time		-	60 uS		100 uS
100% ~ 50% Max Load	Overshoot	Vo=2.5 V	-	110 mV		150 mV
	Settling Time		-	60 uS		100 uS

## NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 13.2 Vdc Input 0.9 Vdc - 5.0 Vdc/3 A Output



### Output Specifications (continued)

Parameter		Min	Typ	Max	Notes	
<b>Transient Response</b>						
50% ~ 100% Max Load	Overshoot	Vo=1.8 V	-	110 mV	150 mV	di/dt = 0.5 A/uS; Vin = 8 V; Ta = 25 °C and with a 220 uF electrolytic capacitor on output
	Settling Time		-	60 uS	100 uS	
100% ~ 50% Max Load	Overshoot	Vo=1.8 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	100 uS	
50% ~ 100% Max Load	Overshoot	Vo=1.5 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	120 uS	
100% ~ 50% Max Load	Overshoot	Vo=1.5 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	120 uS	
50% ~ 100% Max Load	Overshoot	Vo=1.2 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	100 uS	
100% ~ 50% Max Load	Overshoot	Vo=1.2 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	100 uS	
50% ~ 100% Max Load	Overshoot	Vo=1.0 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	100 uS	
100% ~ 50% Max Load	Overshoot	Vo=1.0 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	100 uS	
50% ~ 100% Max Load	Overshoot	Vo=0.9 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	100 uS	
100% ~ 50% Max Load	Overshoot	Vo=0.9 V	-	110 mV	150 mV	
	Settling Time		-	60 uS	100 uS	

**Note:** All specifications are typical at 8V input, full load at 25°C unless otherwise stated.

### General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=8 V, full load
Vo=5.0 V	91%	95%	-	
Vo=3.3 V	89%	93%	-	
Vo=2.5 V	87%	91%	-	
Vo=1.8 V	84%	88%	-	
Vo=1.5 V	83%	87%	-	
Vo=1.2 V	81%	85%	-	
Vo=1.0 V	80%	84%	-	
Vo=0.9 V	78%	82%	-	
Switching Frequency <sup>1</sup>	200 kHz	300 kHz	400 kHz	
Output Trim Range	90% Vo	-	110% Vo	For all outputs
<b>Protection Features</b>				
MTBF	8,278,709 hours			Calculated Per Bell Core SR-332 (Io = 80%load; Ta = 25 °C)
Dimensions (surface mount)				
Inches (L x W x H)	0.78 x 0.7 x 0.32			
Millimeters (L x W x H)	19.812 x 17.78 x 8.128			
Dimensions (vertical)				
Inches (L x W x H)	0.7 x 0.308 x 0.65			
Millimeters (L x W x H)	17.78 x 7.82 x 16.51			
Weight	-	5.1 g	-	

**Notes:** All specifications are typical at 25 °C unless otherwise stated.

1. Min. of 0.9 V output should be 100%Vo.

## NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 13.2 Vdc Input 0.9 Vdc - 5.0 Vdc/3 A Output

**bel**  
POWER PRODUCTS

### Control Specifications


Parameter	Min	Typ	Max	Notes
<b>Remote On/Off</b>				
Signal Low (Unit On)	-0.3 V	-	1 V	Remote on/off pin open, unit on.
Signal High (Unit Off)	2.8 V	-	13.2 V	

### Output Trim Equations

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage ( $V_{adj}$ ) and the nominal output voltage of the converter ( $V_{nom}$ ) are shown below. The Trim Down resistor should be connected between the Trim pin and Vout. The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.

$$R_{TrimDown} = \frac{A}{V_{nom} - V_{adj}} - B$$

$$R_{TrimUp} = \frac{C}{V_{adj} - V_{nom}} - D$$

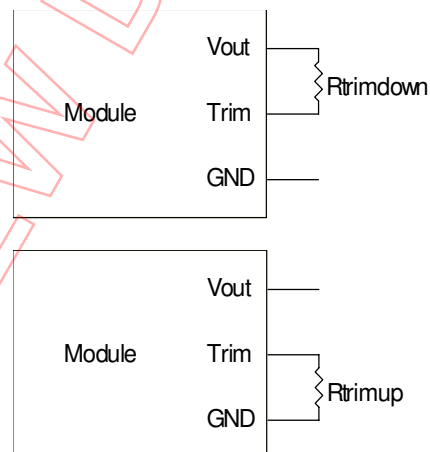







Vnom	A	B	C	D
5.0	61.940	29.400	11.760	14.700
3.3	53.840	61.700	17.200	40.200
2.5	9.596	15.620	4.496	10.000
1.8	3.850	13.830	3.064	10.000
1.5	3.120	14.420	3.536	10.000
1.2	1.790	10.910	3.536	6.490
1.0	0.511	3.490	1.992	1.000
0.9	X	X	0.960	0.100

# NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 13.2 Vdc Input 0.9 Vdc - 5.0 Vdc/3 A Output



## Efficiency Data

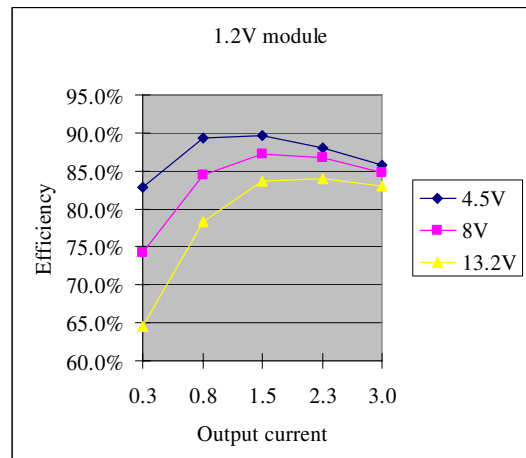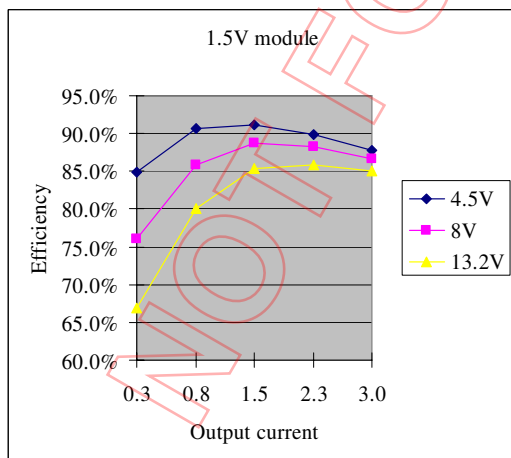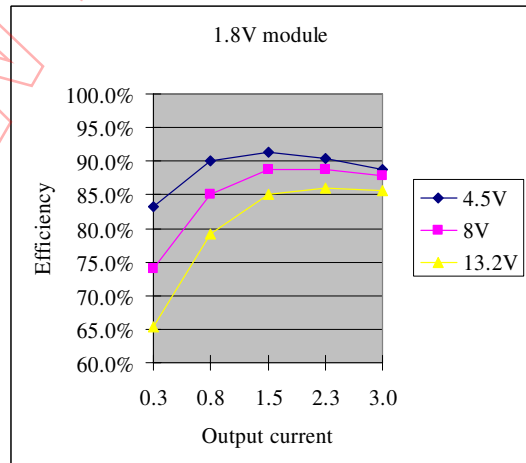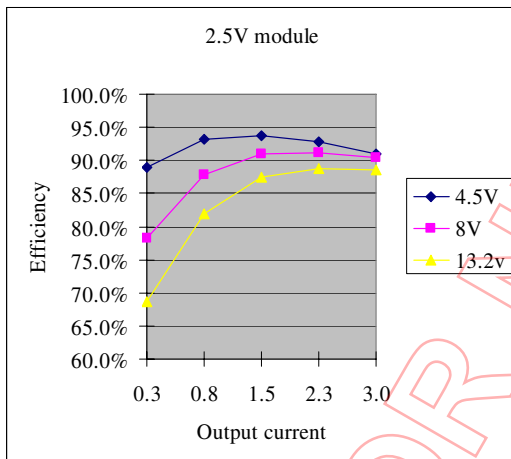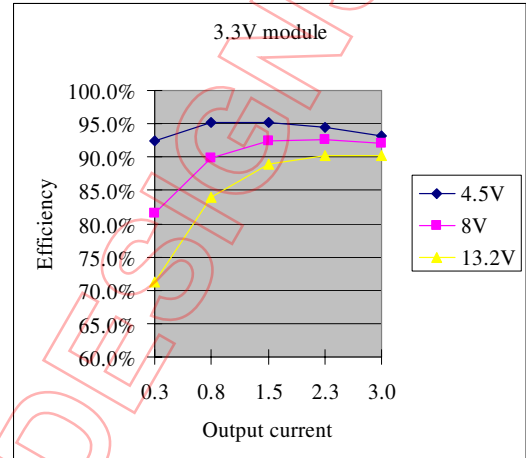
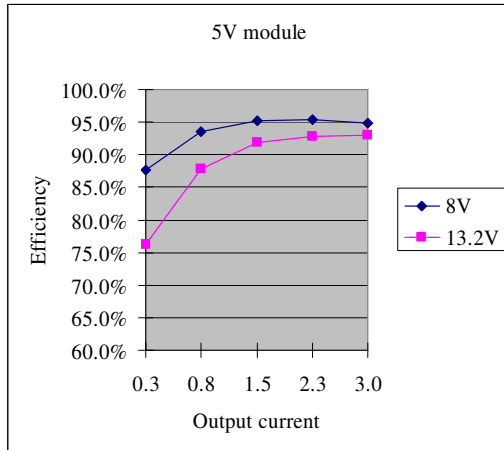


# NON-ISOLATED DC/DC CONVERTERS


4.5 Vdc - 13.2 Vdc Input    0.9 Vdc - 5.0 Vdc/3 A Output



## Efficiency Data (continued)

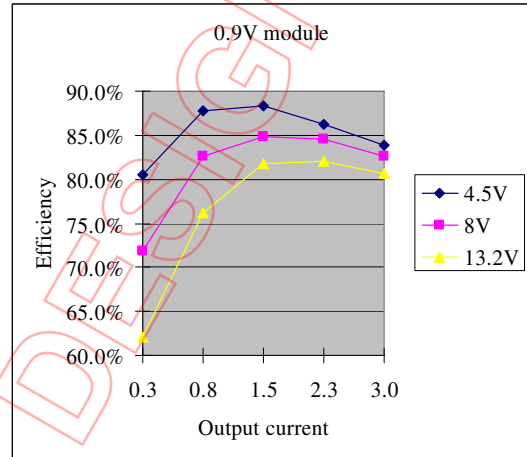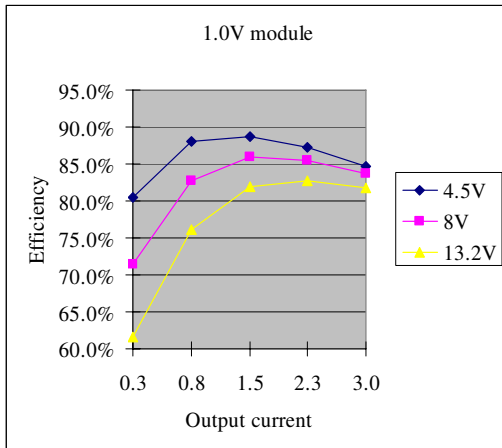

## Thermal Derating Curve

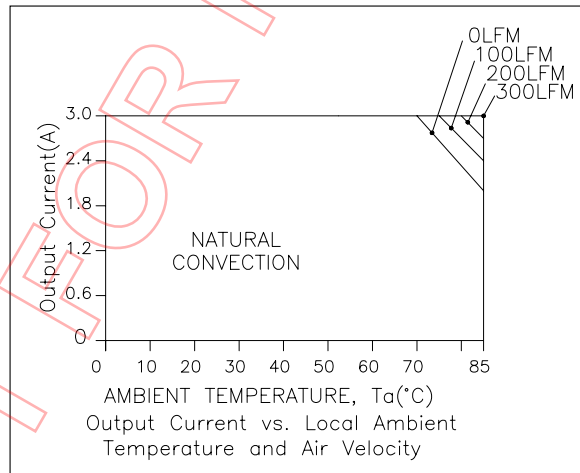


VRAH-03E330


**NON-ISOLATED DC/DC CONVERTERS**  
 4.5 Vdc - 13.2 Vdc Input    0.9 Vdc - 5.0 Vdc/3 A Output




**Ripple and Noise Waveforms**

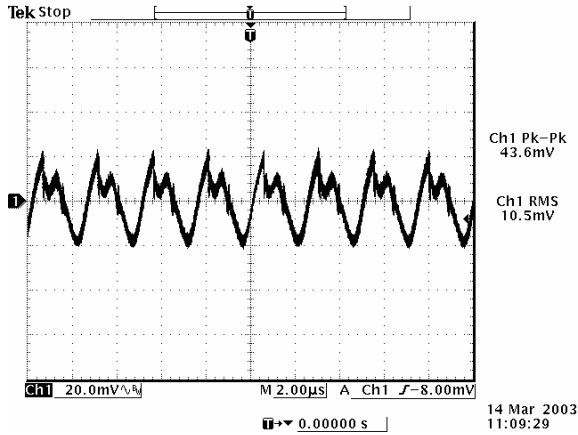


Ripple and noise at max load 5.0 Vdc output

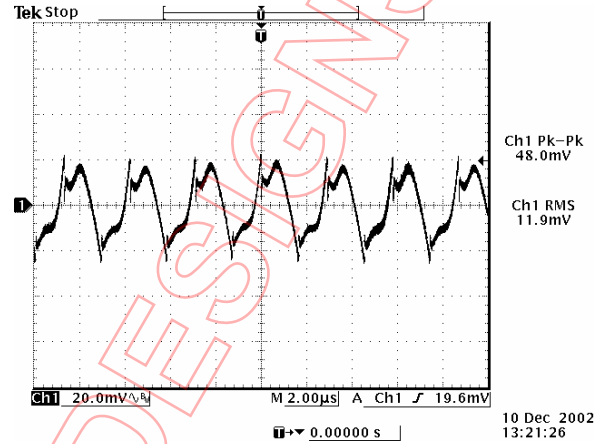


Ripple and noise at max load 3.3 Vdc output

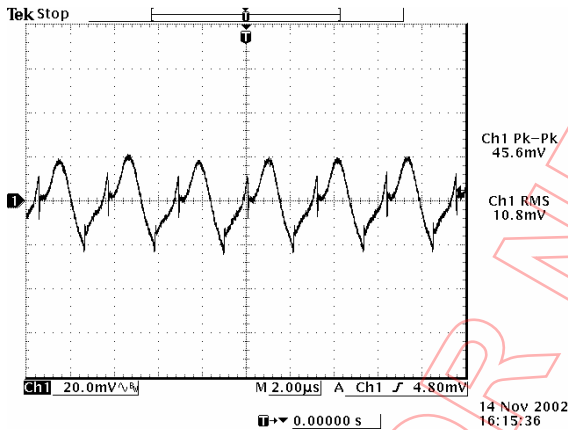


Ripple and noise at max load 2.5 Vdc output

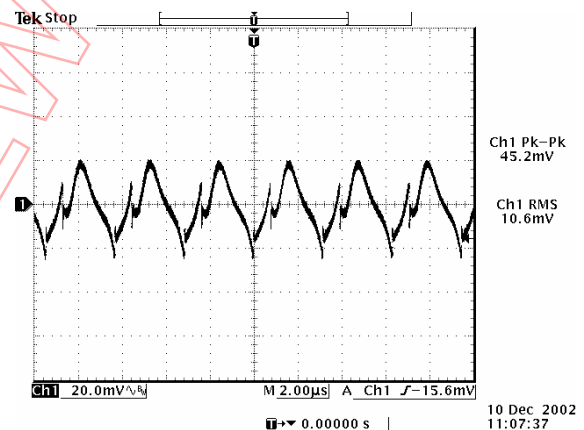

Ripple and noise at max load 1.8 Vdc output

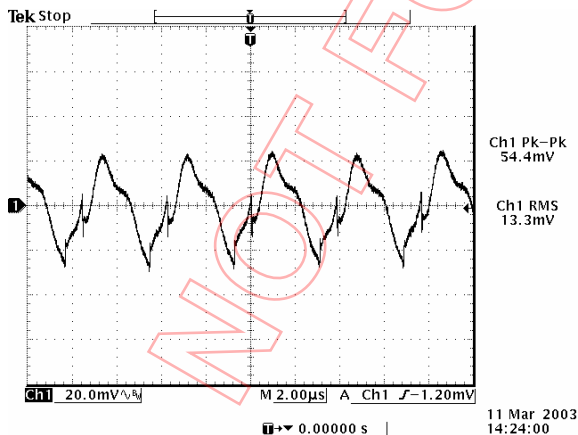

Ripple and noise at max load 1.5 Vdc output

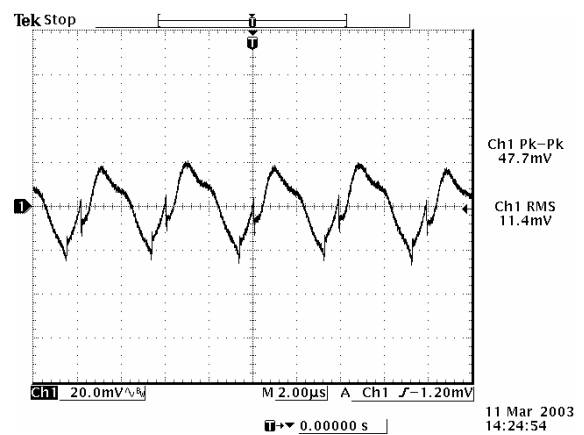


Ripple and noise at max load 1.2 Vdc output

# NON-ISOLATED DC/DC CONVERTERS


4.5 Vdc - 13.2 Vdc Input    0.9 Vdc - 5.0 Vdc/3 A Output



## Ripple and Noise Waveforms (continued)

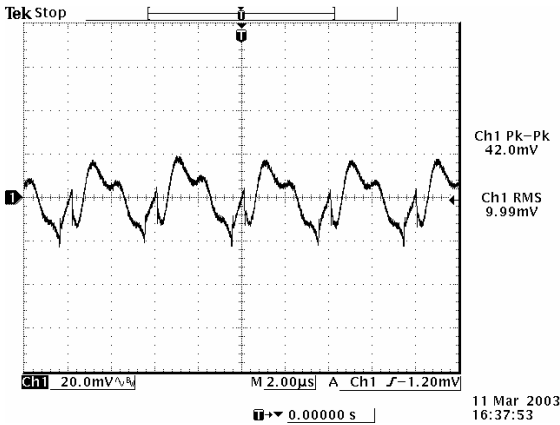


Ripple and noise at max load 1.0 Vdc output

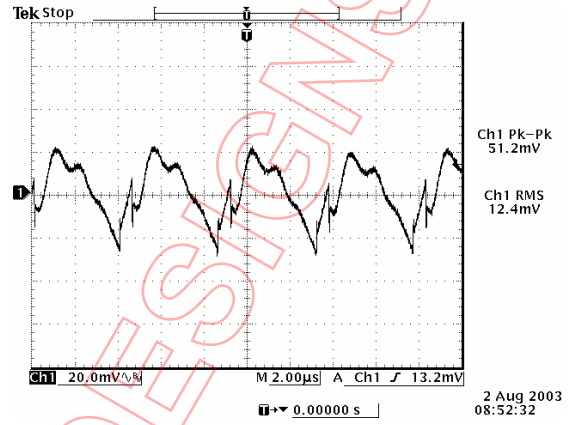


Ripple and noise at max load 0.9 Vdc output

**Note:** Ripple and Noise at 8 Vdc input, Ta=25 deg C.


## Transient Response Waveforms

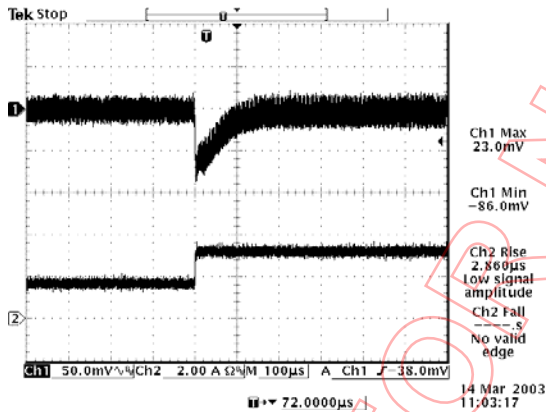


Transients 50% to 100% load 5.0 Vdc output

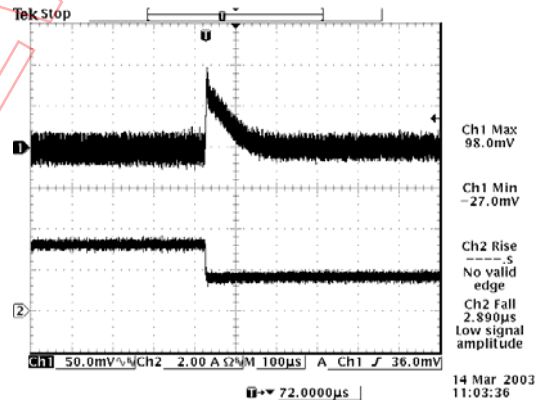

Transients 100% to 50% load 5.0 Vdc output

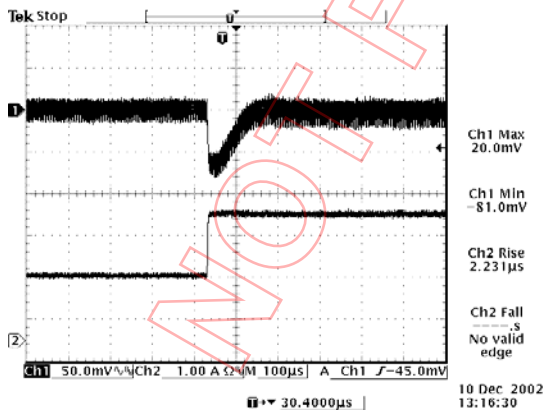

Transients 50% to 100% load 3.3 Vdc output

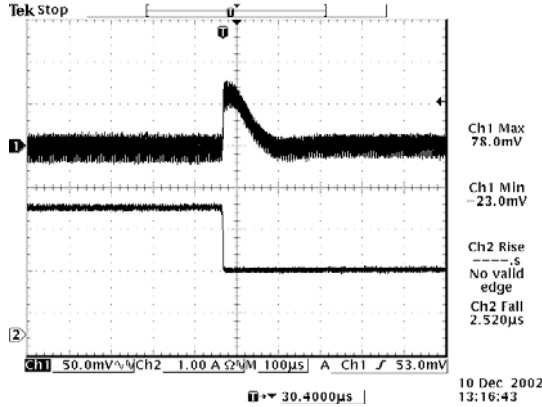

Transients 100% to 50% load 3.3 Vdc output





# NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 13.2 Vdc Input    0.9 Vdc - 5.0 Vdc/3 A Output





## Transient Response Waveforms (continued)

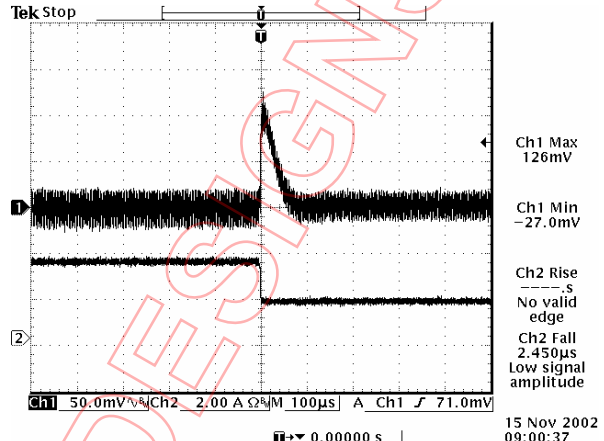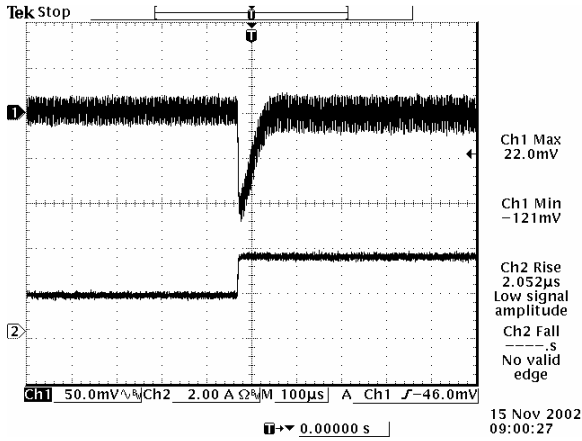



Transients 50% to 100% load 2.5 Vdc output

Transients 100% to 50% load 2.5 Vdc output

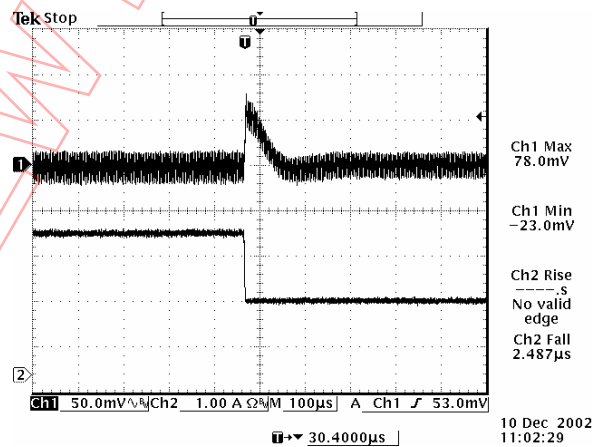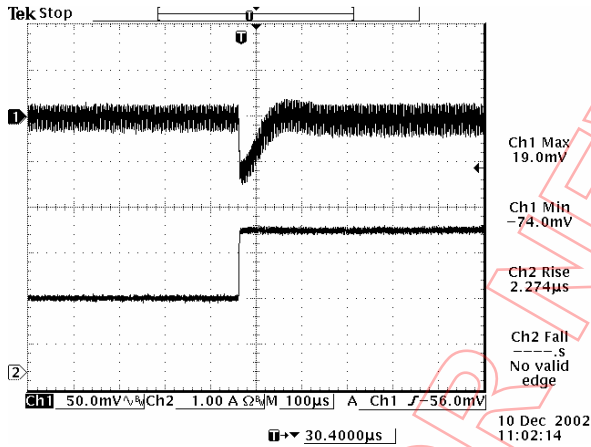

Transients 50% to 100% load 1.8 Vdc output

Transients 100% to 50% load 1.8 Vdc output

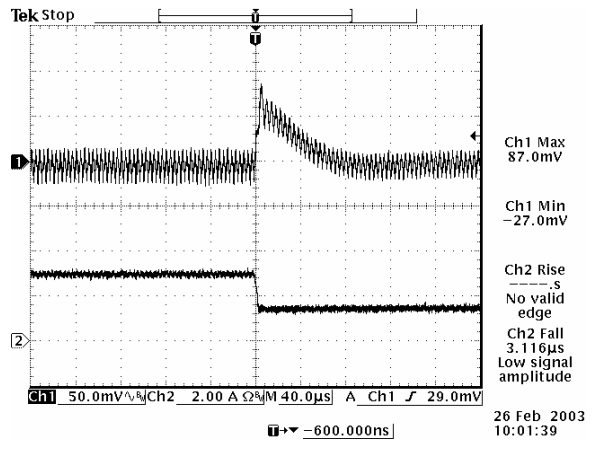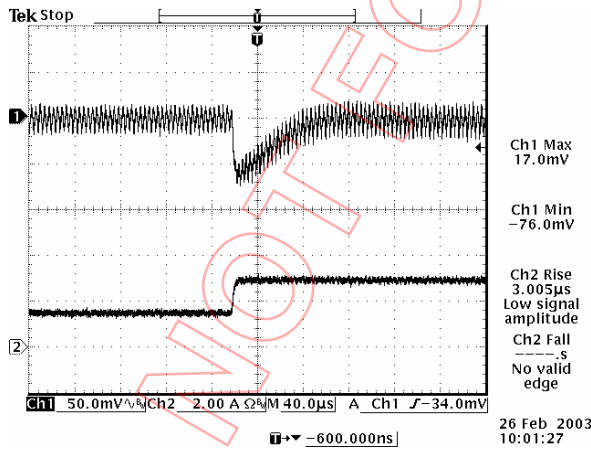

Transients 50% to 100% load 1.5 Vdc output



Transients 100% to 50% load 1.5 Vdc output

# NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 13.2 Vdc Input    0.9 Vdc - 5.0 Vdc/3 A Output





## Transient Response Waveforms (continued)

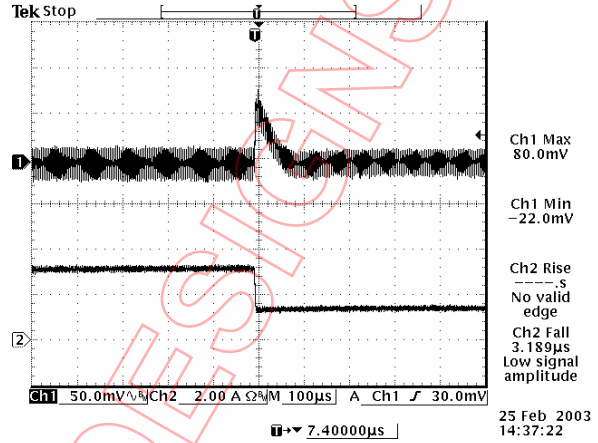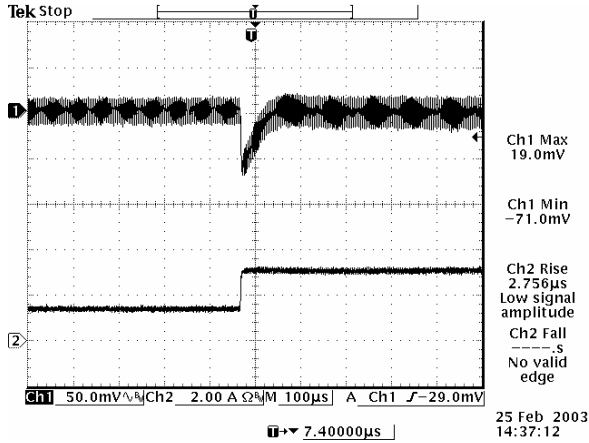



Transients 50% to 100% load 1.2 Vdc output

Transients 100% to 50% load 1.2 Vdc output

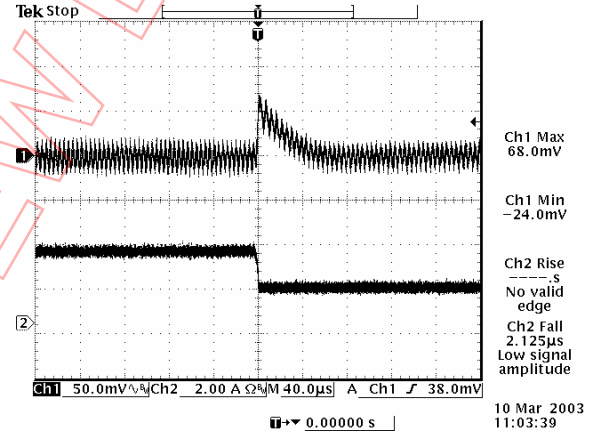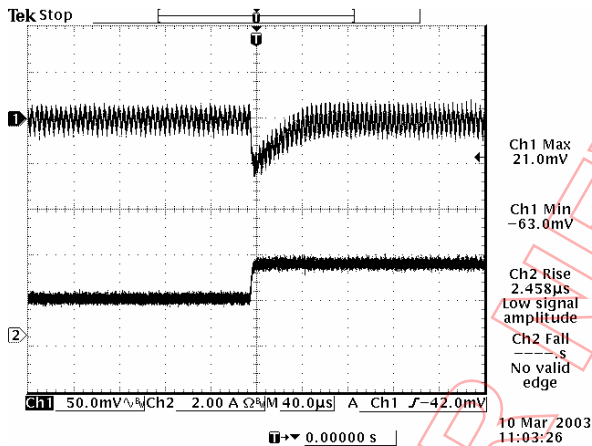

Transients 50% to 100% load 1.0 Vdc output

Transients 100% to 50% load 1.0 Vdc output

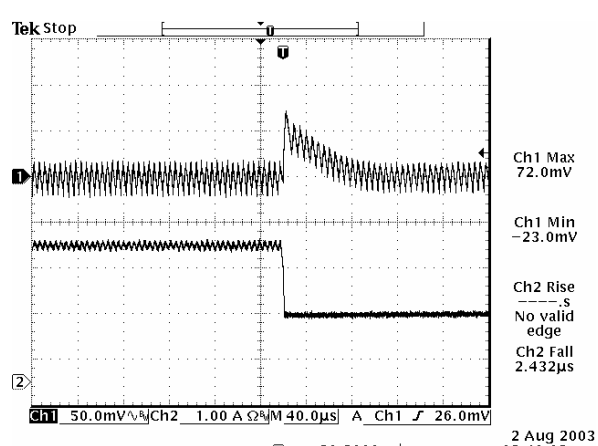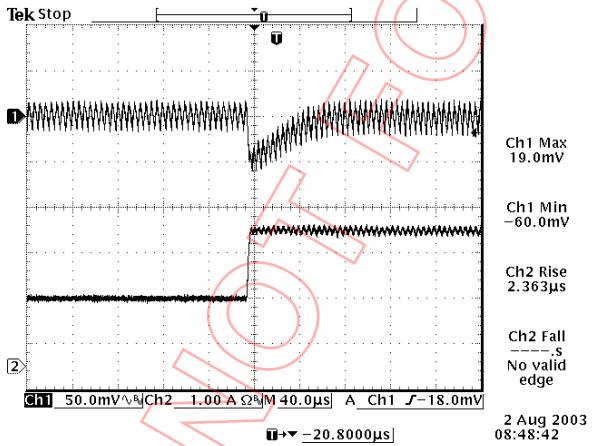

Transients 50% to 100% load 0.9 Vdc output

Transients 100% to 50% load 0.9 Vdc output

**Note:** Transient Response at 8 V input, di/dt=0.5 A/uS, with 220 uF electric cap at the output.


# NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 13.2 Vdc Input    0.9 Vdc - 5.0 Vdc/3 A Output



## Mechanical Outline


### SRAH-03Exx0

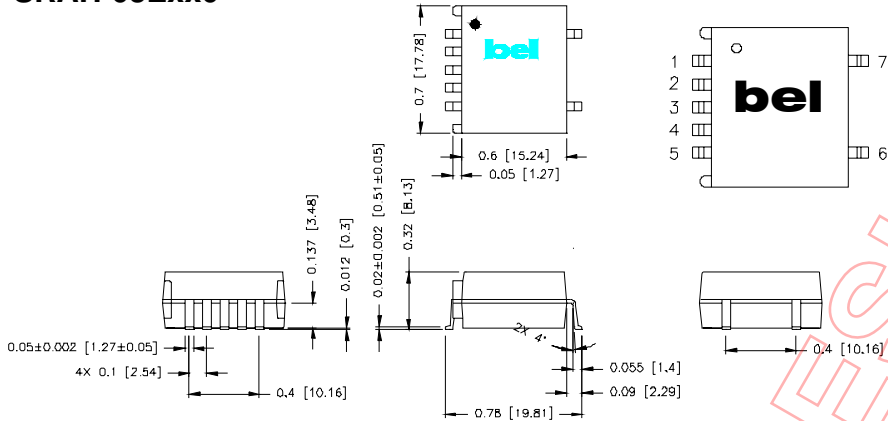

### Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)
6	N/A
7	N/A

### VRAH-03Exx0

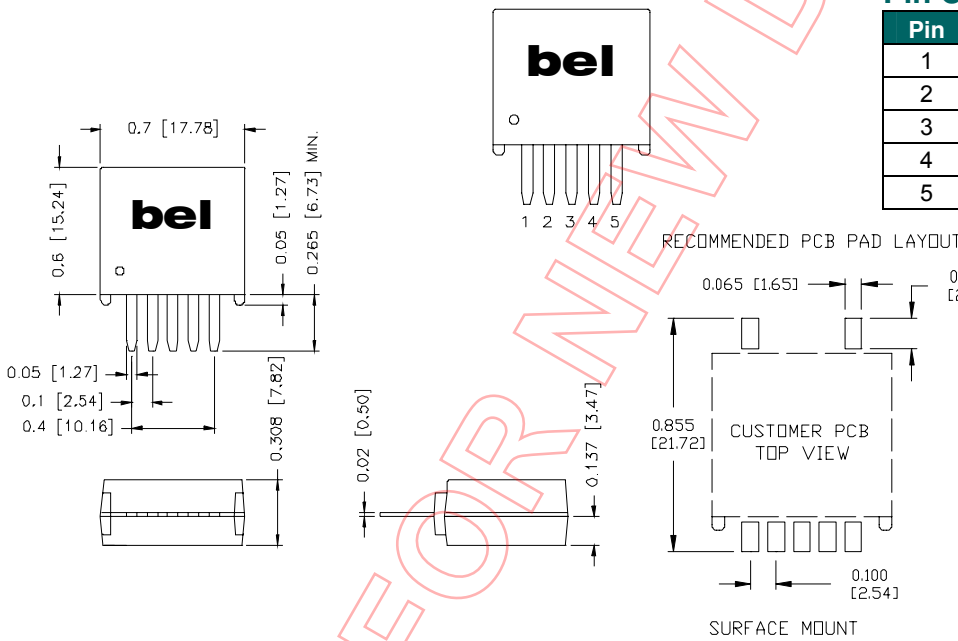

### Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)

## RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240 °C.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 010807

### CORPORATE

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

### FAR EAST

Bel Fuse Ltd.  
8F/ 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

### EUROPE

Bel Fuse Europe Ltd.  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)