



Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 320 Stück
Packaging unit: 320 pcs



Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT




Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm

← Abspulrichtung - Reel off Direction

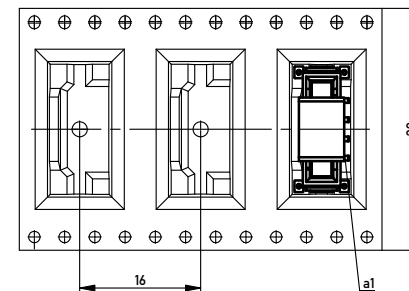

454203		weiß white	0.3	4.5	0.9	3.9	Codierung wie Variante schwarz Encoding such variant black
384465		rot red	3.9	0.9	4.5	0.3	
384464		grün green	2.7	2.1	3.3	1.5	
384463		blau blue	1.5	3.3	2.1	2.7	
384462		schwarz black	0.3	4.5	0.9	3.9	
Ident-Nr. part-no.	Codierung coding	Farbe color	A	B	C	D	Bemerkung note

Information:		Tolerances		Scale	3:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation M 2.54 SRC-P, 4-polig	
d	29.04.2013	ERNI www.ERNI.com		324069	
Index	Date	Class		SRCP	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16949 to be observed