




Power Double Lock

TE Internal #: 177905-6

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp Power Double Lock Plug

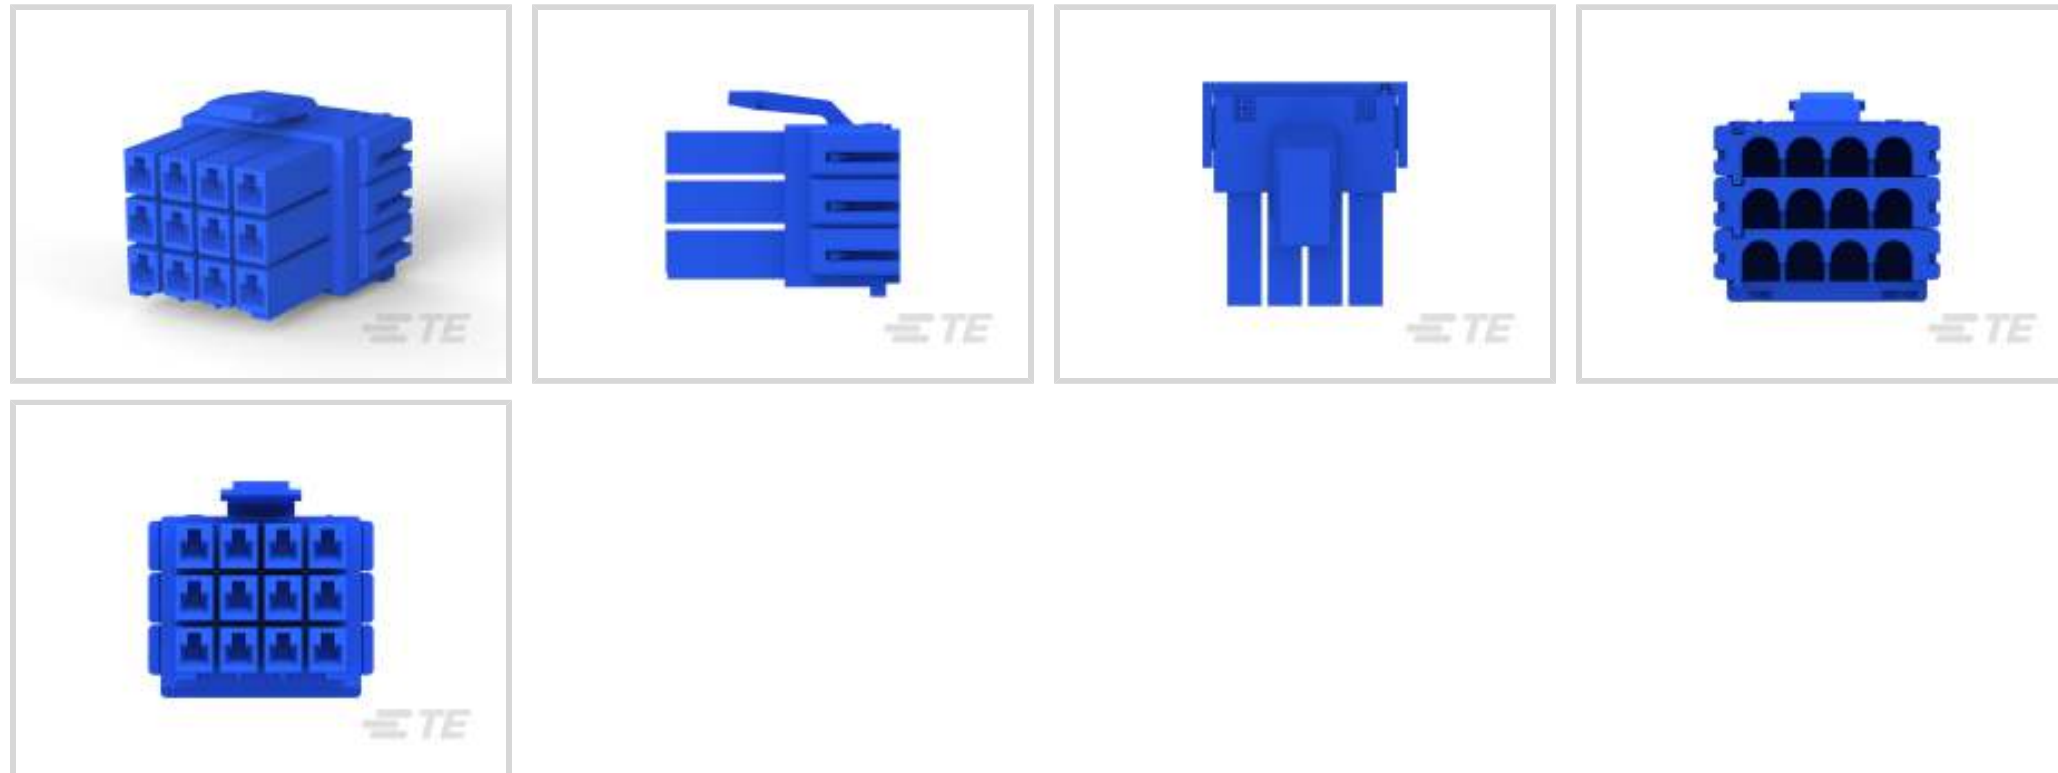

Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Wire**

Number of Positions: **12**

Centerline (Pitch): **3.96 mm [.156 in]**

[All STD Temp Power Double Lock Plug \(67\)](#)

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	12
Number of Power Positions	12
Number of Signal Positions	0
Number of Rows	3

Electrical Characteristics

Operating Voltage	300 VAC
-------------------	---------



Contact Features

Contact Retention Within Housing	Without
Contact Type	Receptacle

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Centerline (Pitch)	3.96 mm [.156 in]
Housing Color	Blue
Housing Material	Nylon 6/6

Dimensions

Row-to-Row Spacing	4.6 mm [.181 in]
--------------------	------------------

Usage Conditions

Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	120
Packaging Method	Bag

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235)



Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # CAT-P87024-R2435
Power Double Lock Receptacle



TE Part # 179593-1
AMP POWER D/LOCK RECCONT. L/P



TE Part # 179592-1
AMP POWER D/LOCK REC CONT. L/P



TE Part # 179592-2
POWER D/LOCK REC CONT. H/P L/P




TE Part # 179593-2
POWER D/LOCK REC CONT. H/P L/P



TE Part # 177913-6
POWER DBL LOCK CAP HSG P/M 12P



TE Part # 179843-6
AMP POWER D/LOCK T/HDR ASY 12P



TE Part # 179855-6
AMP POWER D/LOCK TAB HDR 12P V


Also in the Series | [Power Double Lock](#)



Connector Contacts(1)



Insertion & Extraction Tools(2)

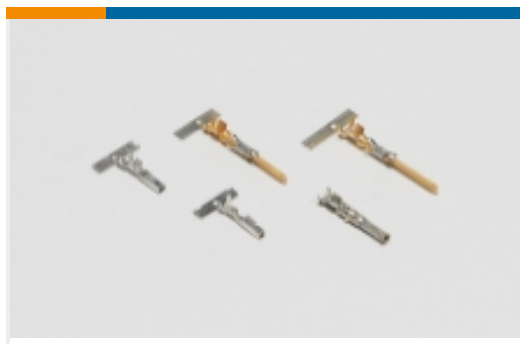

Power Contacts(23)



Rectangular Connector Locking(14)




Rectangular Power Connectors(284)

Customers Also Bought



TE Part #1376444-1
5MM POWER KEY 2P HDR ASSY NUT

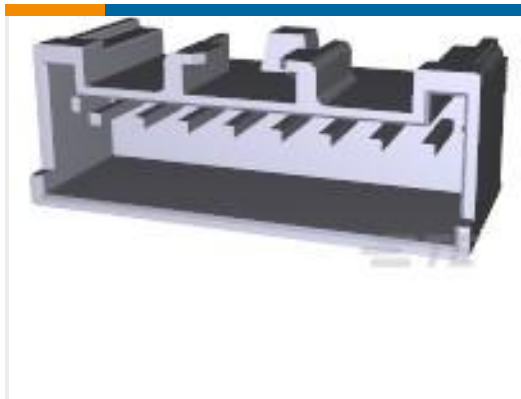

TE Part #917786-6
2.5 S.D.L POST HDR ASSY 8P STD



TE Part #1-1743165-8
PL EX 2P .250 (6.3 MM) FLAG BLUE



TE Part #1-2324579-6
HOUSING, PLUG, 16P, DUAL ROW, EP2.5



TE Part #1746063-2
2.5SDL PLUG HSG 14P RED



TE Part #2-1743068-1
187 HSG. PL MKII REC. 5mm 3P NAT



TE Part #2-2324579-4
HOUSING, PLUG, 24P, DUAL ROW, EP2.5



TE Part #2108744-4
POWER 2P HDR ASSY L/PRO YEL



TE Part #2297529-1
187 P.LOCK MK-II REC FOR 0.8T HIGH TEMP



TE Part #5-170063-3
CLUSTER BLOCK REC W/BACK UP

Documents



Product Drawings

POWER DBL LOCK PLUG HSG 12P

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_177905-6_N.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_177905-6_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_177905-6_N.3d_stp.zip](#)

English

3D PDF

English

Customer View Model

[ENG_CVM_177905-6_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_177905-6_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_177905-6_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

AMP POWER DOUBLELOCK CONNECTOR SERIES

English

Agency Approvals

CSA Certificate

English

177905-6

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock

