

Ratings
 Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor
 Conductor count: 5
 Gauge: 24 AWG 0.22 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 11$
 Resistance at 20 °C: 94.2 Ω /km max



Insulator
 Material: PVC
 Color: black, white, red, yellow, blue
 Diameter: $\varnothing 1.2 \pm 0.10$ mm
 Nominal thickness: 0.28 mm
 Resistance at 20 °C: 10 M Ω /km min

Filler
 Material: cotton rope

Outer jacket
 Material: PVC
 Color: black
 Diameter: $\varnothing 4.9 \pm 0.20$ mm
 Nominal thickness: 0.83 mm

Wire marking: E339579 UL AWM STYLE 2464 24 AWG 80°C
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

Tests
 Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking

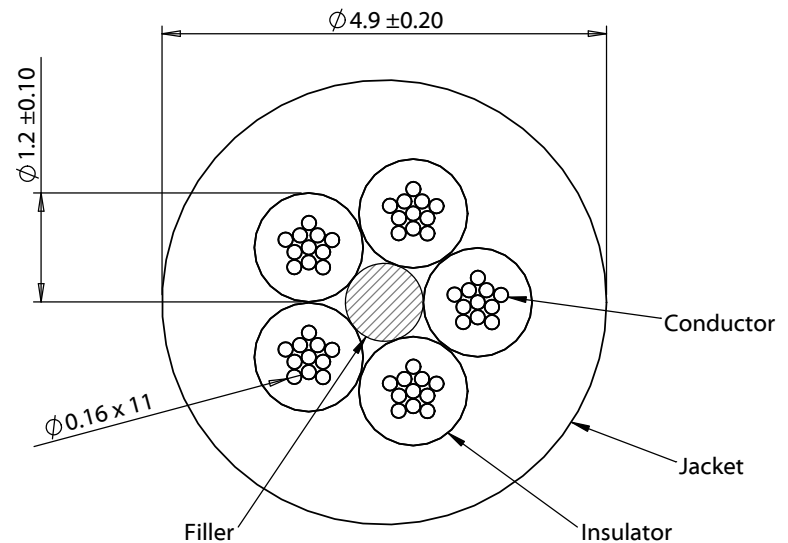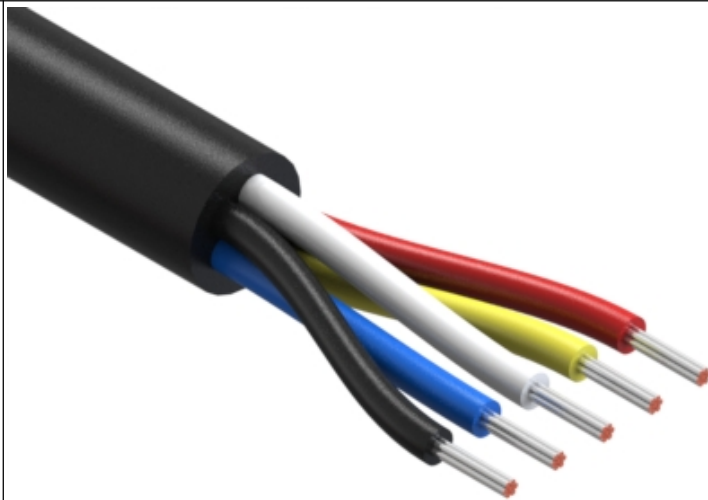

Revision:	Date:	Description:
A	10/14/2015	Initial release
A1	1/22/2016	Updated stranding
A2	09/06/2018	Increased operating temperature range

Prepared: RS
Digitally signed by RS
 Date: 2018.09.06
 14:02:53 -07'00'

Verified: CH
Digitally signed by CH
 Date: 2018.09.06
 15:15:55 -07'00'

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:
 RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:
 Wire, 5C TS, 24 AWG, UL2464, 300V, 80C, 4.9 mm, VW-1, PVC

TENSILITY
 tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size: A Part number: 30-00501

Scale: 1:2 Sheet 1 of 1