



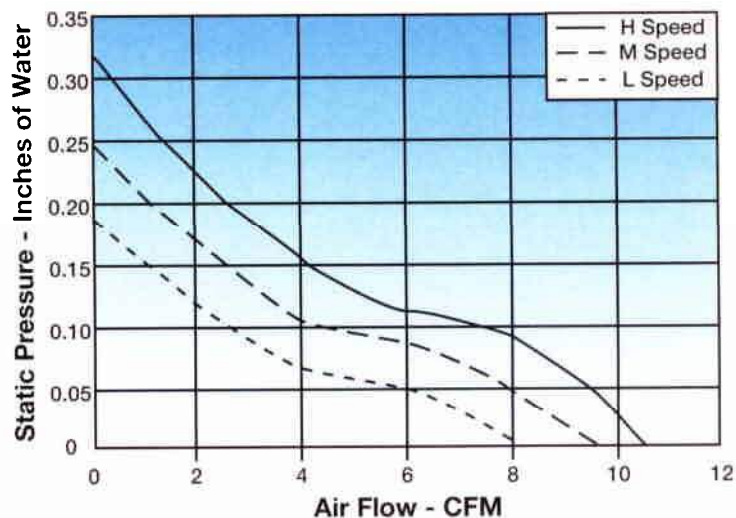

Features:

- Size: 1.57" x .79" wide (40mm x 20mm)
- Air Flow: 7.5-10 CFM
- Noise: 25-31.9 dBA
- Operating Voltage: 5, 12, & 24 vdc
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +75°C
- Weight: .07 lb (34 g)
- Agencies: UL, CUR, TUV, CE
- Ball Bearing Unit: (Sleeve Bearing Available)

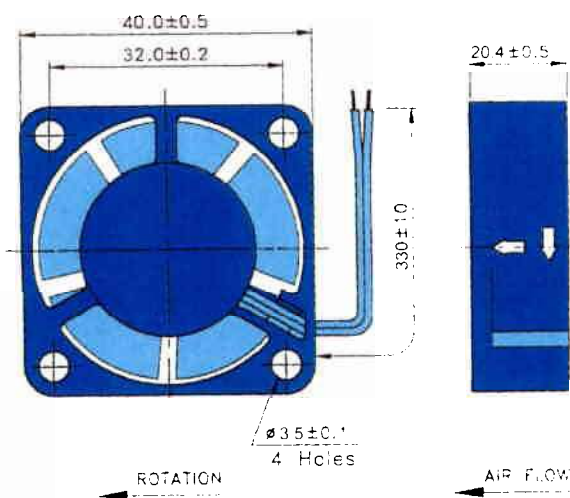

Model No.	Part No.	Voltage Nominal (VDC)	Running Current (amps)	Power (Watts)	RPM	CFM	Static Pressure	Noise (dBA)
CR0405HB-C50	032616	5	.200	1.00	7800	10.0	.256	31.9
CR0405MB-C50	032618	5	.160	.80	6900	8.5	.190	28.5
CR0405LB-C50	032620	5	.140	.70	6000	7.5	.160	25.0
* CR0412HB-C50	032622	12	.100	1.20	7800	10.0	.256	31.9
CR0412MB-C50	032624	12	.080	.96	6900	8.5	.190	28.5
CR0412LB-C50	032626	12	.070	.84	6000	7.5	.160	25.0
*† CR0424HB-C50	032628	24	.090	2.16	7800	10.0	.256	31.9
† CR0424MB-C50	032630	24	.070	1.68	6900	8.5	.190	28.5

* Distributor Item

† Agencies Vary (Consult Factory)

Comair Rotron

2675 Customhouse Court • San Ysidro CA 92173 • Ph (619) 661-6688 Fax (619) 661-1757
 E-mail: sales@comairrotron.com • Web: www.comairrotron.com