

REV. 0

DCO 170403

COIL: @ 25°C
 RESISTANCE _____ 100 OHMS ± 10%
 NOMINAL VOLTAGE _____ 40.0 mADC
 MUST OPERATE _____ 20.0 mADC


 MUST RELEASE _____ 10.0 mADC MAX, 2.0 mADC MIN

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 2000 _____ CPS @ _____ 15 _____ g's
 SHOCK _____ 100 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE TIME 15 MS MAX
 _____ RELEASE TIME 10 MS MAX
 _____ CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

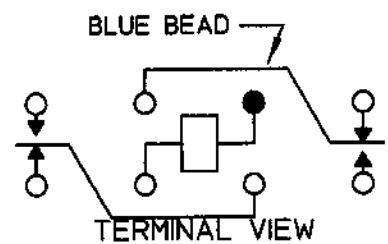

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 2/16/01

CK. TLG 02-16-01

CII Technologies
 advanced control electronic solutions

CUST. _____ QPL
 CUST. NO. M5757/13-084 REV. _____

3SAT RELAY

3SAT1301A2