


# 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Antenna Engineering Specification (WC12H0)

## 1. Explanation of Product Number

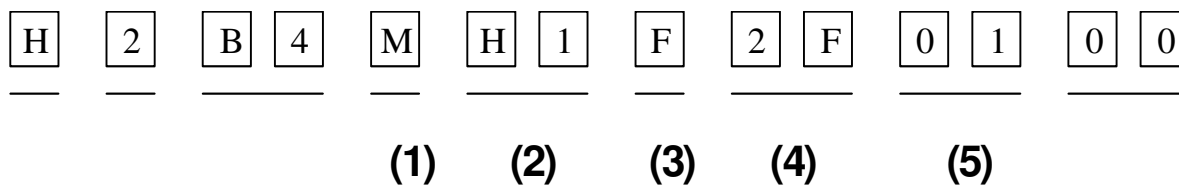

### Product Code

(1) Product Applications:

M : LTE Full Band/ 3G/ 2G

(2) Dimensions:

H1 : 120.0 x 13.0 x 0.5 (mm)

(3) Material:

F : FPCB

(4) Working Frequencies:

2F : 698~960 & 1710~2170 & 2300~2400 & 2490~2690 MHz

(5) Antenna Series:

01 : serial number

IPEX I Cable(φ 1.13 mm),L=100 mm)



**詠業科技股份有限公司**  
Unictron Technologies Corporation  
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **George**

Checked by : **Chinling**

Approved by : **Herbert**

**TITLE** : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate Antenna (WC12H0) Engineering Specification

**DOCUMENT NO.**

**H2B4MH1F2F0100**

**REV.**  
**A**

## 2. Features

- \*Stable and reliable in performances
- \*Compact size
- \*RoHS compliance

## 3. Applications

- \* LTE Full Band/ 3G/ 2G.
- \* LTE / GSM / CDMA /DCS /PCS / WCDMA / UMTS / HSDPA / GPRS / EDGE /IMT.

## 4. Description

Unictron's WC12H0 FPCB antenna is designed for cellular LTE Full bands applications, covering frequencies 698~960 MHz & 1710~2170 MHz & 2300~2400 MHz & 2490~2690 MHz. Fabricated with proprietary design and processes, WC12H0 shows excellent performance and is fully compatible.

## 5. Electrical Specifications

(Antenna is attached on a 2.0mm-thick ABS + PC material plate)

### 5-1. Electrical Table (698~960 MHz Band)

Characteristics		Specifications	Unit
Outline Dimensions		120.0 x 13.0 x 0.5	mm
Working Frequency		698~960	MHz
Characteristics Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@824 MHz)	2.8 (typical)	dBi
Efficiency		62.8 (typical)	%

### 5-2. Electrical Table (1710~2170 MHz Band)

Characteristics		Specifications	Unit
Working Frequency		1710~2170	MHz
Characteristics Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@1950 MHz)	3.0 (typical)	dBi
Efficiency		67.6 (typical)	%



詠業科技股份有限公司  
Unictron Technologies Corporation  
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : George

Checked by : Chinling

Approved by : Herbert

TITLE : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate Antenna (WC12H0) Engineering Specification

DOCUMENT NO.

H2B4MH1F2F0100

REV.  
A

### 5-3. Electrical Table (2300~2400 MHz Band)


Characteristics		Specifications	Unit
Working Frequency		2300~2400	MHz
Characteristics Impedance		50	$\Omega$
Polarization		Linear Polarization	
Peak Gain	(@2350 MHz)	2.6 (typical)	dBi
Efficiency		65.3 (typical)	%

### 5-4. Electrical Table (2490~2690 MHz Band)


Characteristics		Specifications	Unit
Working Frequency		2490~2690	MHz
Characteristics Impedance		50	$\Omega$
Polarization		Linear Polarization	
Peak Gain	(@2590 MHz)	1.2 (typical)	dBi
Efficiency		51.0 (typical)	%

### 5-5. Return Loss & VSWR

Return Loss

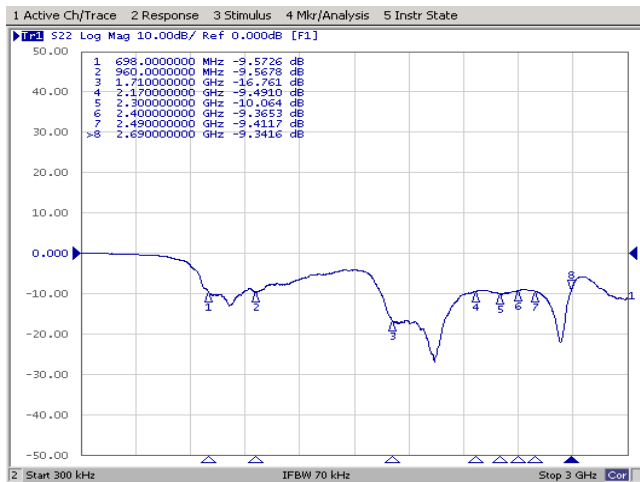

VSWR

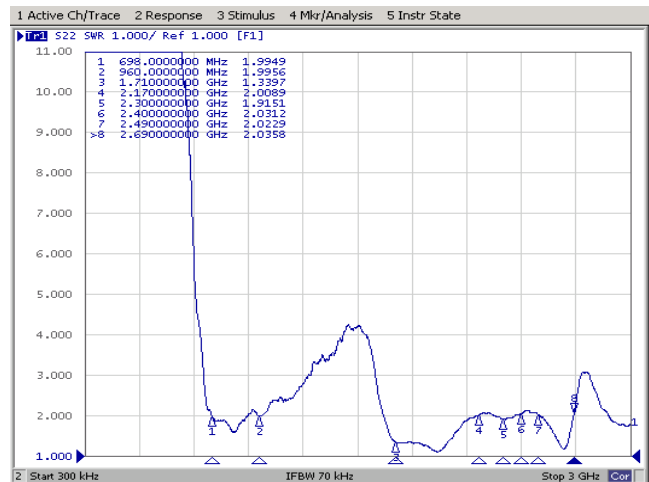

Unictron  
Technologies Corp.  
**2017-09-15**  
Document  
Control Center



**詠業科技股份有限公司**  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **George**

Checked by : **Chinling**

Approved by : **Herbert**


**TITLE** : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate  
Antenna (WC12H0) Engineering Specification

**DOCUMENT NO.**

**H2B4MH1F2F0100**

**REV.**  
**A**


## 6. Antenna Dimensions (unit: mm)

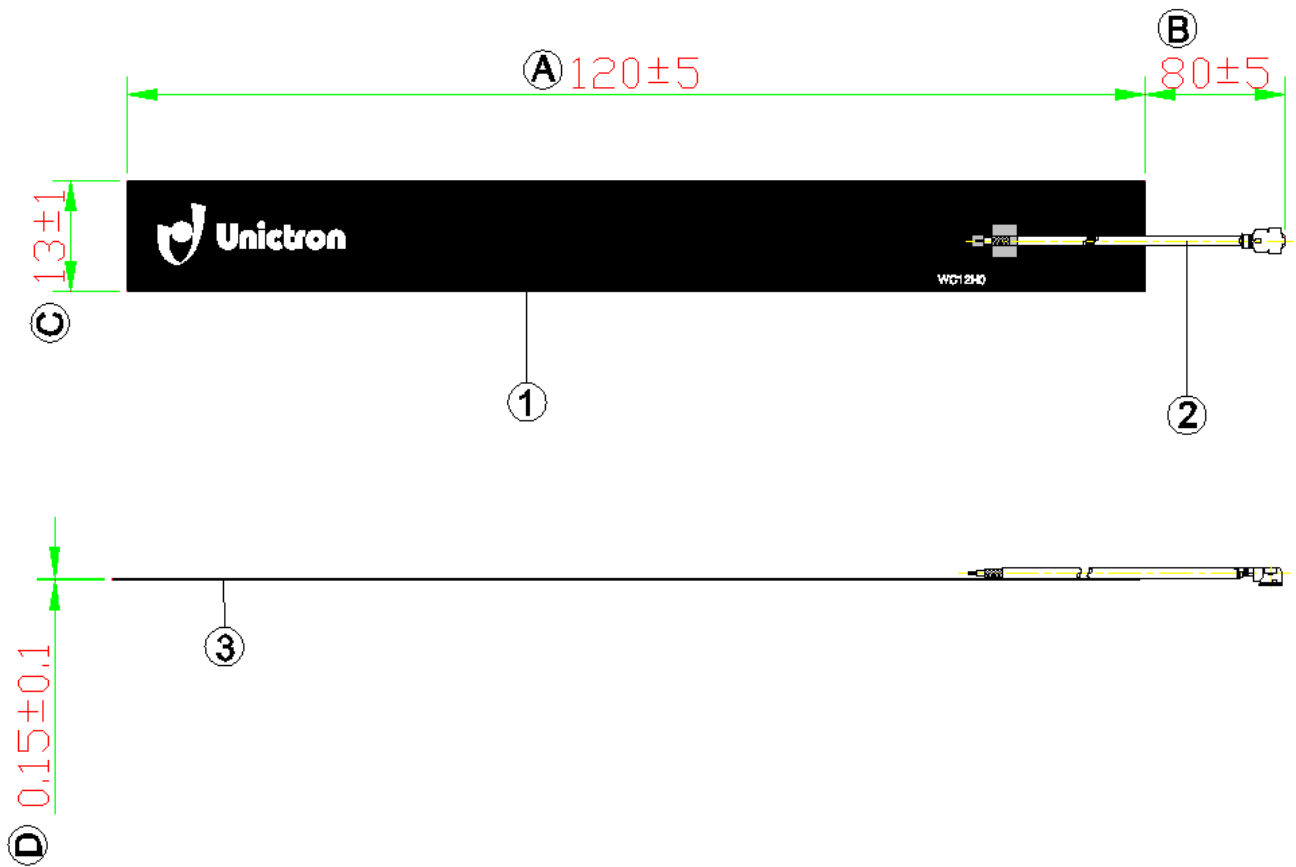

### NOTE:

1. All materials are RoHS compliant.
2. "A~D" Critical Dimensions.
3. "( )" Reference Dimensions.

Item	Name	Material	Color	Q'ty
1	WC12H0_FPCB	FPC	Black	1
2	IPEX Connector(MHF I)_Cable1.13mm	FEP	Gray	1
3	Adhesive			1



詠業科技股份有限公司  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : George

Checked by : Chinling

Approved by : Herbert

TITLE : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate  
Antenna (WC12H0) Engineering Specification

DOCUMENT  
NO.





H2B4MH1F2F0100

REV.  
A

## 7. Radiation Pattern

7-1. 698~960 MHz Band

7-1-1. 3D Gain Pattern @ 824 MHz (unit: dBi)

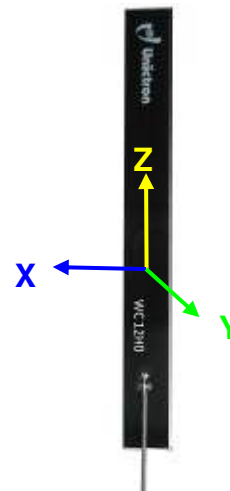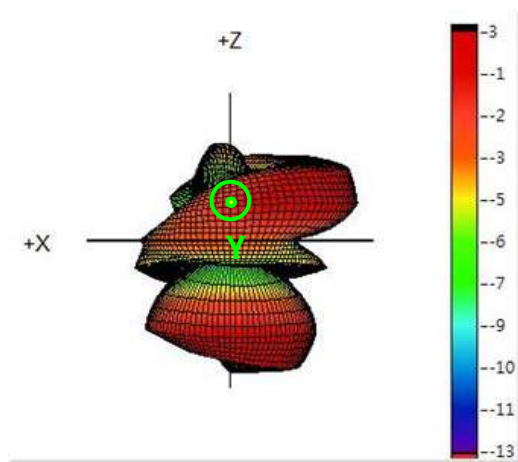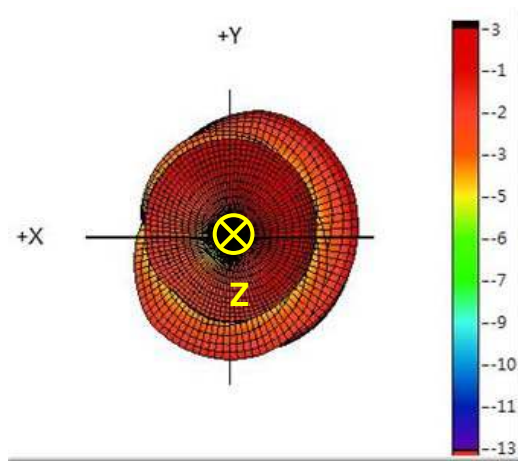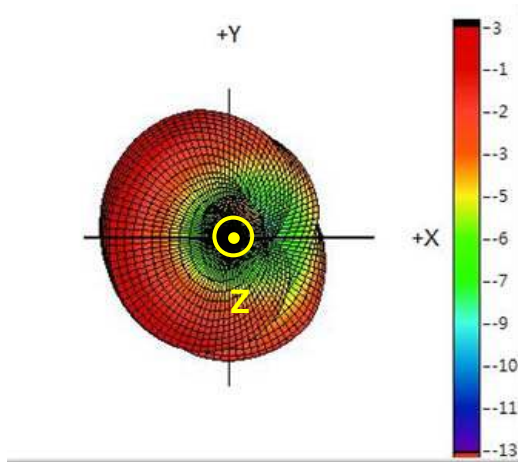

Unictron  
Technologies Corp.  
2017-09-15  
Document  
Control Center



詠業科技股份有限公司  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : George

Checked by : Chinling

Approved by : Herbert

TITLE : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate  
Antenna (WC12H0) Engineering Specification

DOCUMENT  
NO.


H2B4MH1F2F0100

REV.  
A

### 7-1-2. 3D Efficiency Table

Frequency(MHz)	698	720	740	760	780	800	824	840	860	880	900	920	940	960
Efficiency Total (dB)	-2.5	-2.5	-2.2	-2.1	-2.1	-2.3	-2.0	-3.2	-2.9	-2.7	-2.8	-2.8	-1.9	-2.9
Efficiency Total (%)	55.6	56.6	60.2	61.5	62.1	58.6	62.8	47.8	51.5	53.8	52.9	53.0	63.9	51.1
Peak Gain (dBi)	1.8	1.5	1.1	1.6	1.7	1.5	2.8	1.1	0.8	1.5	1.3	1.6	2.6	2.4

### 7-1-3. 3D Efficiency vs. Frequency

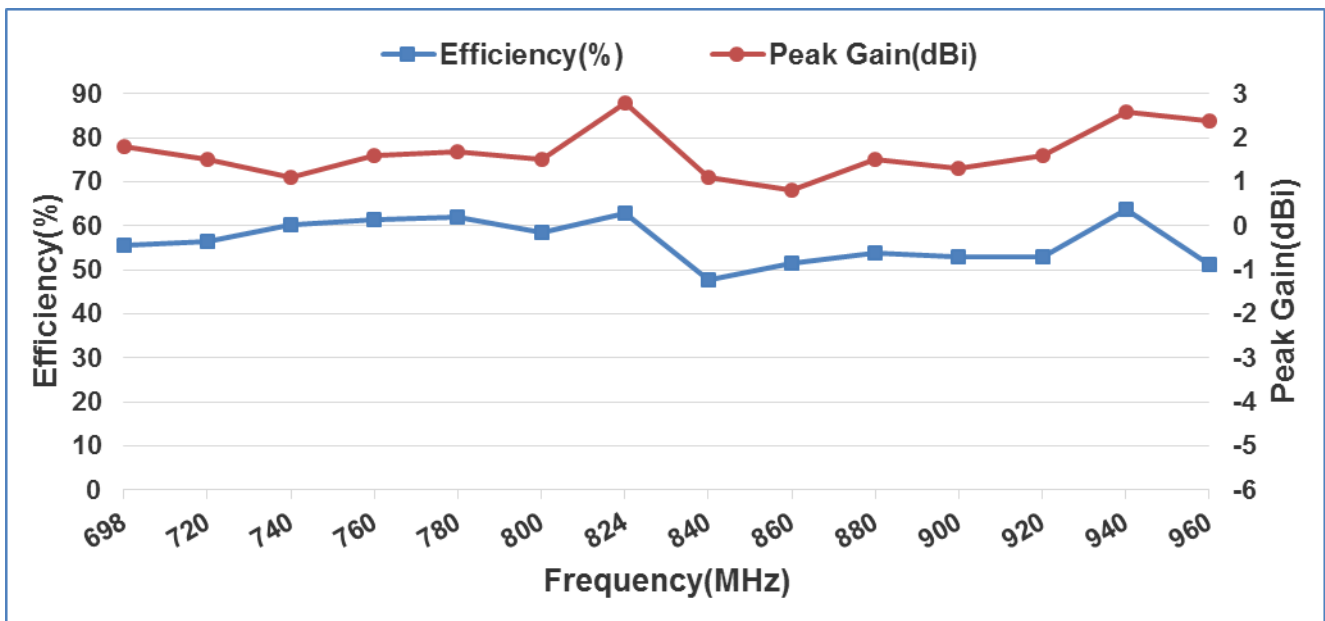

Unictron  
Technologies Corp.  
**2017-09-15**  
Document  
Control Center



**詠業科技股份有限公司**  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **George**

Checked by : **Chinling**

Approved by : **Herbert**

**TITLE** : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate Antenna (WC12H0) Engineering Specification





**DOCUMENT NO.**

**H2B4MH1F2F0100**

**REV.**  
**A**

## 7-2. 1710~2170 MHz Band

### 7-2-1. 3D Gain Pattern @ 1950 MHz (unit: dBi)

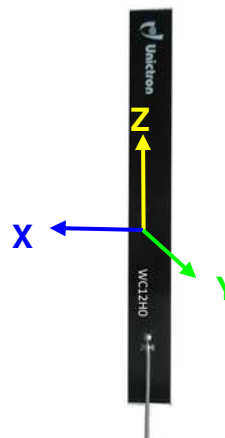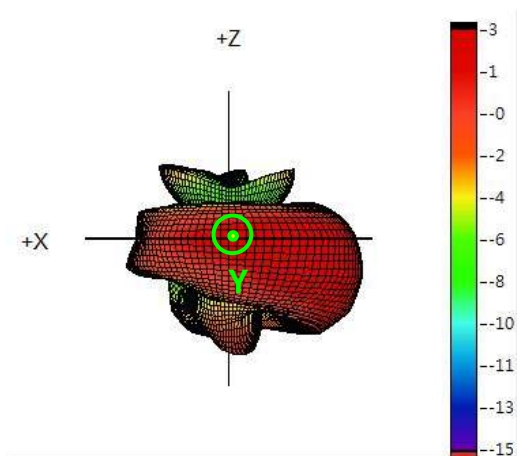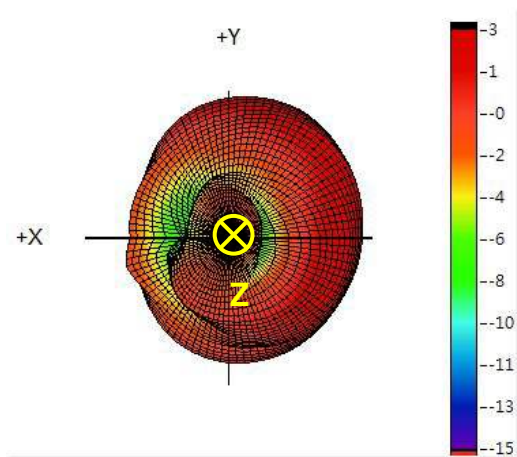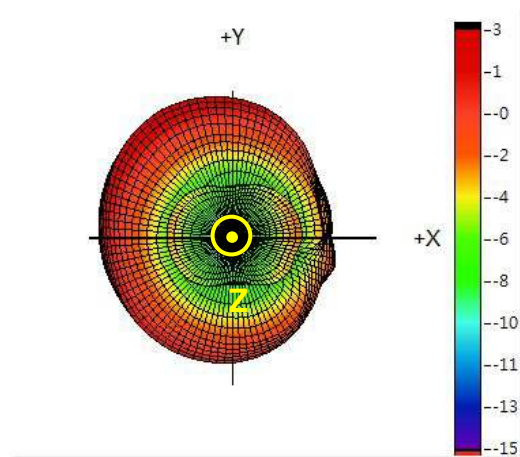

Unictron  
Technologies Corp.  
2017-09-15  
Document  
Control Center



詠業科技股份有限公司  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : George

Checked by : Chinling

Approved by : Herbert

TITLE : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate  
Antenna (WC12H0) Engineering Specification

DOCUMENT  
NO.


H2B4MH1F2F0100

REV.  
A

### 7-2-2. 3D Efficiency Table

Frequency(MHz)	1710	1740	1770	1800	1830	1860	1890	1910	1950	1970	2000	2030	2060	2090	2140	2170
Efficiency Total (dB)	-3.0	-2.2	-1.9	-1.7	-1.5	-1.3	-1.2	-1.7	-1.7	-1.8	-1.6	-2.2	-2.4	-1.9	-1.6	-2.0
Efficiency Total (%)	50.0	60.0	64.8	67.6	71.3	74.5	75.7	67.5	67.6	66.0	68.7	60.8	57.6	64.5	68.5	62.9
Peak Gain (dBi)	2.4	3.5	3.4	3.6	4.0	3.6	2.9	3.1	3.0	2.3	3.1	3.5	2.9	2.6	1.8	1.4

### 7-2-3. 3D Efficiency vs. Frequency

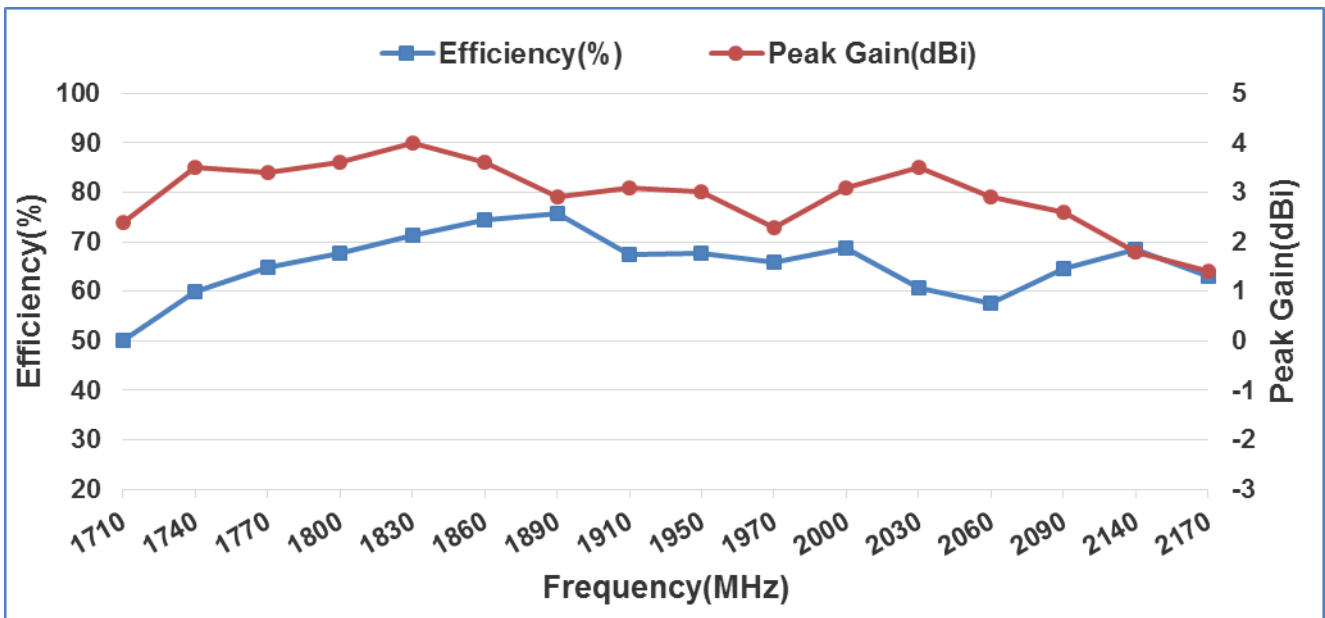

Unictron  
Technologies Corp.  
**2017-09-15**  
Document  
Control Center



**詠業科技股份有限公司**  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **George**

Checked by : **Chinling**

Approved by : **Herbert**

**TITLE** : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate  
Antenna (WC12H0) Engineering Specification

**DOCUMENT NO.**





**H2B4MH1F2F0100**

**REV.**  
**A**



### 7-3. 2300~2400 MHz Band

#### 7-3-1. 3D Gain Pattern @ 2350 MHz (unit: dBi)

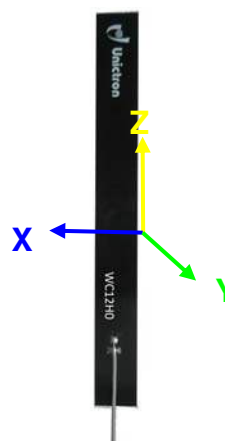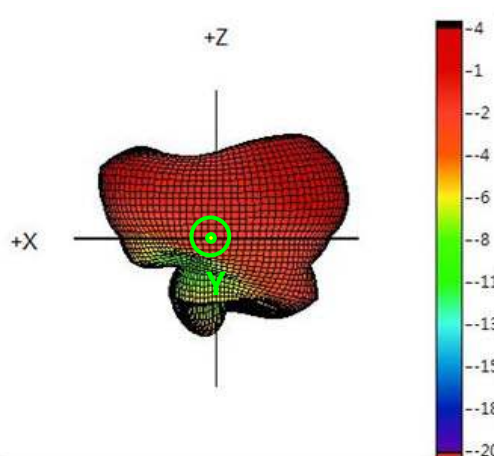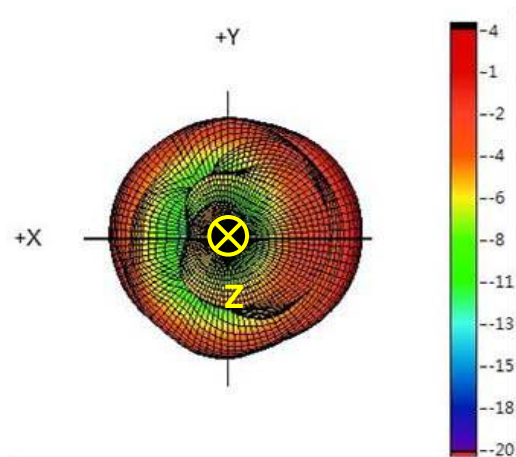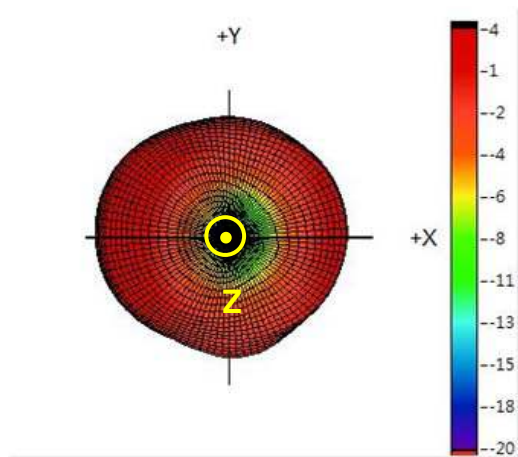

Unictron  
Technologies Corp.  
2017-09-15  
Document  
Control Center



詠業科技股份有限公司  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : George

Checked by : Chinling

Approved by : Herbert

TITLE : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate  
Antenna (WC12H0) Engineering Specification

DOCUMENT  
NO.


H2B4MH1F2F0100

REV.  
A

### 7-3-2. 3D Efficiency Table

Frequency(MHz)	2300	2310	2320	2330	2340	2350	2360	2370	2380	2390	2400
Efficiency Total (dB)	-2.3	-2.2	-2.2	-2.2	-1.9	-1.9	-1.9	-2.0	-2.0	-2.4	-2.5
Efficiency Total (%)	59.0	59.7	59.7	60.2	65.0	65.3	64.1	63.6	63.3	57.3	56.1
Peak Gain (dBi)	1.6	1.8	2.1	2.1	2.6	2.6	2.5	2.6	2.1	2.2	2.2

### 7-3-3. 3D Efficiency vs. Frequency

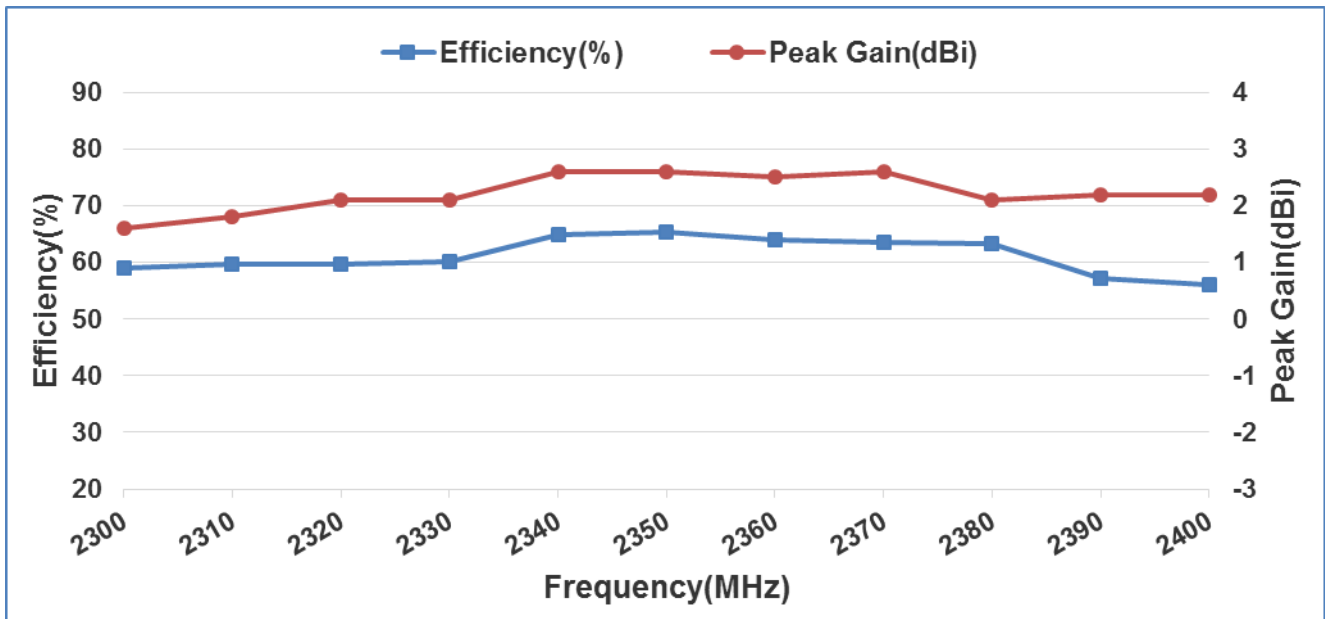

詠業科技股份有限公司  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : George

Checked by : Chinling

Approved by : Herbert

TITLE : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate Antenna (WC12H0) Engineering Specification





DOCUMENT NO.

H2B4MH1F2F0100

REV. A

## 7-4. 2490~2690 MHz Band

### 7-4-1. 3D Gain Pattern @ 2590 MHz (unit: dBi)

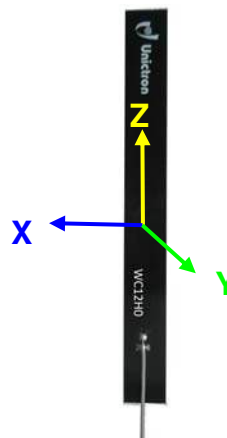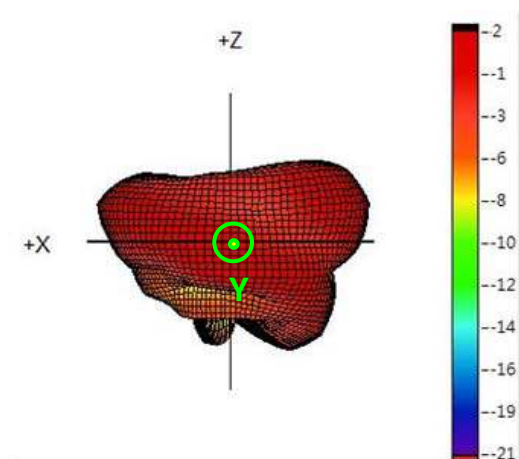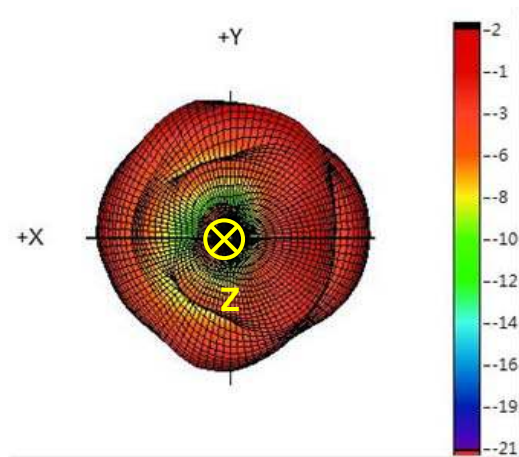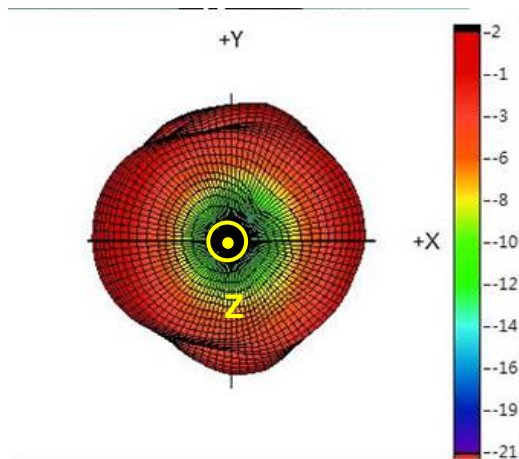

Unictron  
Technologies Corp.  
2017-09-15  
Document  
Control Center



詠業科技股份有限公司  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : George

Checked by : Chinling

Approved by : Herbert

TITLE : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate  
Antenna (WC12H0) Engineering Specification

DOCUMENT  
NO.


H2B4MH1F2F0100

REV.  
A

### 7-4-2. 3D Efficiency Table

Frequency(MHz)	2490	2510	2530	2550	2570	2590	2610	2630	2650	2670	2690
Efficiency Total (dB)	-2.2	-2.2	-2.0	-2.2	-2.9	-2.9	-2.0	-2.4	-2.4	-2.7	-2.2
Efficiency Total (%)	60.9	59.8	62.5	59.8	51.2	51.0	62.7	57.9	56.9	53.4	59.8
Peak Gain (dBi)	2.0	2.2	1.7	1.2	1.3	1.2	2.0	1.9	1.6	1.3	0.8

### 7-4-3. 3D Efficiency vs. Frequency

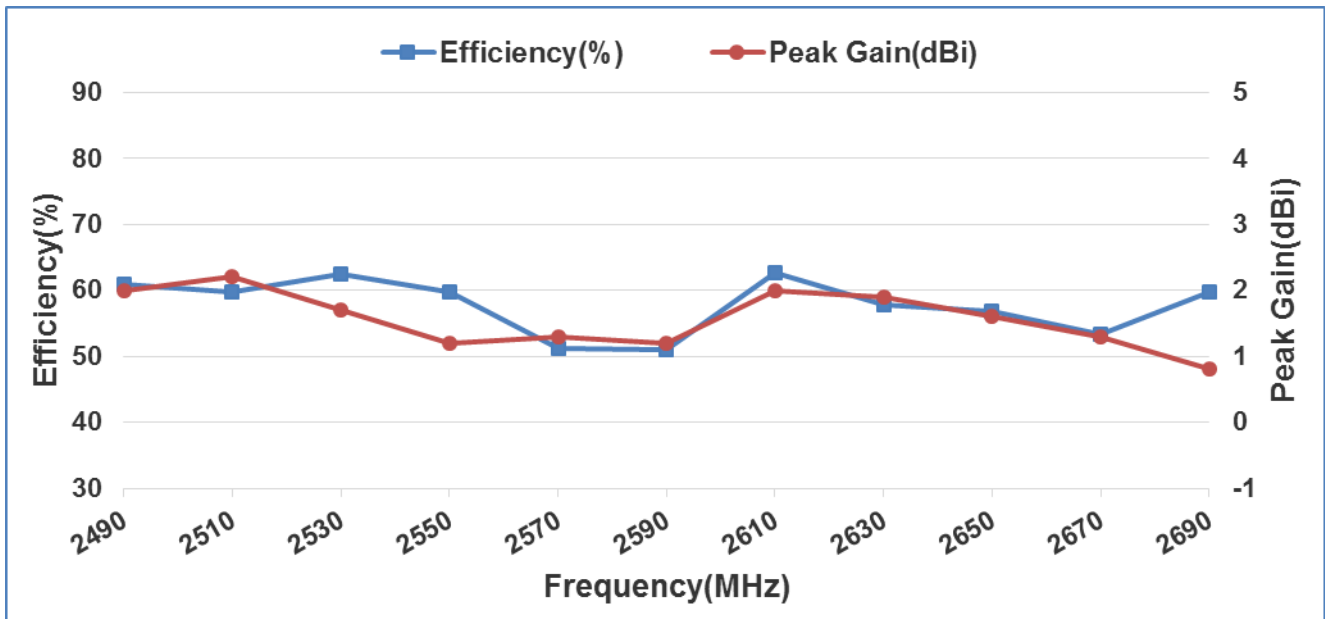

Unictron  
Technologies Corp.  
**2017-09-15**  
Document  
Control Center



**詠業科技股份有限公司**  
Unictron Technologies Corporation  
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **George**

Checked by : **Chinling**

Approved by : **Herbert**

**TITLE** : 120.0 x 13.0 x 0.15 (mm) LTE Full-Band FPCB Substrate Antenna (WC12H0) Engineering Specification

**DOCUMENT NO.**

**H2B4MH1F2F0100**

**REV.**  
**A**