


2000±50

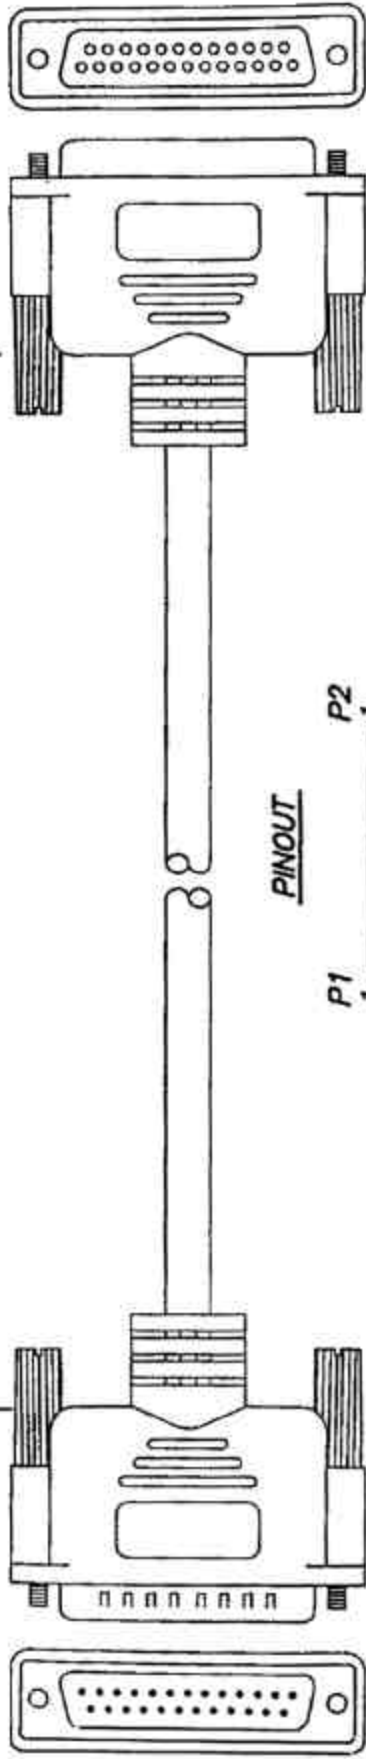

P1 MOLDED

P2 MOLDED

PINOUT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
—	—
—	—
24	24
25	25
SHELL	SHELL

PN# AK135-2

SPECIFICATION:

CABLE: NON-UL 28AWG ALUMINUM FOIL
25 CONDUCTORS+DRAIN WIRE
COLOR: BEIGE O.D: 7.0mm/m
CONNECTORS: P1 DSUB 25PIN MALE W/THUMBSCREW(4#40)
P2 DSUB 25PIN FEMALE W/THUMBSCREW(4#40)
ELECTRICAL TEST: 100% OPEN & SHORT

ASSMANN ELECTRONICS

DESCRIPTION:	DSUB 25PIN MALE TO DSUB 25PIN FEMALE CABLE				
ITEM NO.:	AK135 2M	UNIT:	M/N	SCALE:	AWNE
DRAW BY:		DATE:	96/08/12	SHELL:	1 OF 1
CHECKED:		DRAW NO.:	LN-0017	REV:	1
APPL. BY:					