


Ratings
 Voltage: 300 V
 Temperature: -80~200 °C
 Flammability: VW-1
 Oil resistance: 60 °C
 ≥50% elongation and tensile strength after aging

Conductor
 Conductor count: 1
 Gauge: 14 AWG 2.04 mm²
 Material: tinned copper strands
 Strand size: Ø 0.37mm x 19
 Resistance at 20 °C: 8.96 Ω /km max

Insulator
 Material: Fluorinated ethylene propylene (FEP)
 Color: orange
 Diameter: Ø 2.51 ± 0.1
 Nominal thickness: 0.33 mm
 Resistance at 20 °C: 2.5 MΩ /kft min

Wire marking: E339579 UL AWM STYLE 1332 14AWG 200°C 300V
 VW-1 --- cUL AWM I A/B 200°C 300V FT1 TENSILITY

Mechanical Tests
 After aging at 232±1°C for 7 days
 Minimum tensile strength 1.76 kgf/mm²
 Minimum elongation 200% original

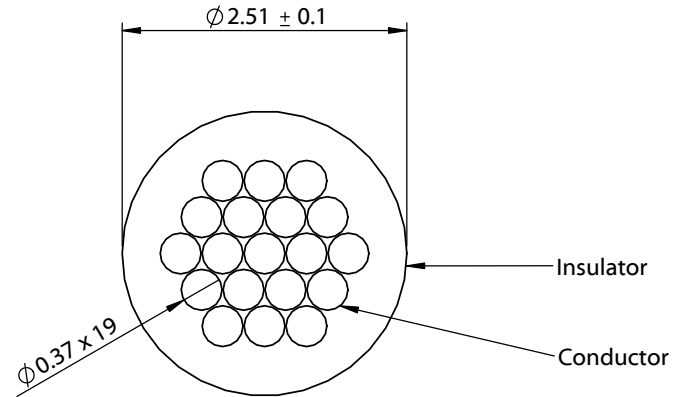

Revision:	Date:	Description:
A	05/20/2022	Initial release

Prepared: **MP**
Digitally signed by MP
 Date: 2022.05.24
 16:15:39 -07'00'

Verified: **PB**
Digitally signed by PB
 Date: 2022.05.27
 12:20:36 -07'00'

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:
 RoHS compliant

Function test: no open, no short circuit, no Intermittent

Description:
 Wire, hook-up, TS, 14 AWG, UL 1332, 300V, 200C, 2.51 mm, FEP, orange

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size:	Part number:
A	30-02527

Scale: 15:1

Sheet 1 of 1