


Silicon Power Rectifier S/R306 Series

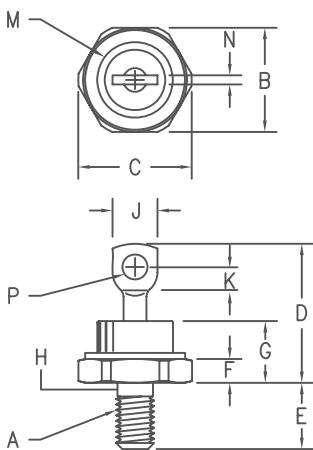

Notes:
 1. 1/4-28
 2. Full threads within
 2 1/2 threads
 3. Standard polarity:
 Stud is cathode
 Reverse polarity:
 Stud is anode

| Dim. | Millimeter | | | | |
|------|------------|---------|---------|---------|-------|
| | Minimum | Maximum | Minimum | Maximum | Notes |
| A | --- | --- | --- | --- | 1 |
| B | .667 | .687 | 16.95 | 17.44 | |
| C | --- | .793 | --- | 20.14 | |
| D | --- | 1.00 | --- | 25.40 | |
| E | .422 | .453 | 10.72 | 11.50 | |
| F | .115 | .200 | 2.93 | 5.08 | |
| G | --- | .450 | --- | 11.43 | |
| H | .220 | .249 | 5.59 | 6.32 | 2 |
| J | .250 | .375 | 6.35 | 9.52 | |
| K | .156 | --- | 3.97 | --- | |
| M | --- | .667 | --- | 16.94 | Dia |
| N | --- | .080 | --- | 2.03 | |
| P | .140 | .175 | 3.56 | 4.44 | Dia |

D0203AB (D05)

| Microsemi Catalog Number | Standard Reverse Voltage | Peak Reverse Voltage |
|-----------------------------|--------------------------------|-------------------------|
| S30620 | R30620 | 200V |
| S30640 | R30640 | 400V |
| S30660 | R30660 | 600V |
| S30680 | R30680 | 800V |
| S306100 | R306100 | 1000V |
| S306120 | R306120 | 1200V |

- Glass Passivated Die
- 1200 Amps Surge Rating
- Glass to metal seal construction
- VRM to 1200V
- Low cost Non-RoHS package

Electrical Characteristics

| | |
|-------------------------------------|-------------------------------|
| Average forward current | I _{F(AV)} 70 Amps |
| Maximum surge current | I _{FSM} 1200 Amps |
| Max $I^2 t$ for fusing | $I^2 t$ 5900 A ² s |
| Max peak forward voltage | V _{FM} 1.25 Volts |
| Max peak reverse current | I _{RM} 25 μ A |
| Max peak reverse current | I _{RM} 4.0 mA |
| Max Recommended Operating Frequency | 10kHz |

*Pulse test: Pulse width 300 μ sec. Duty cycle 2%

T_C = 146°C, Half Sine Wave, R_{θJC} = 0.8°C/W
 8.3ms, half sine, T_J = 200°C
 I_{FM} = 200A: T_J = 25°C*
 V_{RRM,TJ} = 25°C
 V_{RRM,TJ} = 150°C

Thermal and Mechanical Characteristics

| | | |
|-------------------------------|------------------|------------------------------|
| Storage temperature range | T _{STG} | -65°C to 200°C |
| Operating junction temp range | T _J | -65°C to 200°C |
| Maximum thermal resistance | R _{θJC} | 0.8°C/W Junction to Case |
| Mounting torque | | 25–30 inch pounds |
| Weight | | .6 ounces (17 grams) typical |



6 Lake Street
 Lawrence, MA 01841
 PH: (978) 620-2600
 FAX: (978) 689-0803
www.microsemi.com

05-02-07 Rev. 3

S/R 306

Figure 1
Typical Forward Characteristics

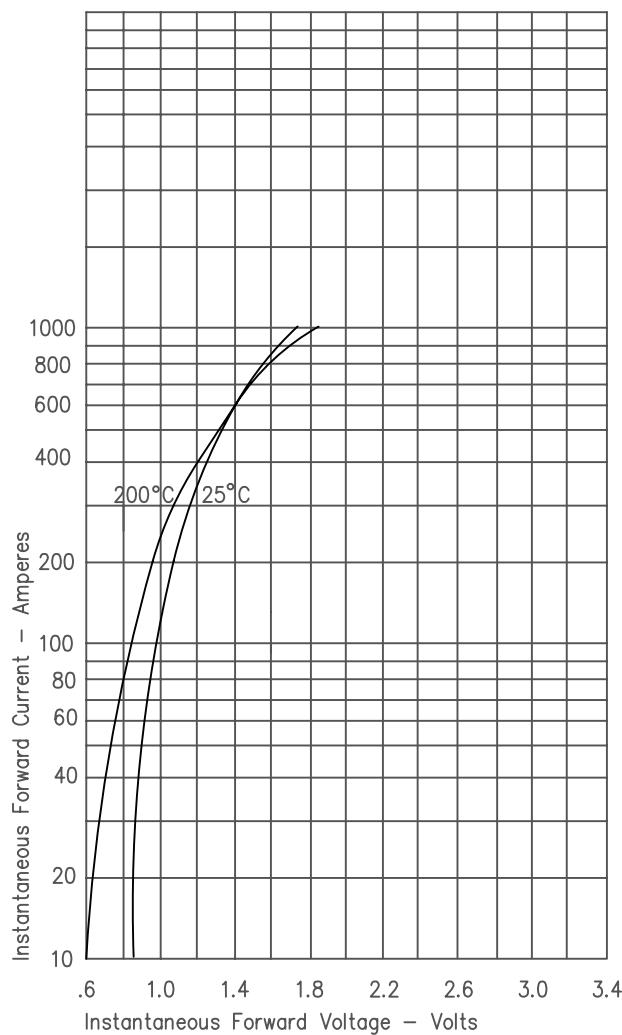


Figure 2
Typical Reverse Characteristics

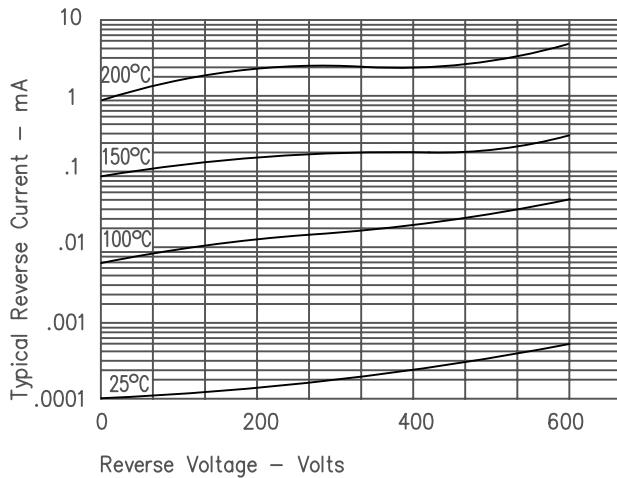


Figure 3
Forward Current Derating

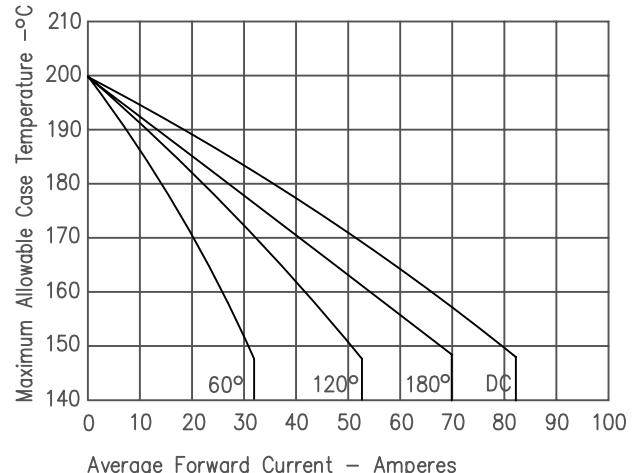


Figure 4
Maximum Forward Power Dissipation

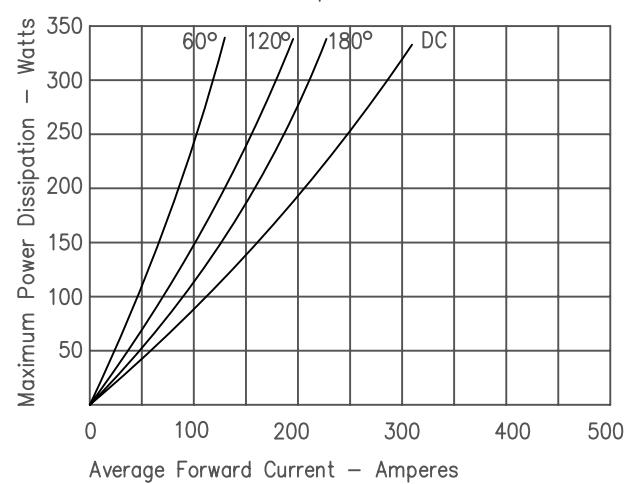


Figure 5
Transient Thermal Impedance

