



5

4

3

2


1

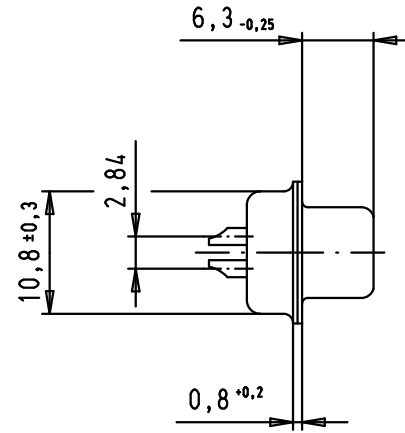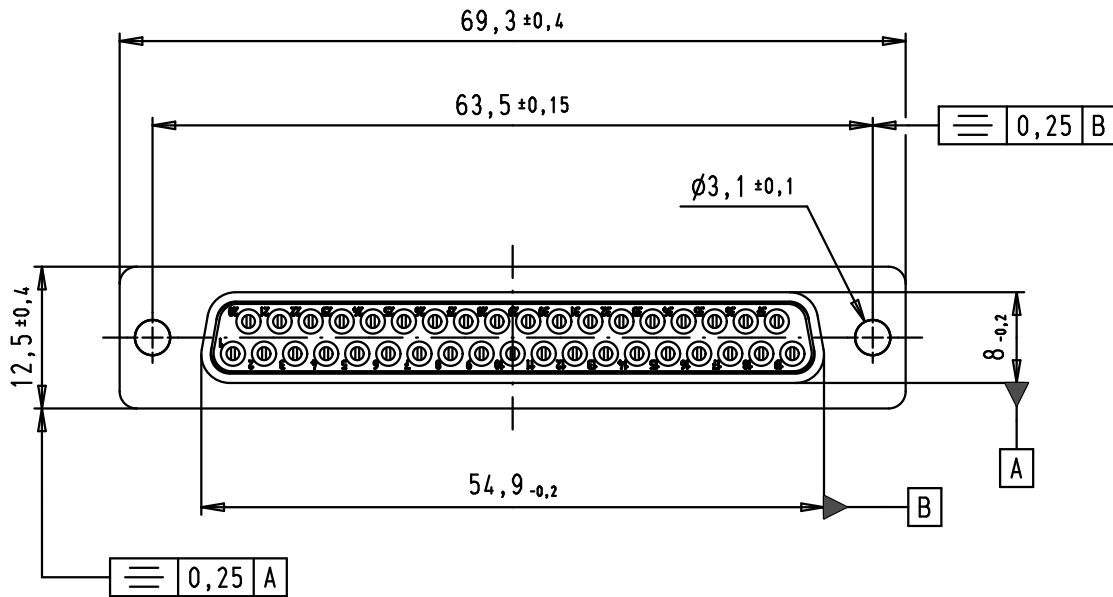


SPECIFICATIONS

Mating cycles	500
Filter type	C
Capacitance	470 pF ± 20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1
50	10
100	15
500	35
1000	32

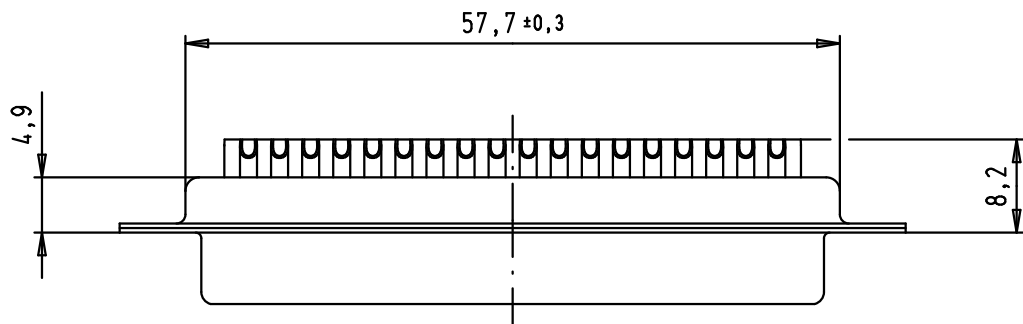

Solder buckets for AWG 20

						 D-Sub, female, straight, 37 poles, turned solder buckets	Maßstab/ Scale 1,5:1
			Detail.	08/07/02	CV		All Dim. in mm Orig. Size DIN A 4
			Insp.				
35300	01/12/08	PK	Stand.				
33800	18/08/06	PK					
31058	08/07/02	CV				HARTING EURL F-95972 Paris	TB 09 64 411 7220 Sub.
Mod.	Det.	Name					

