



Premium Quadraplexer


For commercial signal boosters

BOLTON | 
TECHNICAL

BT512297

Allows up to four outdoor antennas for your cellular system.

- Filters out unwanted noise for crystal clear reception
- Low-loss, Low-PIM: less than 0.5 dB insertion loss
- Compact, low weight quadraplexer with easy installation
- 50 Ohm impedance with N-Female termination

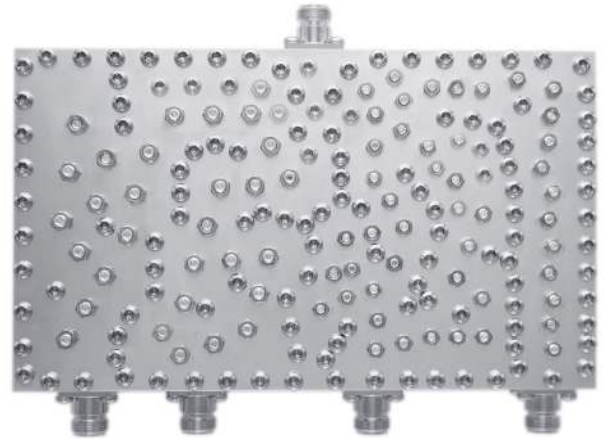

ELECTRICAL STUFF

Product Specifications may change without prior notice.

Item No.	BT512297
Frequency	CH1: 698 to 806MHz
Frequency	CH2: 824 to 896MHz
Frequency	CH3: 1850 to 2000MHz
Frequency	CH4: 1710 to 1755MHz & 2110 to 2170MHz
Return Loss	>18dB
Insertion Loss	≥0.5dB
Isolation / Rejection	40dB minimum
Power handling	50 W Avg; 1000W Peak
Connectors	N-Female
Impedance	50 Ohm



QUESTIONS? CALL US TODAY
888-987-2658



sales@boltontech.com



www.boltontech.com



5010 Wright Road, Suite 115
Stafford, TX, 77477

