

Fiber optic cables - VS-P1211-P1217-C1000/ 1,0 - 1608731

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled PROFINET-FO cable, round cable, polymer fiber 980/1000 μm , SCRJ/IP67 push-pull metal housing on SCRJ/IP20, for installation inside buildings, the conductor is suitable for the UV-protected outside insert, length: 1 m



Key commercial data

| | |
|--------------------------------------|------------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 222.22 GRM |
| Custom tariff number | 85447000 |
| Country of origin | Germany |

Technical data

Mechanical characteristics

| | |
|-----------------------------|--------------------------------|
| Number of positions | 2 |
| Connection profile | SCRJ in acc. with IEC 61754-24 |
| Locking type | Push Pull |
| Fiber | 980/1000 μm |
| Number of fibers | 2.00 |
| Insertion/withdrawal cycles | ≥ 500 |
| Type of cable | Round cable |
| Length of cable | 1 m |

Ambient conditions

| | |
|---------------------------------|---|
| Ambient temperature (operation) | -30 °C ... 70 °C (cable, fixed installation) |
| | -20 °C ... 60 °C (cable, flexible installation) |
| | Plug / socket |
| Degree of protection | IP67/IP20 |

Material data

| | |
|------------------|-------------------|
| Housing material | Zinc die-cast/PBT |
|------------------|-------------------|

Fiber optic cables - VS-P1211-P1217-C1000/ 1,0 - 1608731

Technical data

Material data

| | |
|------------------------|-----------------------|
| Material, O-ring | NBR |
| Cable seal material | TPE |
| Outer sheath, material | LSFH |
| External sheath, color | green-yellow RAL 6018 |
| Ferrule holder color | Blue |

Optical characteristics

| | |
|-------------|------------------------|
| Attenuation | ≤ 1.7 dB (with 660 nm) |
|-------------|------------------------|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27061803 |
| eCl@ss 6.0 | 27061803 |

ETIM


| | |
|----------|----------|
| ETIM 3.0 | EC000034 |
| ETIM 4.0 | EC001476 |
| ETIM 5.0 | EC000034 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 31261501 |


Drawings

Schematic diagram



Pin assignment plug SCRJ


Schematic diagram



Pin assignment plug SCRJ


Fiber optic cables - VS-P1211-P1217-C1000/ 1,0 - 1608731

Dimensioned drawing

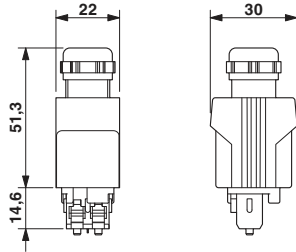

SCRJ Push-Pull connector, IP67

Dimensioned drawing

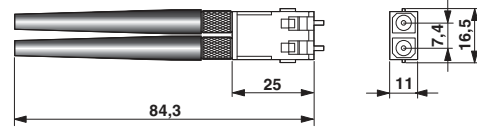

SCRJ connector IP20