




PORT) MICRO WITH 5 POLE (5 WIRE) RECEPTACLES - 19 POLE HARD SHELL CONNECTOR

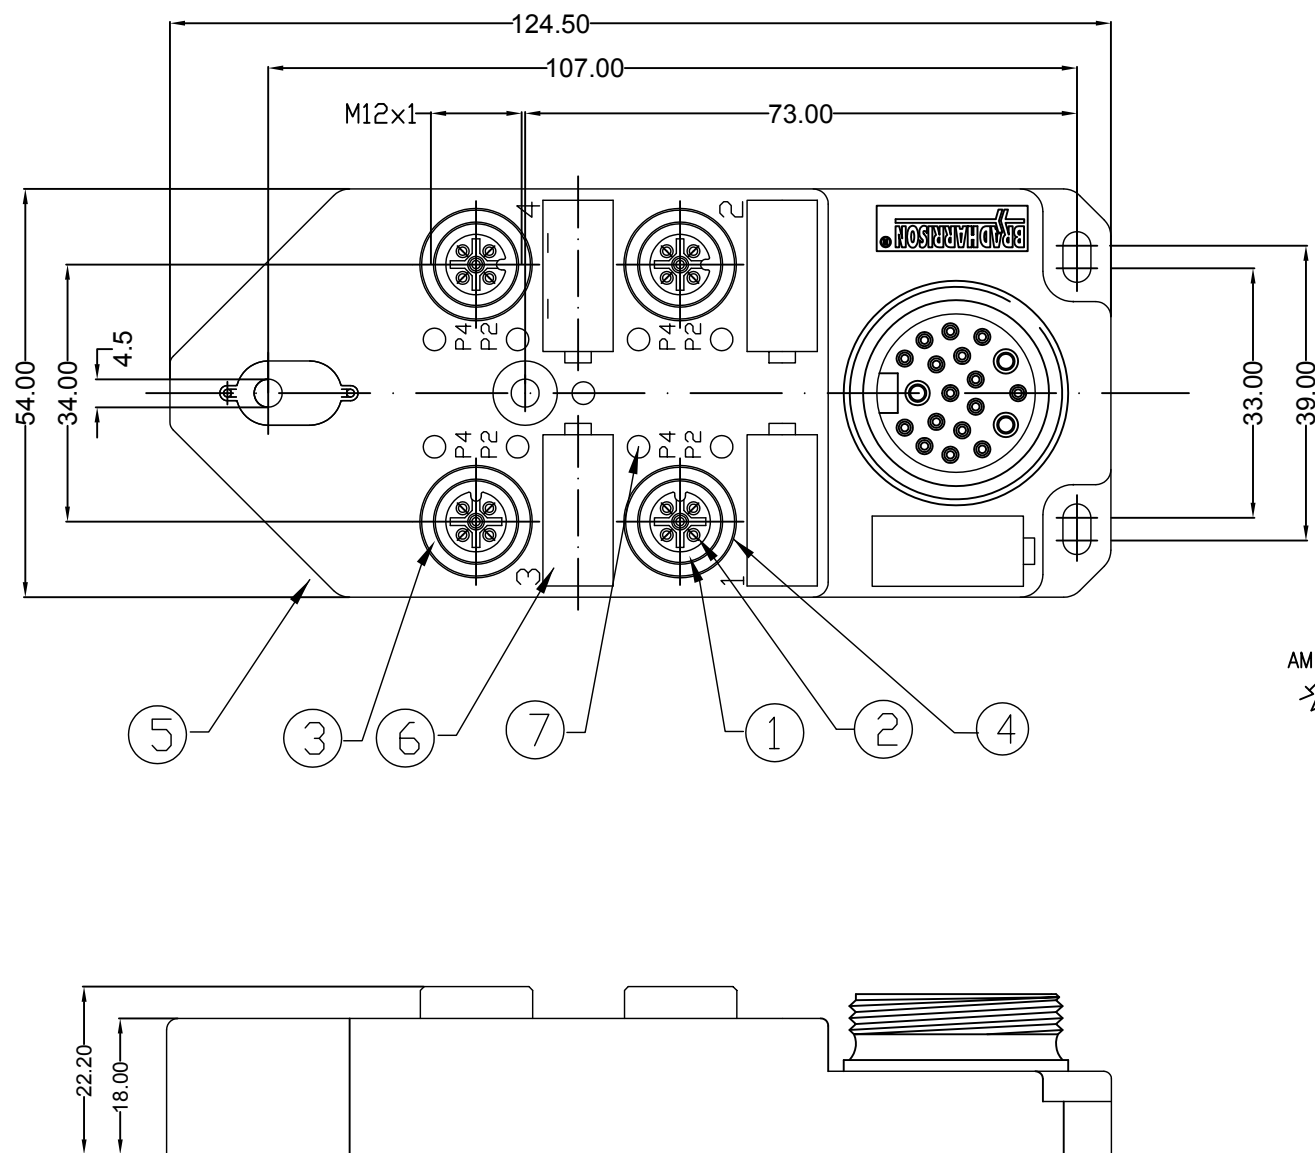

FACE VIEW OF END RECEPTACLE



NOTE
PINS 1,2,9,10,11,13,17,18 NOT USED

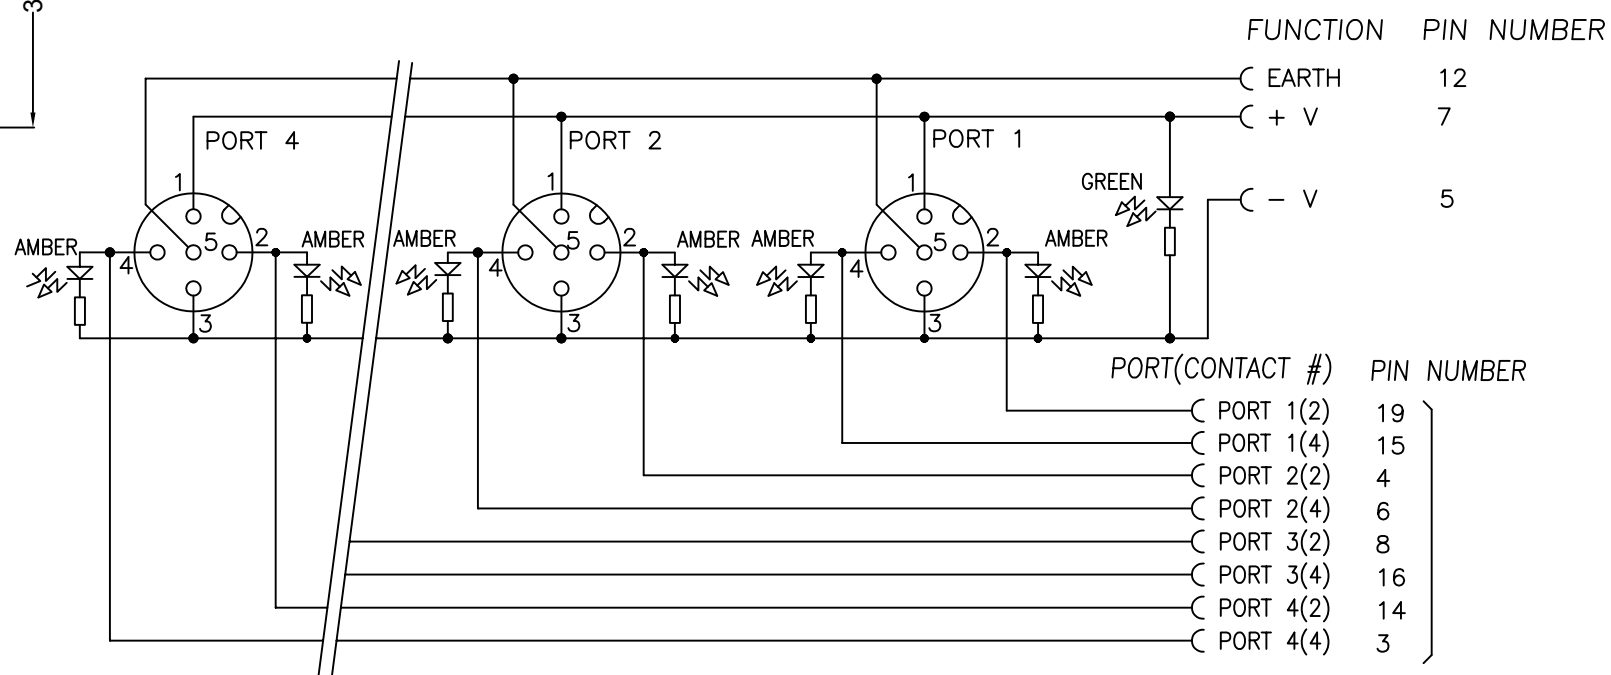

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH	CABLE JACKET MATERIAL
1201140030	BTY403P-FBB	-	-

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	NITRILE	RED
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	NYLON	CLEAR

DESCRIPTION EC NO: WEU2010-0423 DRWN: LSTEMMLE 2010/03/08 CHKD: NSTAUDIG APPR: NSTAUDIG 2010/03/16	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±.01 1 PLACE ±0.3 ±--- ANGULAR ± --- °	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			MM ONLY	2:1	METRIC		
			DRAWN BY	DATE	MICRO-CHANGE MPIS 4 PORT PNP TOP MOUNT MINI-CHANGE		
			LSTEMMLE	2010/03/08			
			CHECKED BY	DATE			
			APPROVED BY	DATE	MOLEX INCORPORATED		
			NSTAUDIG	2010/03/15			
			MATERIAL NO.	DOCUMENT NO.	SD-120114-017	SHEET NO.	
			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			A3	1 OF 1			