

HANDLE SHANKS

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

To prevent tube rotation, screw up to the stop the self-tapping screw $\varnothing 3,9 \times 6,5$ arranged inside the handle shank.

CLOSING CAPS

Polyamide based (PA) technopolymer, black colour, matte finish. Included in the supply, push-fit assembly (Fig.1), removable by a screwdriver.

Available also as accessories sold separately (see table ECS).

| Code | Description |
|----------|-------------|
| 29882-C9 | ECS.T2-C9 |

TUBE

AISI 304 stainless steel.

MOUNTING

Pass-through hole for front or rear mounting by means of cylindrical-head screws with hexagon socket, hexagonal-head screws or standard nuts.

TECHNICAL DATA

Tensile stress: F values reported in the table are the result of breaking tests carried out with the appropriate dynamometric equipment under the test conditions shown in the figure with ambient temperature.



SPECIAL EXECUTIONS ON REQUEST

- Different lengths.
- Closing caps in different colours.



ELESA Original design

Fig.1

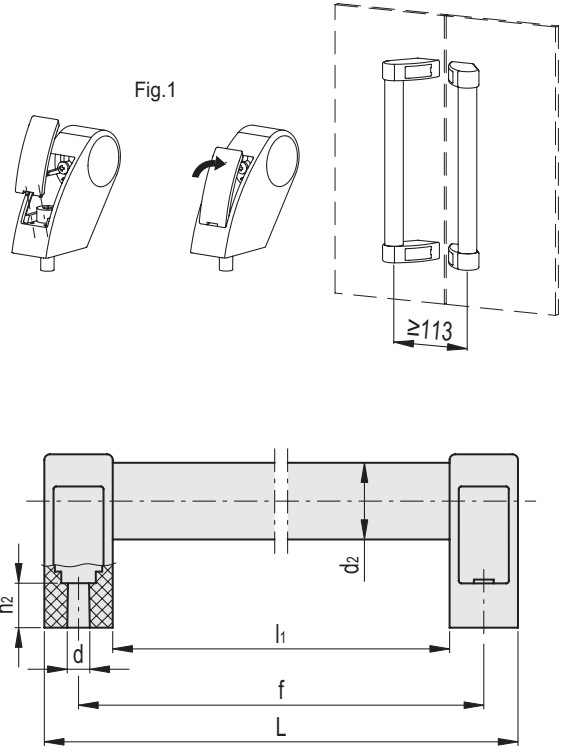

| Conversion Table | | | |
|-------------------|-------|-----|------|
| 1 mm = 0.039 inch | | | |
| L | | d | |
| mm | inch | mm | inch |
| 327 | 12.87 | 8.5 | 0.33 |
| 377 | 14.84 | | |
| 427 | 16.81 | | |
| 527 | 20.75 | | |
| 627 | 24.68 | | |
| 727 | 28.62 | | |

| Code | Description | d2 | f±1 | f1 | L | d | h | h1 | h2 | l | l1 | l2 | l3 | F1 [N]* | F1 [N]# | F2 [N]* | F2 [N]# | ⚖ |
|-------|-------------------|----|-----|------|-----|-----|------|----|------|----|-----|----|----|---------|---------|---------|---------|-----|
| 36807 | M.1053/30-300-SST | 30 | 300 | 37.5 | 327 | 8.5 | 68.5 | 50 | 17.5 | 42 | 273 | 75 | 56 | 2600 | 4700 | 3500 | 5600 | 231 |
| 36817 | M.1053/30-350-SST | 30 | 350 | 37.5 | 377 | 8.5 | 68.5 | 50 | 17.5 | 42 | 323 | 75 | 56 | 2500 | 4600 | 3300 | 5200 | 249 |
| 36827 | M.1053/30-400-SST | 30 | 400 | 37.5 | 427 | 8.5 | 68.5 | 50 | 17.5 | 42 | 373 | 75 | 56 | 2100 | 3900 | 3000 | 4500 | 266 |
| 36837 | M.1053/30-500-SST | 30 | 500 | 37.5 | 527 | 8.5 | 68.5 | 50 | 17.5 | 42 | 473 | 75 | 56 | 1950 | 3000 | 2850 | 3600 | 301 |
| 36847 | M.1053/30-600-SST | 30 | 600 | 37.5 | 627 | 8.5 | 68.5 | 50 | 17.5 | 42 | 573 | 75 | 56 | 1650 | 2850 | 2100 | 3600 | 336 |
| 36857 | M.1053/30-700-SST | 30 | 700 | 37.5 | 727 | 8.5 | 68.5 | 50 | 17.5 | 42 | 673 | 75 | 56 | 1500 | 2400 | 1800 | 2800 | 371 |

* Maximum working load # Load at breakage.

