


REV. 1 5/28/98

COIL: @ +25 °C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE 4 MS MAX
	RELEASE 4 MS MAX
	CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

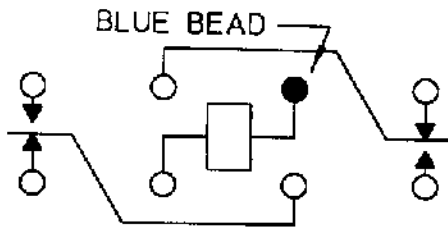

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE 100,000
	OPERATIONS

DR. R.B. 10/28/96 CK. 5/28/98



CUST. OPL
CUST. NO. M39016/6-109L

TYPE "HFW" RELAY

HFW1201K45