


ROHS COMPLIANT

PIN OUT: 1T01

| Male | Female | Color |
|--------|--------|--------------|
| PIN1 | PIN1 | Black |
| PIN2 | PIN2 | Brown |
| PIN3 | PIN3 | Red |
| PIN4 | PIN4 | Orange |
| PIN5 | PIN5 | Yellow |
| PIN6 | PIN6 | Green |
| PIN7 | PIN7 | Blue |
| PIN8 | PIN8 | Purple |
| PIN9 | PIN9 | Gray |
| PIN10 | PIN10 | White |
| PIN11 | PIN11 | Pink |
| PIN12 | PIN12 | Light green |
| PIN13 | PIN13 | Black/white |
| PIN14 | PIN14 | Brown/white |
| PIN15 | PIN15 | Red/white |
| PIN16 | PIN16 | Orange/white |
| PIN17 | PIN17 | Green/white |
| PIN18 | PIN18 | Blue/white |
| PIN19 | PIN19 | Purple/white |
| PIN20 | PIN20 | Red/black |
| PIN21 | PIN21 | Orange/black |
| PIN22 | PIN22 | Yellow/black |
| PIN23 | PIN23 | Green/black |
| PIN24 | PIN24 | Gray/black |
| PIN25 | PIN25 | Pink/black |
| SHIELD | SHIELD | Drain Wire |

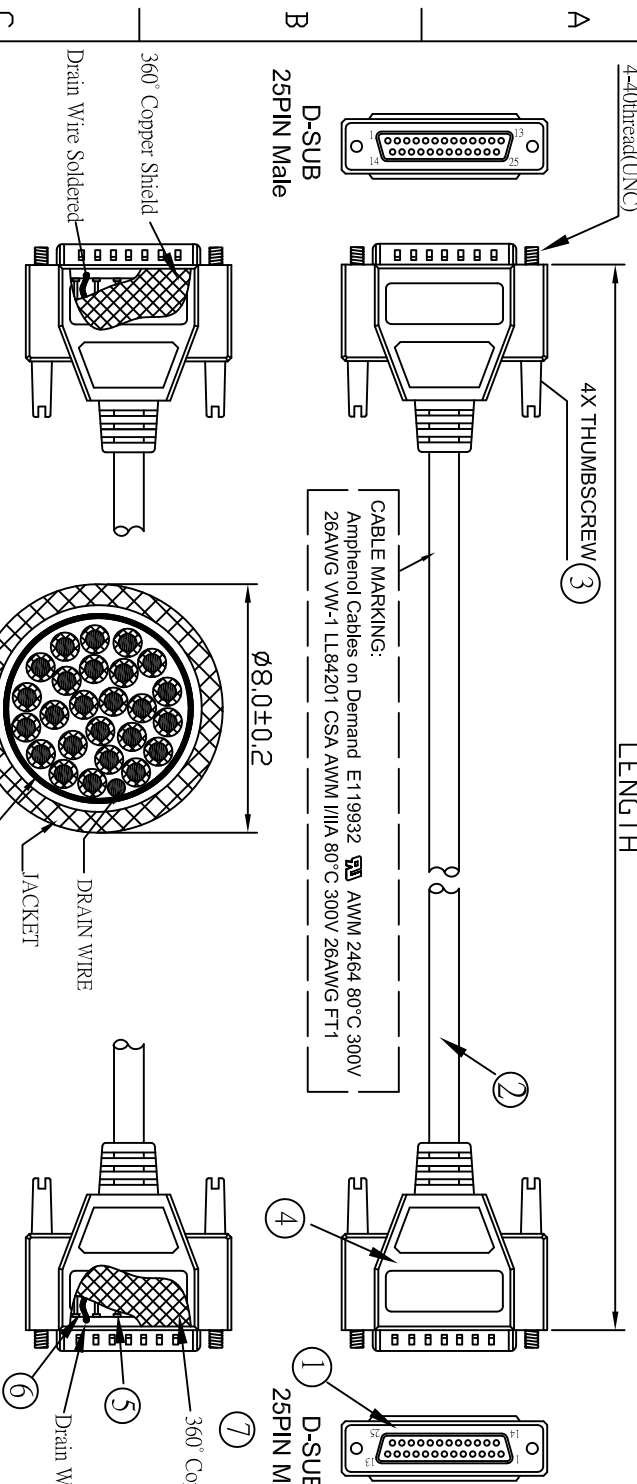

LENGTH & P/N Table

| LENGTH | BN P/N | CUSTOMER P/N |
|----------------------|--------------------------|---------------------|
| 2.5FT (<762±20mm) | TL2G25C26HF1CK10-2.5FT-G | CS-DSDMDB25MM-002.5 |
| 5FT (<1524±30mm) | TL2G25C26HF1CK10-5FT-G | CS-DSDMDB25MM-005 |
| 10FT (<3048±50mm) | TL2G25C26HF1CK10-10FT-G | CS-DSDMDB25MM-010 |
| 15FT (<4572±50mm) | TL2G25C26HF1CK10-15FT-G | CS-DSDMDB25MM-015 |
| 25FT (<7620±100mm) | TL2G25C26HF1CK10-25FT-G | CS-DSDMDB25MM-025 |
| 50FT (<15240±200mm) | TL2G25C26HF1CK10-50FT-G | CS-DSDMDB25MM-050 |
| 125FT (<38100±300mm) | TL2G25C26HF1CK10-125FT-G | CS-DSDMDB25MM-125 |

CUSTOMER: Amphernet
Cable Color: Gray(BN:HF)

| NO. | NAME | MATERIAL | SPECIFICATION | QTY | REMARK |
|-------|------------------|--------------|--|-----|-------------------------------|
| ⑦ | Metal Foil | Copper | 28X110X0.08mm | 2 | ZFCUSAX03 |
| ⑥ | Heat Shrink Tube | EVA | φ1.5X30mm | 2 | ZR1.5X30BK |
| ⑤ | Heat Shrink Tube | EVA | φ1.5X10mm | 50 | ZR10.0BK |
| ④ | SR | PVC | Gray(BN:HF) UL94V-0 | 2 | PLHPBX102NXX PLPVCXXHF2N35 |
| ③ | THUMBSCREW | PC/STEBL | # 4-40thread,Nickel Plated,Gray PC | 4 | ZTADSUB05 |
| ② | CABLE | PVC | UL2464 25C 26AWG DRAIN+ALMNY | 1 | TC25DD26XXXXCX496 |
| ① | CONNECTOR | Copper alloy | 25PIN Male , Nickel Plated, Gold Flash | 2 | ZSS25MXXXXXX |
| APPD. | P/N. | | TL2G25C26HF1CK10-XXX-G | | |
| CHKD. | FILE | | TLXX25C26XXXXCK10.DWG | | |
| DR. | TITLE | | Deluxe 25PIN D-Sub MM | | |

| REV. | DESCRIPTION | DATE | ENG. | APPROVAL |
|------|-------------------|-------------|------------|----------|
| A1 | Add writing color | 16/JAN/2012 | ZHEN HUIMO | |
| A | NEW RELEASE | 03/JAN/2007 | ZHEN HUIMO | |

BEST NICE ELECTRONIC
Tel:(07)526910206 6910230 Fax:6907192

| | | | |
|-------|------|------|------|
| SCALE | UNIT | SIZE | REV. |
| / | MM | A4 | A1 |