Panasonic

Linear Position Sensors (for reference only)

Japan Malaysia






Features

- High performance that guarantees a terminal-based linearity within ±0.5%
- A wide variety of operation strokes
- Long life and high resolution
- Recommended Applications
- Detection of still camera/camcorder lens positions
- Detection of car seat positions
- Steering wheel tilt and telescopic controller
- Car headlight angle detection sensor

Explanation Part Numbers




Specifications

		EVAJ, EVAWA, EVAWM	EVAW7	
Mechanical	Stroke	13.0 mm±0.5 mm 18.0 mm±0.5 mm 32.0 mm±0.5 mm	9.0 mm±0.5 mm	8.0 mm±0.5 mm
	Operating Force	0.25 N max. (Measurement speed: 5 mm/s to 25 mm/s)	2 N max.	1 N max.
Electrical	Linearity	±1 % (±0.5 %)	±2 %	±1 %
	Total Resistance	10 kΩ±30 %	10 kΩ±30 %	4.7 kΩ±30 %
	Voltage Rating	5 Vdc max.	5 Vdc max.	12 Vdc max.
	Taper	В	В	
Endurance	Operating Life	100000 cycles min. (Type capable of 200000 or more operaton is also available)	10000 cycles min.	10000 cycles min.
Minimum Quantity/Packing Unit		100 pcs. (Tray Pack)	300 pcs. (Tray Pack)	200 pcs. (Tray Pack)
Quantity/Carton		500 pcs.	3000 pcs.	2000 pcs.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Panasonic

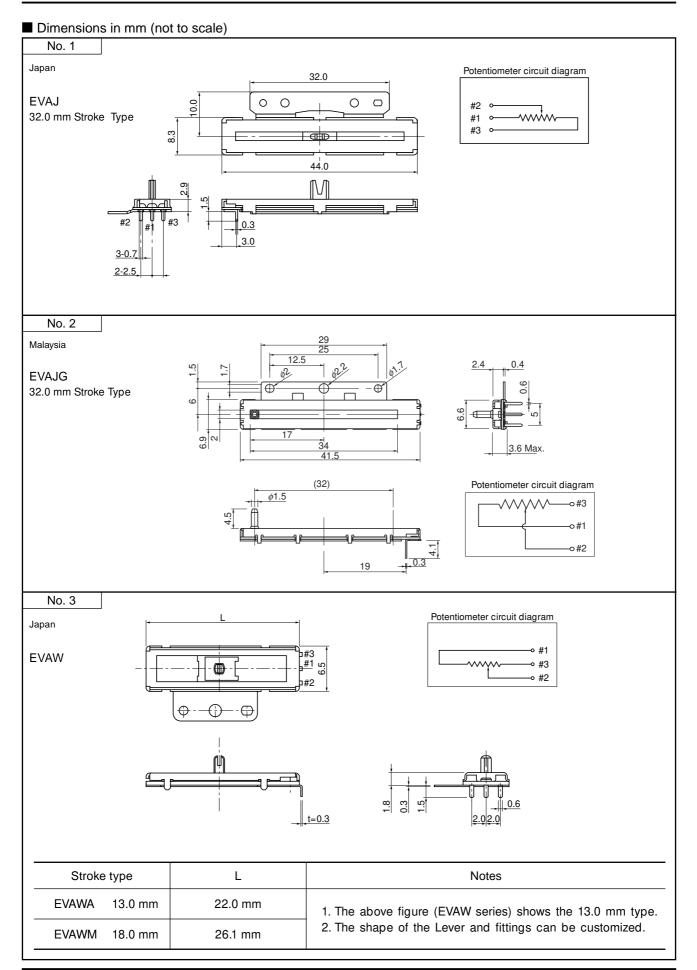

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Panasonic

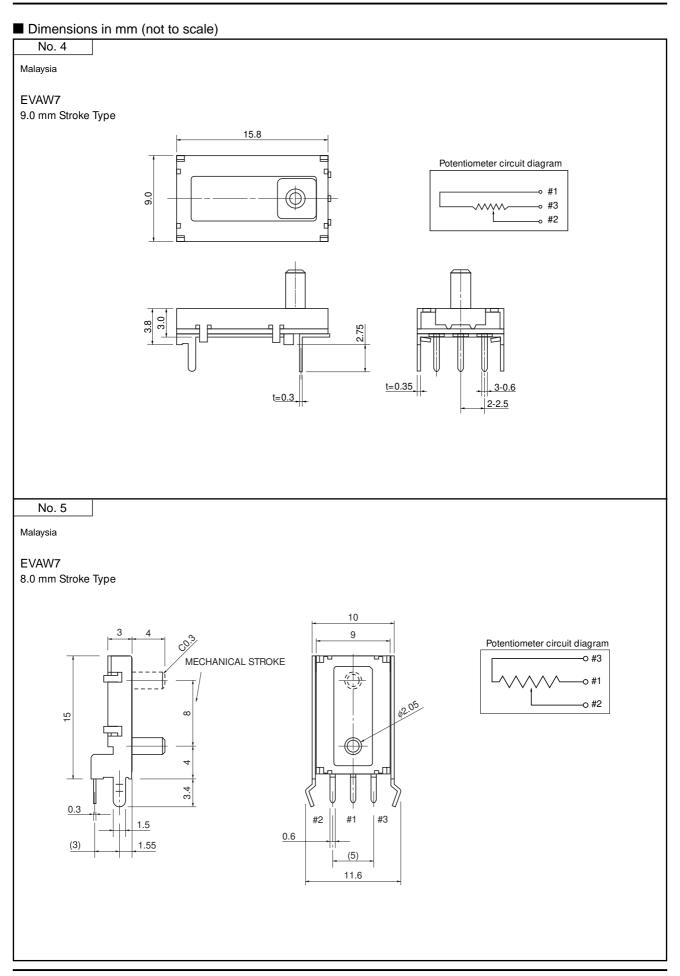

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.