



2 ASSEMBLED

HRS DRAWING FOR REFERENCE

- NOTE 1. THIS PRODUCT IS DELIVERED SEPARATELY.
- 2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT · DH40-51S· or · DH3\*B-51S· A CLAMP · DH-51-CMB(9.6)· IS NEEDED WHEN ASSEMBLING THE UNIT.
  - 3. THIS PRODUCT SHALL BE MATED WITH A RECEPTACLE · DH60-51P\*· WHICH ASSEMBLED LOCK SCREWS · DH-LNA\*\*\*·.
  - 4 A RECOMMENDED SCREW TIGHTENING TORQUE TO THE LOCK SCREWS TO BE FROM 0.06 TO 0.07 N · m.
  - 5 A RECOMMENDED SCREW TIGHTENING TORQUE FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

3	STAINLESS STEEL	PLATING : NICKEL 0.1 μm MIN	5	STEEL	OVER PLATING: NICKEL 3 μm MIN UNDER PLATING: COPPER 0.1 μm MIN		
2	PC	UL94V-0 (SAND BEIGE)	4	STEEL	OVER PLATING : NICKEL 2 μm MIN UNDER PLATING : COPPER 1 μm MIN M2X0.4		
1	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm		2 : 1	1	DIS-E-00002570	TS: ITO	TU: TANIUCHI	20191007

**HRS** HIROSE ELECTRIC CO., LTD.  
 Approved : KN. ICHIKAWA 20100405 DRAWING EDC-126589-13-13  
 CHECKED : KN. ICHIKAWA 20100405 PART NO. DH-51-CV1B(13)  
 DESIGNED : MO. SHIMOYAMA 20100405 CODE CL244-0012-0-13  
 DRAWN : TM. ONO 20100405 NO. 1

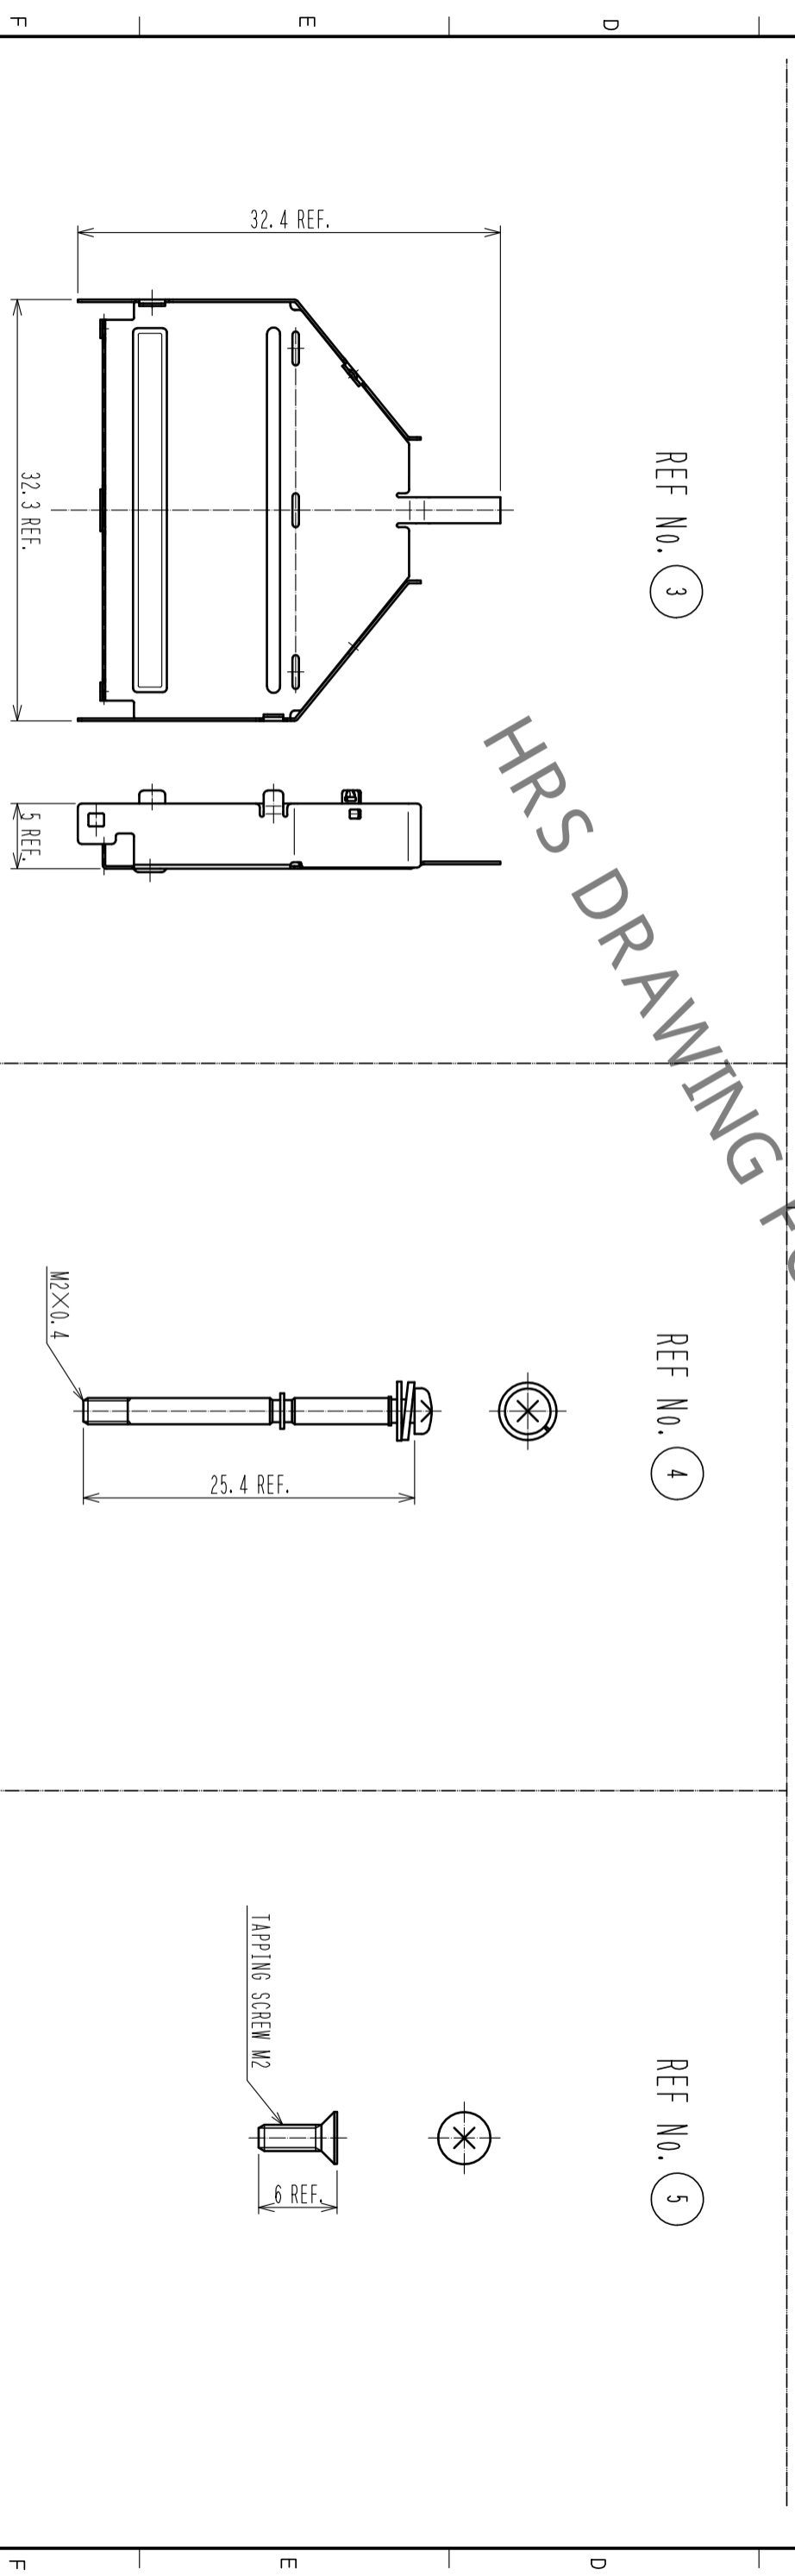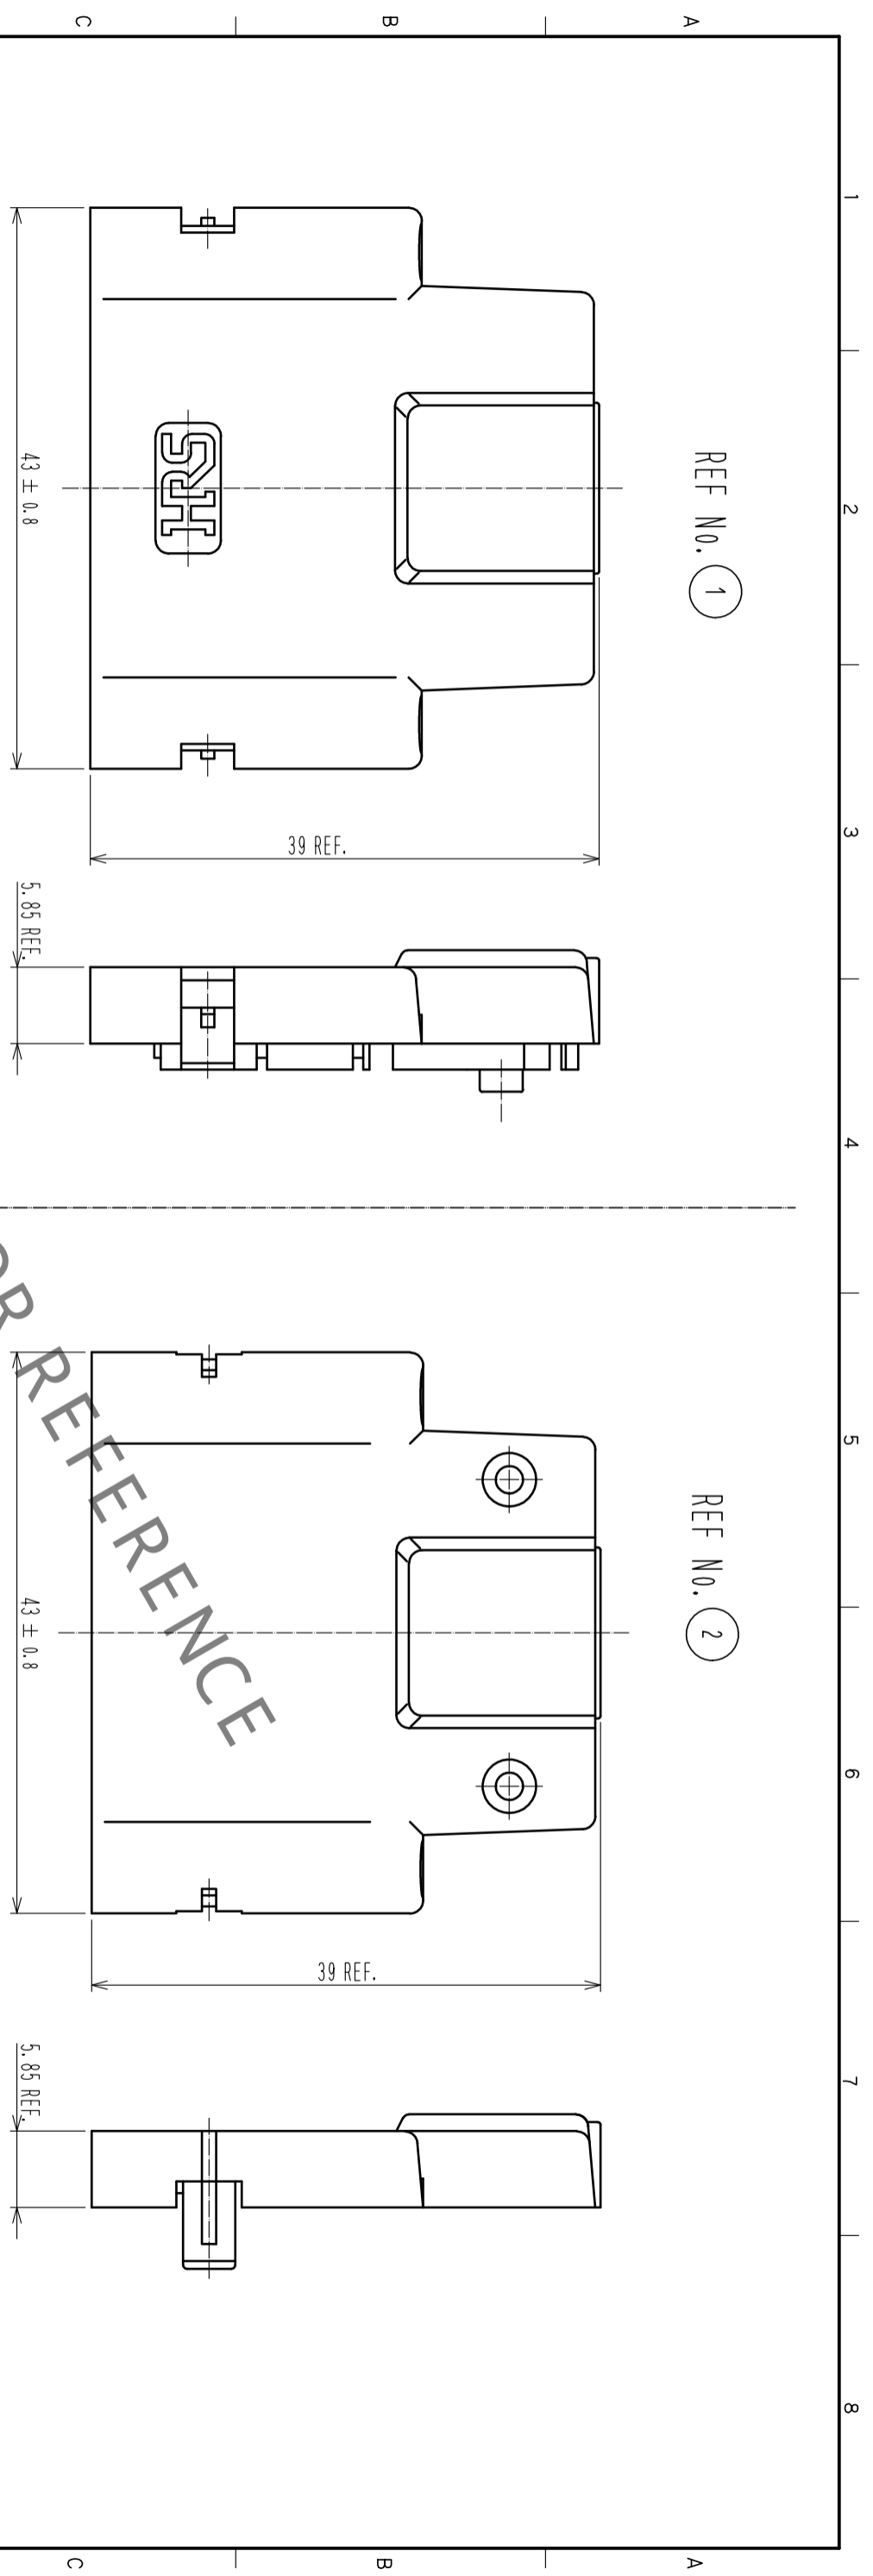

HRS DRAWING FOR REFERENCE

<b>HRS</b>	
DRAWING NO.	EDC-126589-13-13
PART NO.	DH-51-CV1B(13)
CODE NO.	CL244-0012-0-13
A/2	

FORM HC0011-5-8