

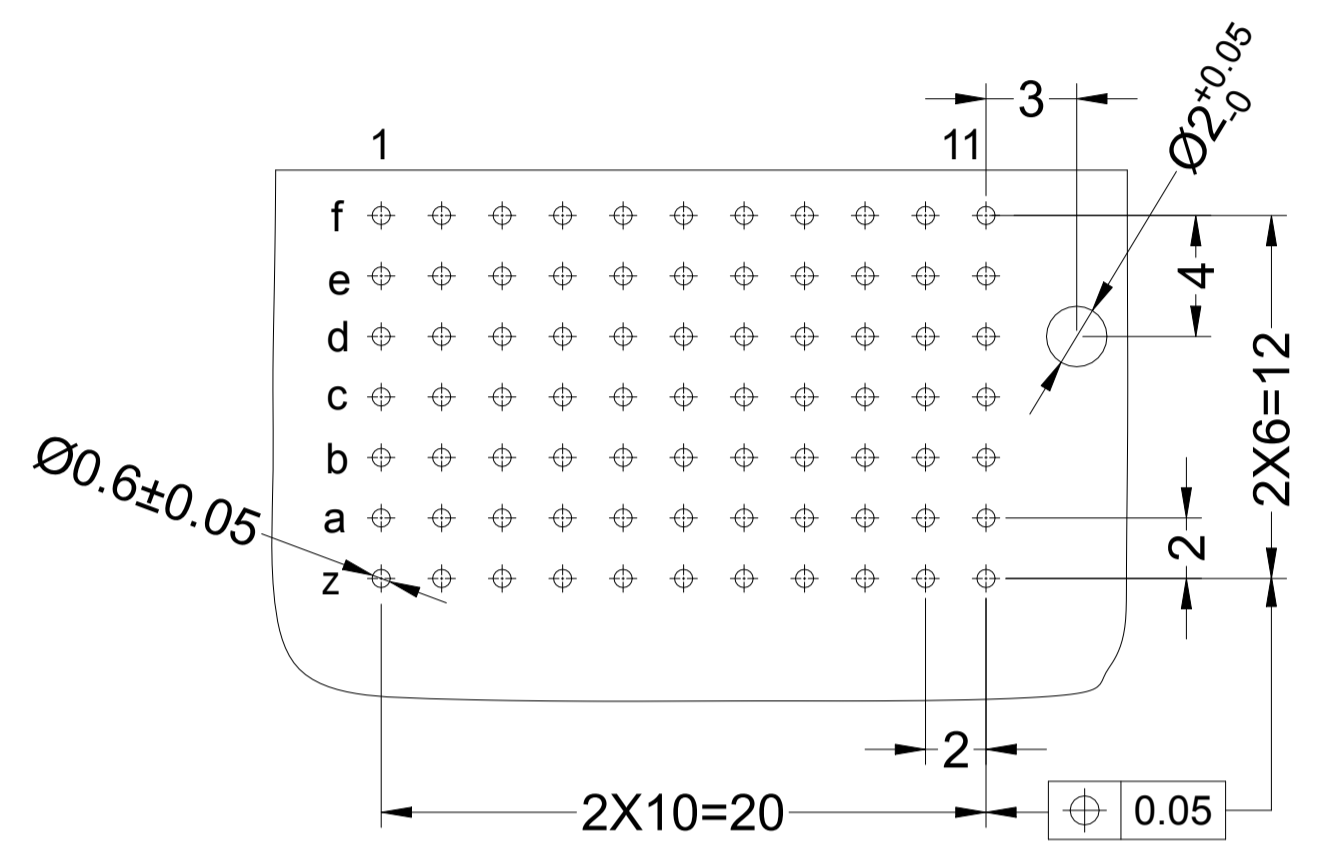
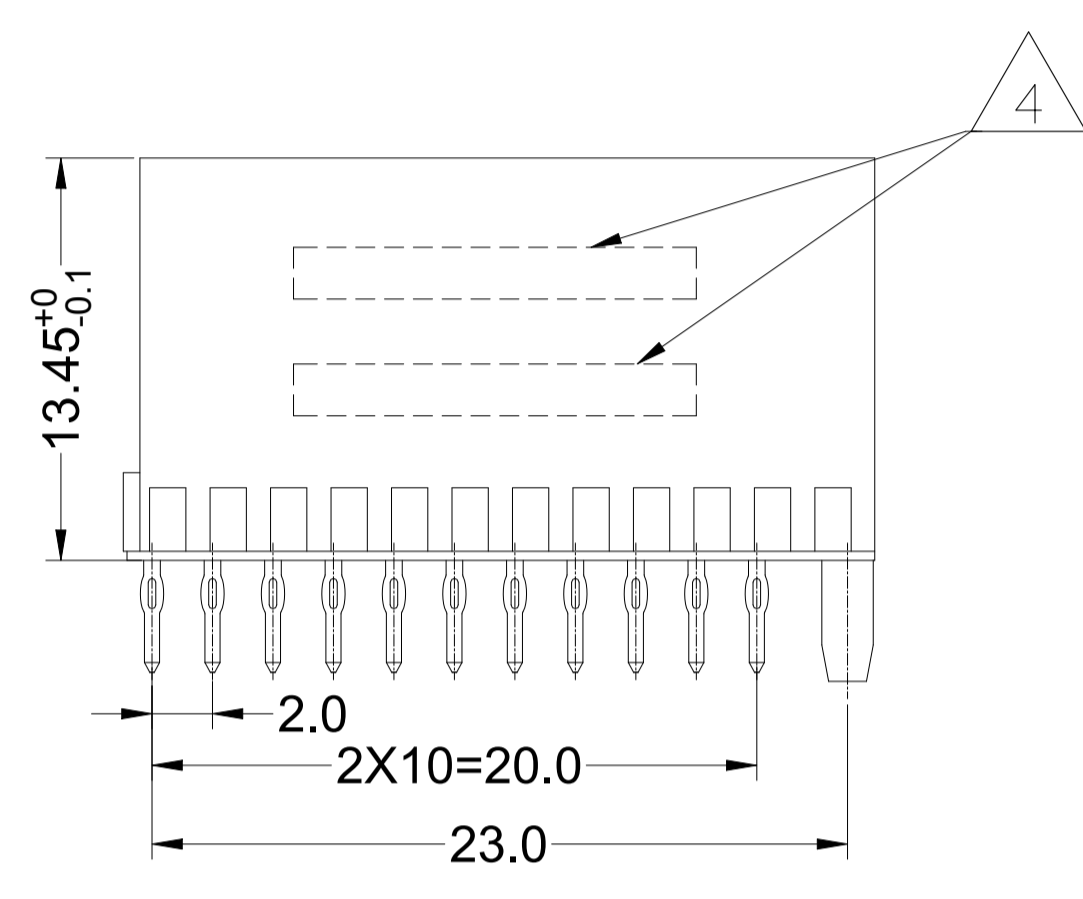
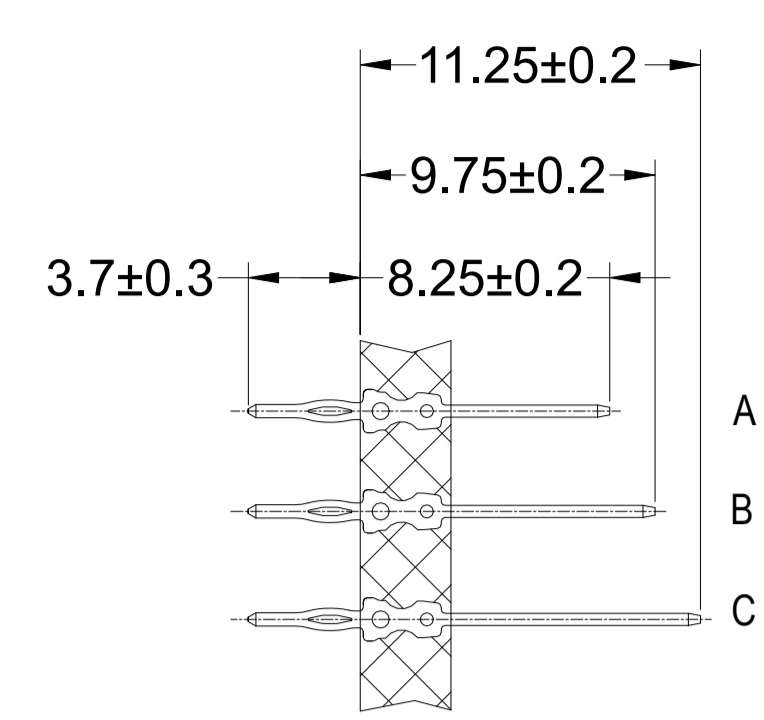
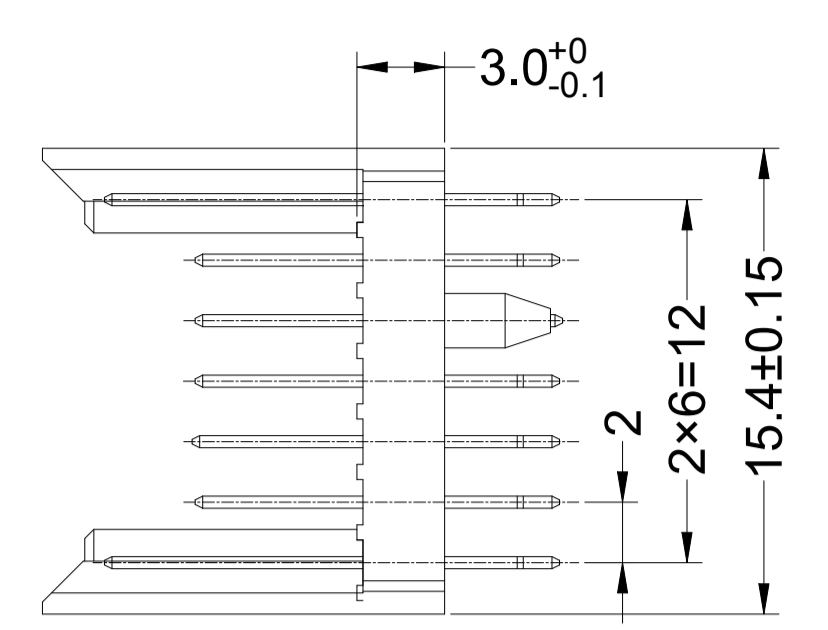


REVISIONS				
P	LTR	DESCRIPTION	DATE	APP'D
A		INITIAL DRAWING	18OCT2021	TL HL

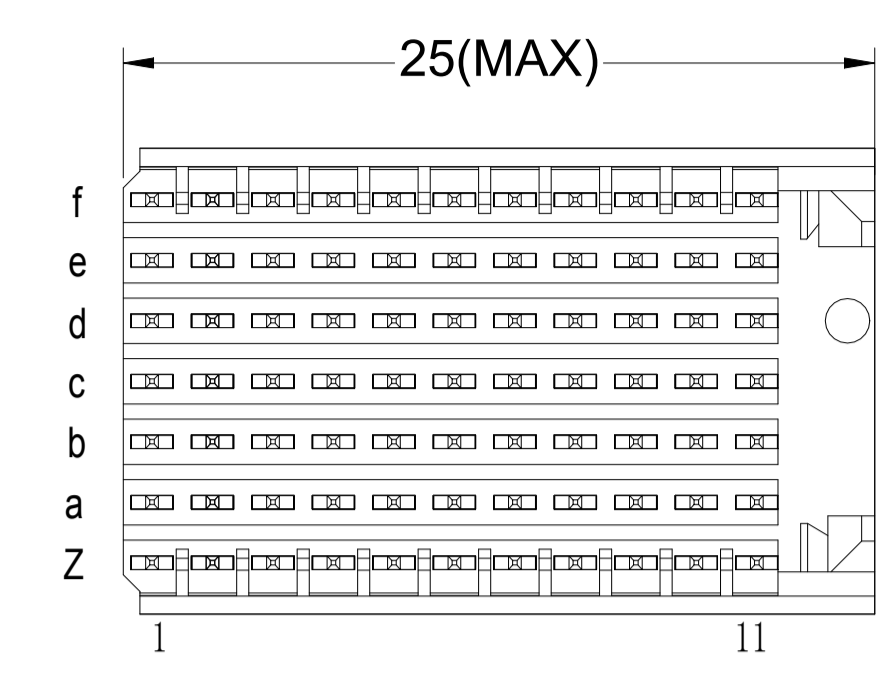

RECOMMEND PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN
TOLERANCE ±0.05

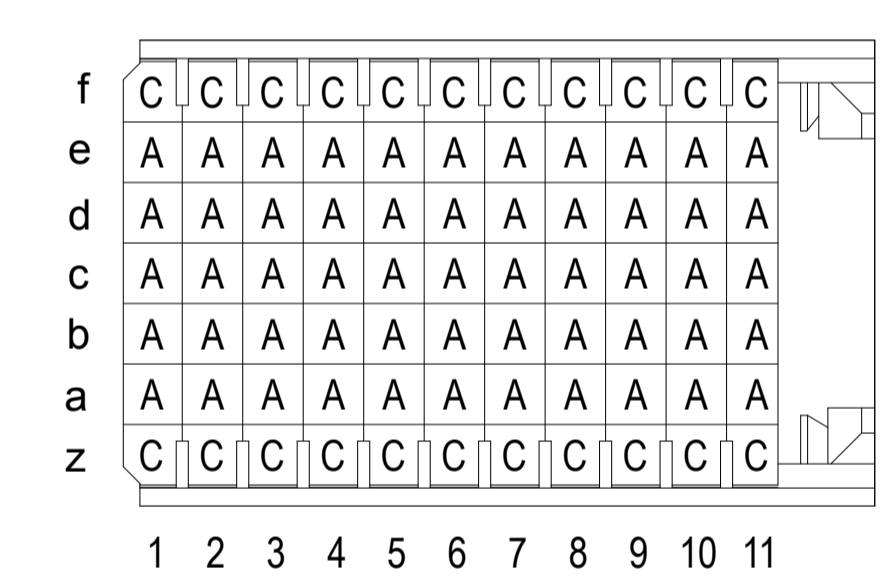

- 1 MATERIAL:
CONTACT: COPPER ALLOY.
HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.

2/3	2392167-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN TONY LI 27MAY2021		CIRK ALEX XU 27MAY2021		NAME HOPE LU 27MAY2021		APPROVED HOPE LU 27MAY2021		PRODUCT SPEC 108-19082		APPLICATION SPEC 114-160149		WEIGHT 0		SIZE A1		CAGE CODE 00779		DRAWING NO. C=2392167		RESTRICTED TO					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		0-PLC ±		1-PLC ±		2-PLC ± ±0.2		3-PLC ±		4-PLC ±		ANGLES ±		MATERIAL 1		FINISH SEE TABLE		CUSTOMER DRAWING		SCALE 4:1		SHEET 1 of 1		REV A	