

ROTACONNECT® ROTATABLE BOARD-TO-BOARD CONNECTOR

OVERVIEW


FCI extends the RotaConnect® Board-to-Board (BTB) range with a pegged version. The locating pegs aid simple placement. This eliminates the hold-down and hence will help customer save the space between connectors on the PCB.

The RotaConnect® BTB range is a unique rotatable Board-to-Board SMT connector that can be used to support perpendicular, coplanar and angled connections, in multiple mating and unmating directions.

The hermaphroditic “mates to itself” design enables mating at any angle between +90° and -60°, enabling the connectors to be placed anywhere on the PCB. This design allows the use of a single part number which will comprise both male and female contacts.

The high temperature grade housing material is reflow solder compatible. Tape and reel packaging permits vacuum pick and place application.

With this extension, FCI’s RotaConnect® BTB range offers 2 and 4 positions with hold-down and locating peg options.

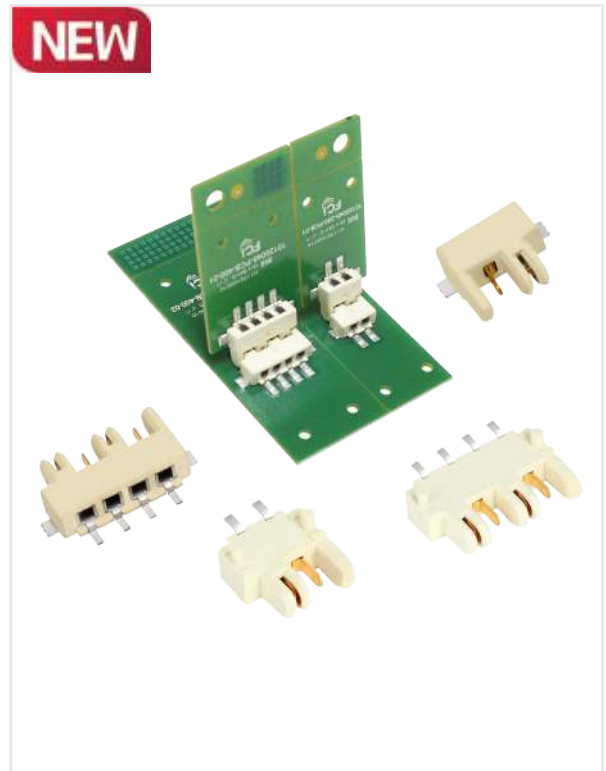

FEATURES

- Hermaphroditic "mates to itself" design
- Mates under any angle +90° and -60°
- Header contact contains a coined hole, the center of the hole is the intended rotation point
- Reliable dual beam contact
- Receptacle contact will guide itself into the center of the hole
- Pins are protected by housing
- Hold-down option
- Locating peg option

BENEFITS

- Eliminates the need for both a header and receptacle for Board-to-Board applications
- Angled connection is not an issue, as connectors can be placed anywhere on the PCB
- Connection Reliability
- Self-guided features prevent mis-mating and assure correct counterpart positioning
- Prevents pin damage during connector mating
- Better retention onto the PCB
- Simplify positioning even in manual assembly condition

▶ ROTACONNECT® ROTATABLE BOARD-TO-BOARD CONNECTOR



TECHNICAL INFORMATION

MATERIALS

- Housing: High-Temperature thermoplastic UL94V-0
- Contact: Copper Alloy
- Plating: GXT™

ELECTRICAL PERFORMANCE

- Current Rating: up to 5A
- Operating Voltage: 125V

ENVIRONMENTAL

- Operating Temperature: -40°C to +125°C

MECHANICAL PERFORMANCE

- Durability : ≤ 20 mating cycles
- Mating Angle: between +90° and -60°

SPECIFICATIONS

- Test specifications EIA 364 and IEC test methods

APPROVALS AND CERTIFICATIONS

- UL E66906

PACKAGING

- Tape and Reel

TARGET MARKET/APPLICATIONS

- Industrial
 - Control boards
 - Sensors, Actuators
 - Rigid LED strips
 - Automotive lighting
 - Channel lettering
 - Lighting luminaries

PART NUMBERS

Description	No. of Contacts	Termination	Contact Type	Part Number
2 Position Hermaphroditic Rotatable Board-To-Board Connector	2	SMT	1 Male, 1 Female	10120045-200LF
2 Position Hermaphroditic Rotatable Board-To-Board Connector with Locating Pegs	2	SMT	1 Male, 1 Female	10120045-201LF
4 Position Hermaphroditic Rotatable Board-To-Board Connector	4	SMT	2 Male, 2 Female	10120045-400LF
4 Position Hermaphroditic Rotatable Board-To-Board Connector with Locating Pegs	4	SMT	2 Male, 2 Female	10120045-401LF

BWBRBTBPEG0515EA4

Disclaimer

Please note that the above information is subject to change without notice.