
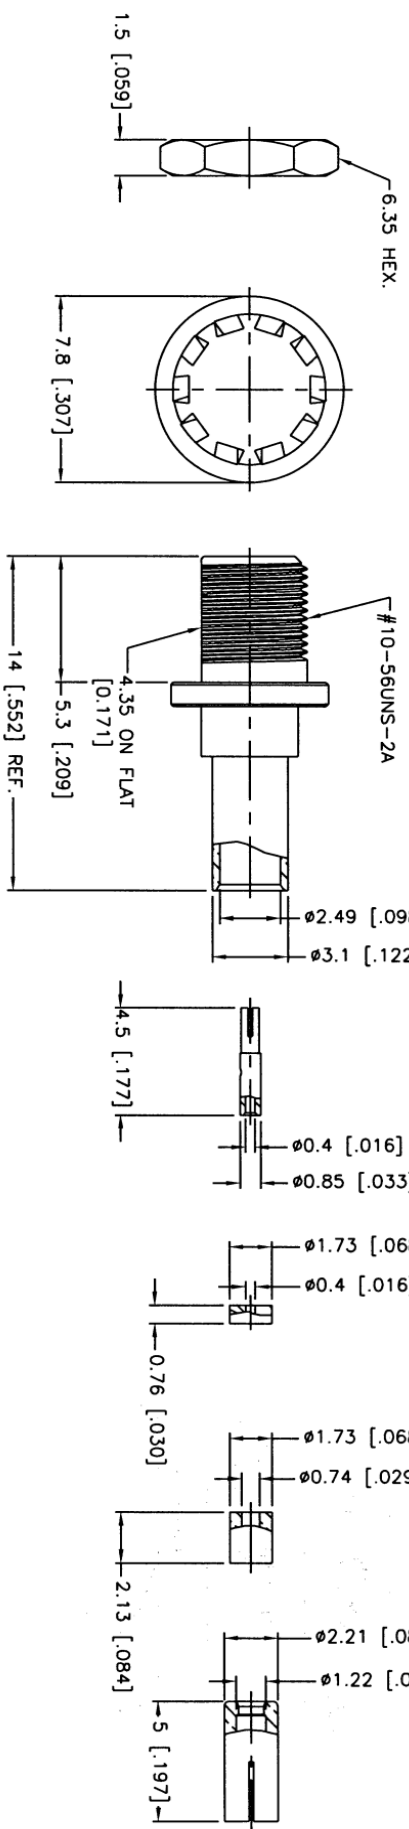


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/27/09	XXXXXX	INITIAL RELEASE

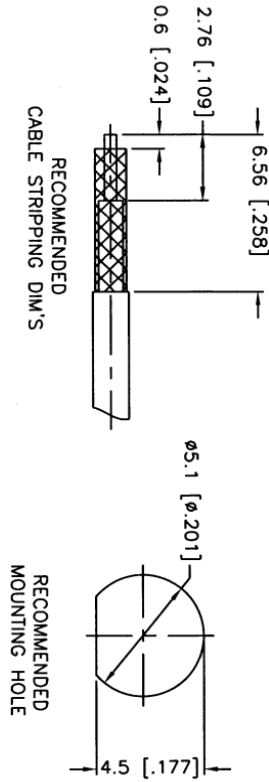

NOTE:  
 1. CRIMPED FERRULE  
 HEX CRIMP SIZE .105"  
 2. SOLDER CENTER CONTACT  
 3. MAX.PANEL THICKNESS=2mm

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	BRASS	INNER FERRULE
1	GOLD	BRASS	SLEEVE
1	NATURAL	PTFE	INSULATOR
1	GOLD	BRASS	HEX NUT
1	GOLD	BRASS	LOCK WASHER
1	GOLD	BRASS	CONTACT PIN
1	GOLD	BRASS	BARREL
1	NATURAL	PTFE	INSULATOR
1	GOLD	BRASS	BODY

APPROVALS	DATE
M. ZHANG	07/27/09

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND DECIMALS ARE IN MILLIMETERS. DIMENSIONS FOR CUSTOMER REFERENCE ONLY.
TOLERANCES FOR DIMENSIONS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
TOLERANCES FOR ANGLES ARE: .020 - .315 = ± 0.007° .315 - 1.180 = ± 0.015° 1.180 - 4.724 = ± 0.020°

DO NOT SCALE DRAWING
----------------------

APPROVALS	DATE
M. ZHANG	07/27/09

DESCRIPTION	PART NO.
MMCX BULKHEAD CRIMP JACK (FOR 1.13mm CABLE)	262141

DESCRIPTION	MATERIAL	FINISH	QTY
INNER FERRULE	BRASS	GOLD	1
SLEEVE	BRASS	GOLD	1
INSULATOR	PTFE	NATURAL	1
HEX NUT	BRASS	GOLD	1
LOCK WASHER	BRASS	GOLD	1
CONTACT PIN	BRASS	GOLD	1
BARREL	BRASS	GOLD	1
INSULATOR	PTFE	NATURAL	1
BODY	BRASS	GOLD	1