

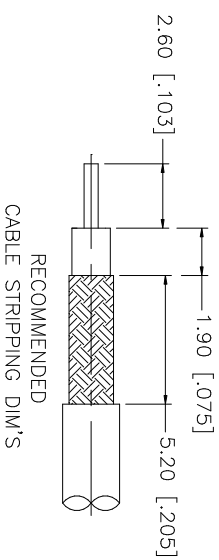



REV.	DATE	DESCRIPTION
NC	03/30/03	INITIAL RELEASE

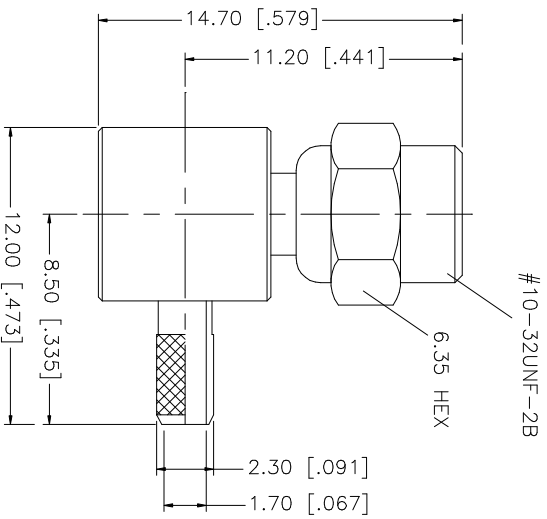

HEAT SHRINK

NOTES:

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	BRASS	HEAT SHRINK TUBE
1	GOLD	BRASS	FERRULE
1	GOLD	BRASS	COVER
1	GOLD	BER. COPPER	CONTACT PIN
1	NATURAL	TEFLON	INSULATOR
1	GOLD	BRASS	SHELL/BODY

APPROVALS	DATE	PART DESCRIPTION
DRAWN G.R.S.	03/30/03	MINI 75 ohm SMC R/A CRIMP PLUG (FOR RG-179/U, 187A/U CABLE)
CHECKED		
ISSUED		
SHEET 1 OF 1		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
	0.5 - 8mm ± 0.20mm	.020 - .315 ± 0.007"
	8 - 30mm ± 0.40mm	.315 - 1.180 ± 0.015"
	30 - 120mm ± 0.50mm	1.180 - 4.724 ± 0.020"
		DO NOT SCALE DRAWING

CAD FILE	DWG. NO.	REV. NC	SIZE	SCALE
C:/152/152107-75.DWG	152107-75.DWG		A	NA

**Amphenol Connex**