


TECHNICAL SPECIFICATIONS

D-Sub Hood:

Material: UL 94 V-0 Plastic Material
 Operating Temperature: -55°C to +110°C
 Cable Entry: Side
 Thumbscrews: UNC 4-40 (Standard)
 Cable O.D: Up to 11,5mm
 Colour: Black

Female Sub-D Connector:

Insulator: PBT, Black, UL94 V-0
 Shell: Steel, Tin Plated
 Contact pins: Copper Alloy
 Stamped & Formed Pins: Class 3, 100 inserts min.
 Machined Contact Pins: Class 1, 500 inserts min.
 Contact Plating: Selective Gold over Nickel
 Operating Temperature: -55°C to +105°C
 Withstanding voltage: 1000V for 1 minute
 Insulator resistance: 1000MΩ min.

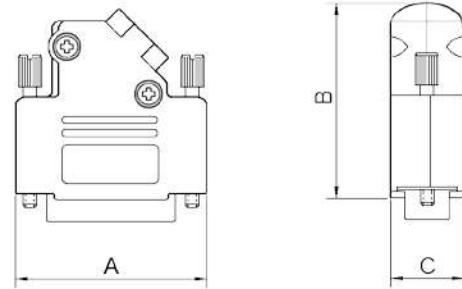

Features:

- Available in sizes 9-15-25-37
- Suitable for any common Sub-D connector
- Strain relief inserts ensure a secure termination
- Re-openable

| Size D45PK-P | Dim A | Dim B | Dim C |
|--------------|-------|-------|-------|
| 9-way | 31,0 | 36,3 | 15,0 |
| 15-way | 39,5 | 40,3 | 15,0 |
| 25-way | 53,2 | 40,3 | 15,0 |
| 37-way | 69,7 | 40,3 | 15,0 |

Ordering information - Black Insulator:

| Size: | P/N - Kitted: | Class 3 - 100 inserts min. |
|--------|---------------|----------------------------|
| 9-way | 6355-0034-11 | D45PK-P-09-DBS-K |
| 15-way | 6355-0034-12 | D45PK-P-15-DBS-K |
| 25-way | 6355-0034-13 | D45PK-P-25-DBS-K |
| 37-way | 6355-0034-14 | D45PK-P-37-DBS-K |

| Size: | P/N - Kitted: | Class 1 - 500 inserts min. |
|--------|---------------|----------------------------|
| 9-way | 6355-0035-11 | D45PK-P-09-DMS-K |
| 15-way | 6355-0035-12 | D45PK-P-15-DMS-K |
| 25-way | 6355-0035-13 | D45PK-P-25-DMS-K |
| 37-way | 6355-0035-14 | D45PK-P-37-DMS-K |

Ordering information - White Insulator:

| Size: | P/N - Kitted: | Class 3 - 100 inserts min. |
|--------|---------------|----------------------------|
| 9-way | 6355-8034-11 | D45PK-P-09-DBS-W-K |
| 15-way | 6355-8034-12 | D45PK-P-15-DBS-W-K |
| 25-way | 6355-8034-13 | D45PK-P-25-DBS-W-K |
| 37-way | 6355-8034-14 | D45PK-P-37-DBS-W-K |

| Size: | P/N - Kitted: | Class 1 - 500 inserts min. |
|--------|---------------|----------------------------|
| 9-way | 6355-8035-11 | D45PK-P-09-DMS-W-K |
| 15-way | 6355-8035-12 | D45PK-P-15-DMS-W-K |
| 25-way | 6355-8035-13 | D45PK-P-25-DMS-W-K |
| 37-way | 6355-8035-14 | D45PK-P-37-DMS-W-K |

