





LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	B	REVISED PER ECR-13-011489	30NOV2013	KH PD

SUGGESTED MATING TAB

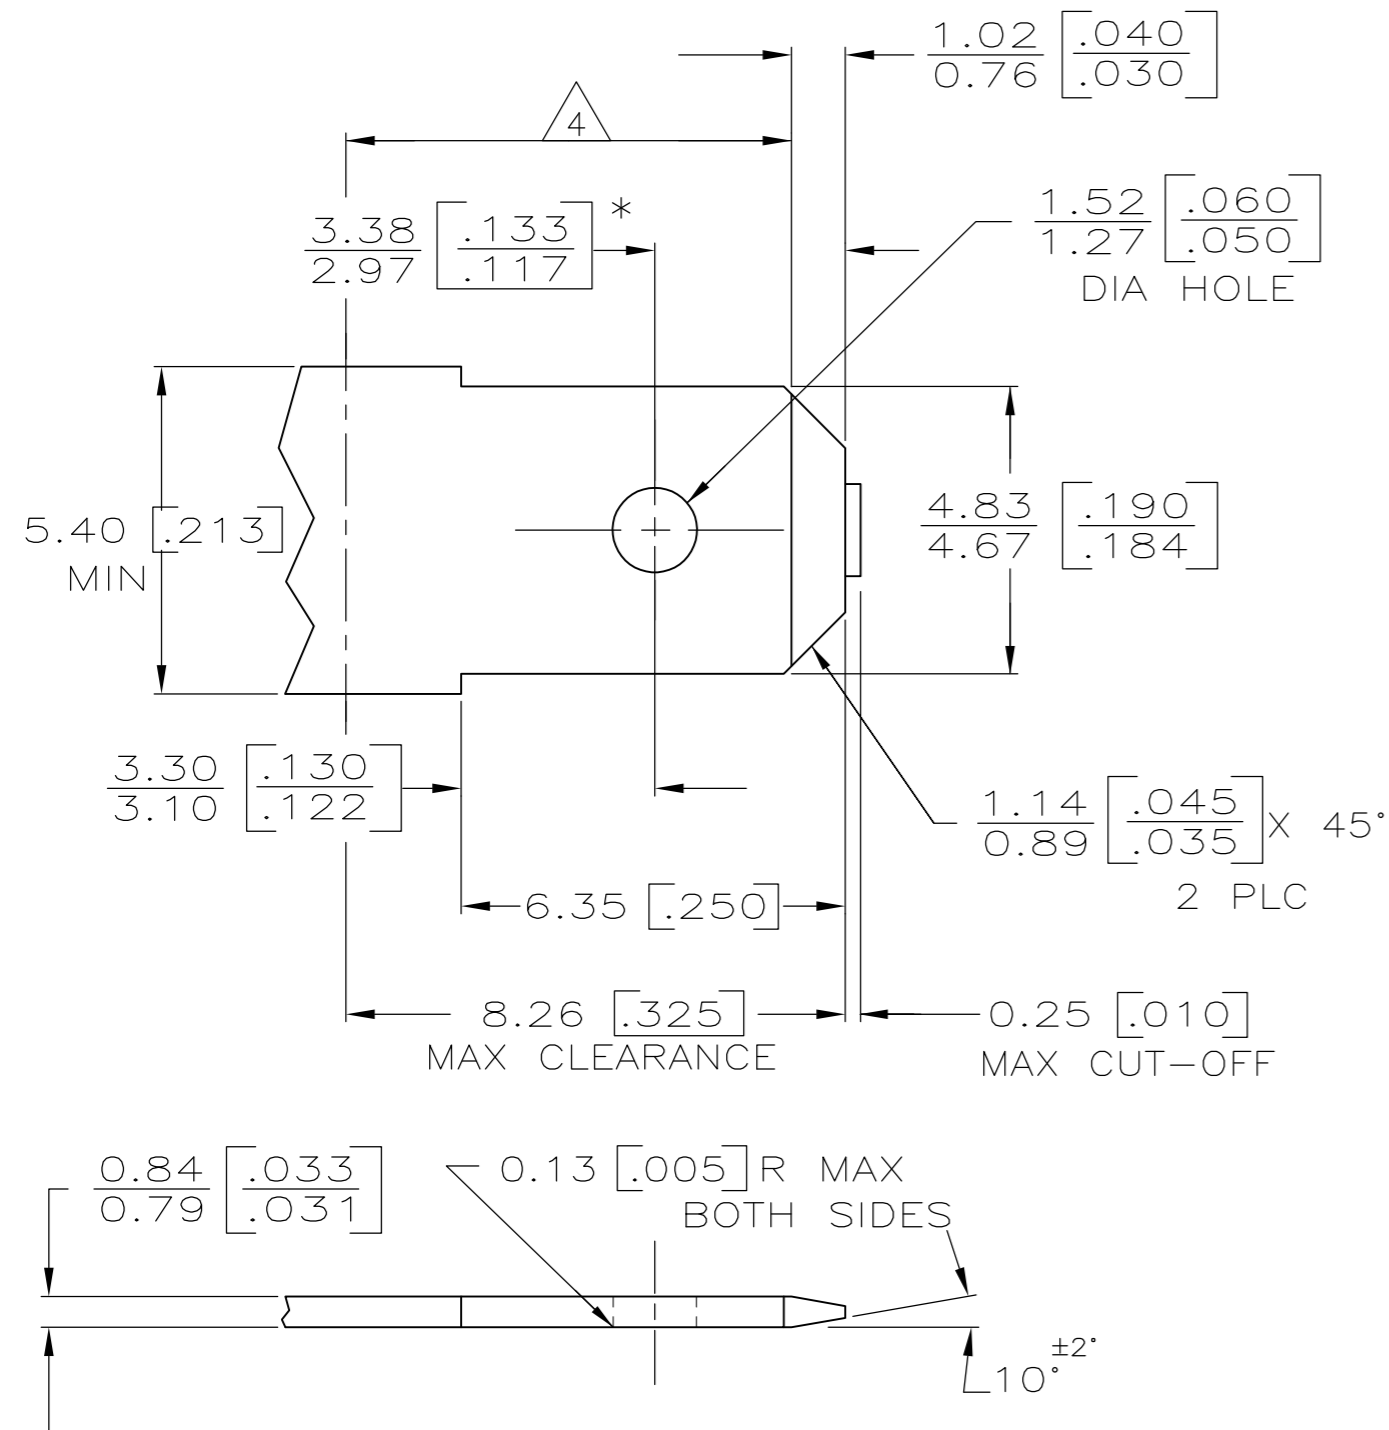


- 1 MATL: #2 HARD BRASS OR NICKEL PLATED STEEL.
- 2 NO BURRS PERMISSIBLE AT HOLE.
- 3 TIN PLATING IS REQUIRED ON BRASS WHEN TEMPERATURE IS OVER 225° F.
- 4 MUST BE FLAT WITHIN 0.076[.003] OVER THIS LENGTH.
- 5 HOLE MUST BE SYMMETRICAL ABOUT TAB ϵ WITHIN 0.076[.003].
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.


- 1 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 2 CONTINUOUS STRIP ON REELS.
- 3 THIS DIMENSIONS MUST BE MAINTAINED FOR PROPER FUNCTION OF THE LATCHING MECHANISM.
- 4 LEVER MAY NOT UNLOCK MATING TAB.

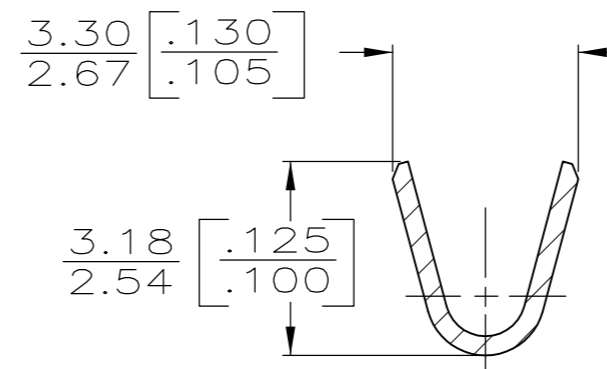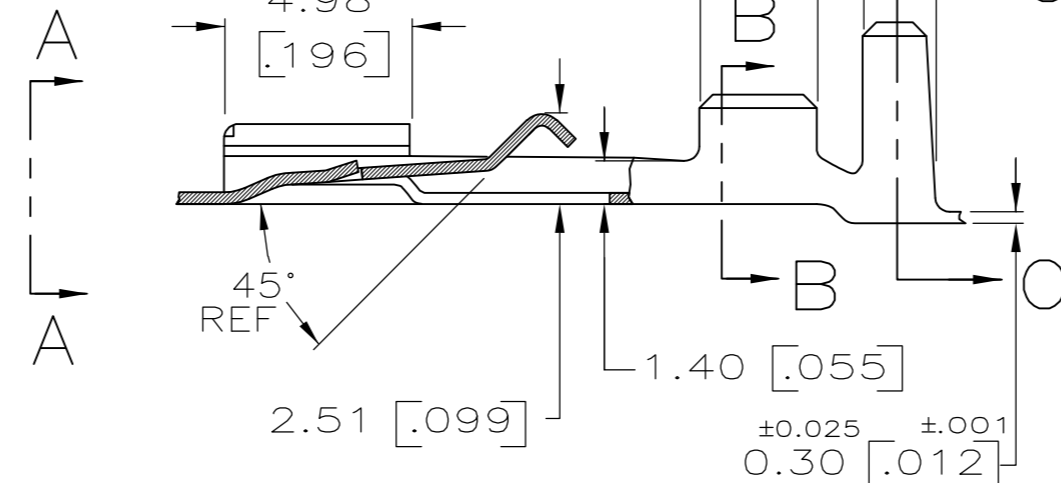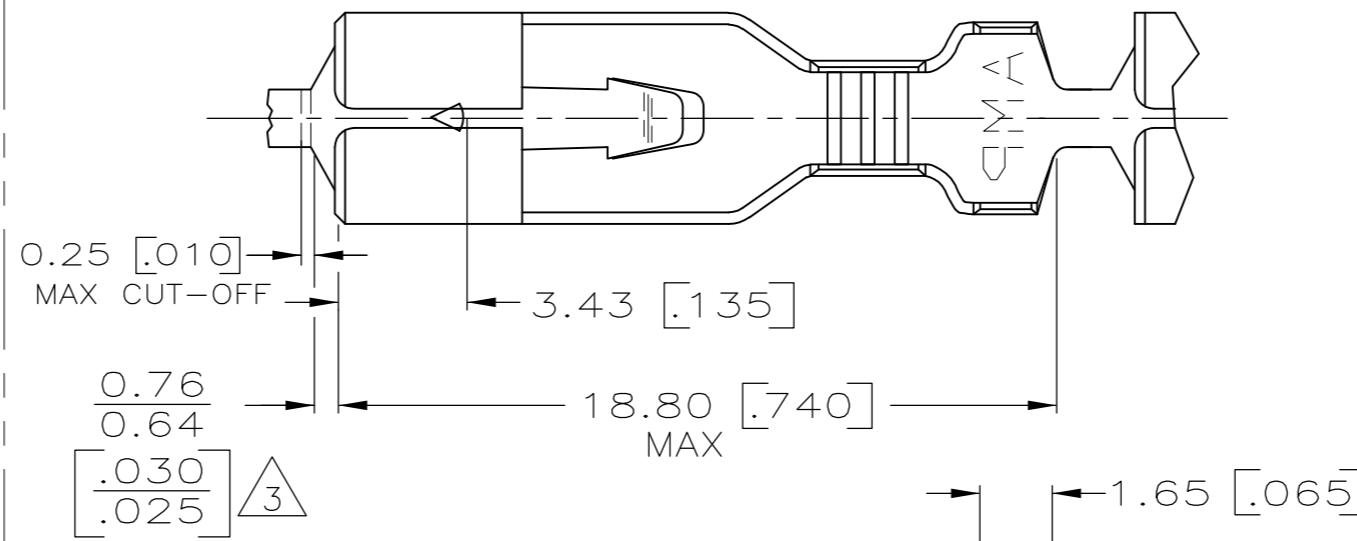

SECTION B-B

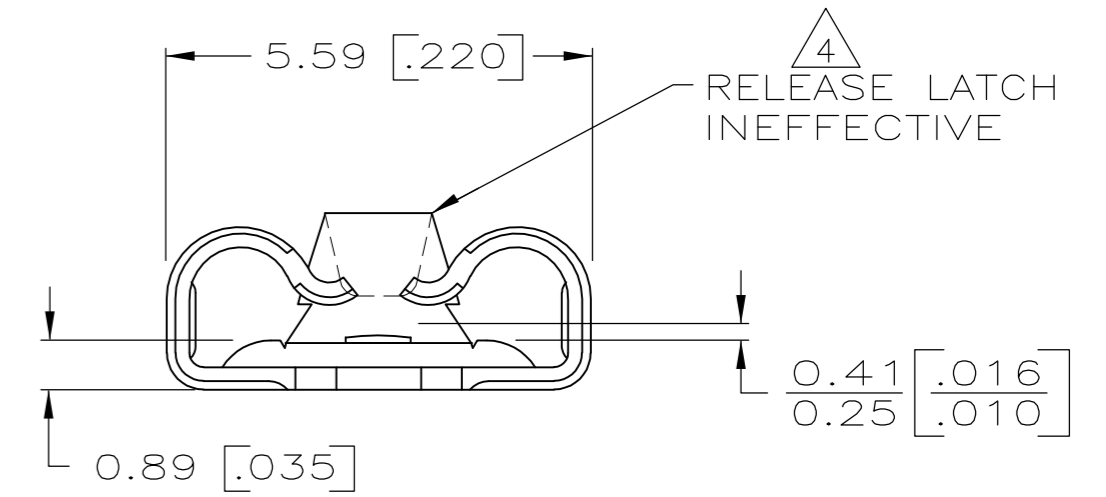

VIEW A-A

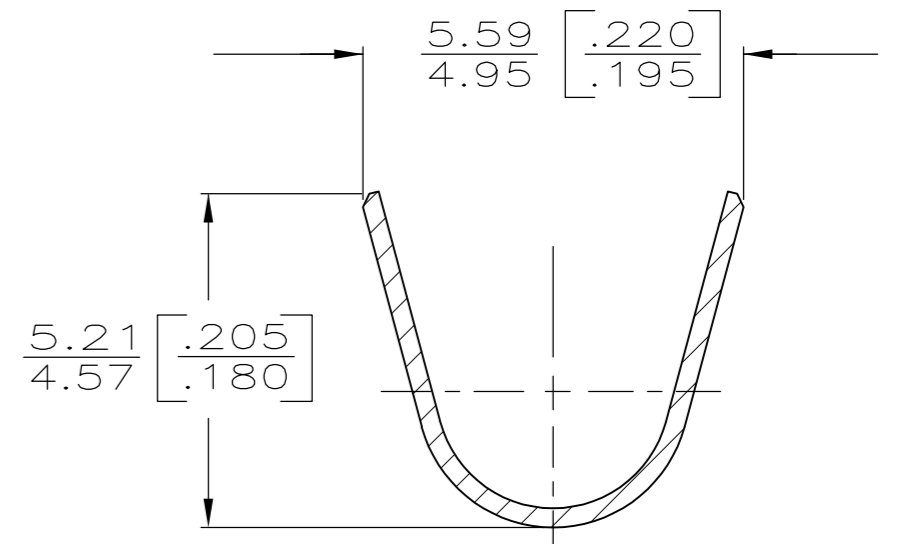

SECTION C-C

2.29 - 3.30 [.090 - .130]	0.5 - 1.4mm ² [20-16]	63520-1
INSULATION RANGE	WIRE SIZE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	3/27/90		TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK	G YETTER	3/27/90		RECEPTACLE, POSITIVE LOCK, .187 SERIES		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J GILLESPIE	3/27/90		SIZE	CAGE CODE	DRAWING NO
0 PLC ± -		PRODUCT SPEC	A2 00779 C=63520			RESTRICTED TO		
1 PLC ± -		APPLICATION SPEC	CUSTOMER DRAWING			SCALE	SHEET	
2 PLC ± -		WEIGHT	-			5:1	1 of 1	
3 PLC ± 0.25 [.010]		FINISH	TIN 0.002032 [.000080 MIN]			REV	B	
4 PLC ± -								
ANGLES ± -								