


-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPXLK-SALRMGT-4IN (4 INCHES)
 CB1.37-IPXLK-SALRMGT-10IN (10 INCHES)

REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		PRODUCTION RELEASE	M. LARSEN	06/07/2022

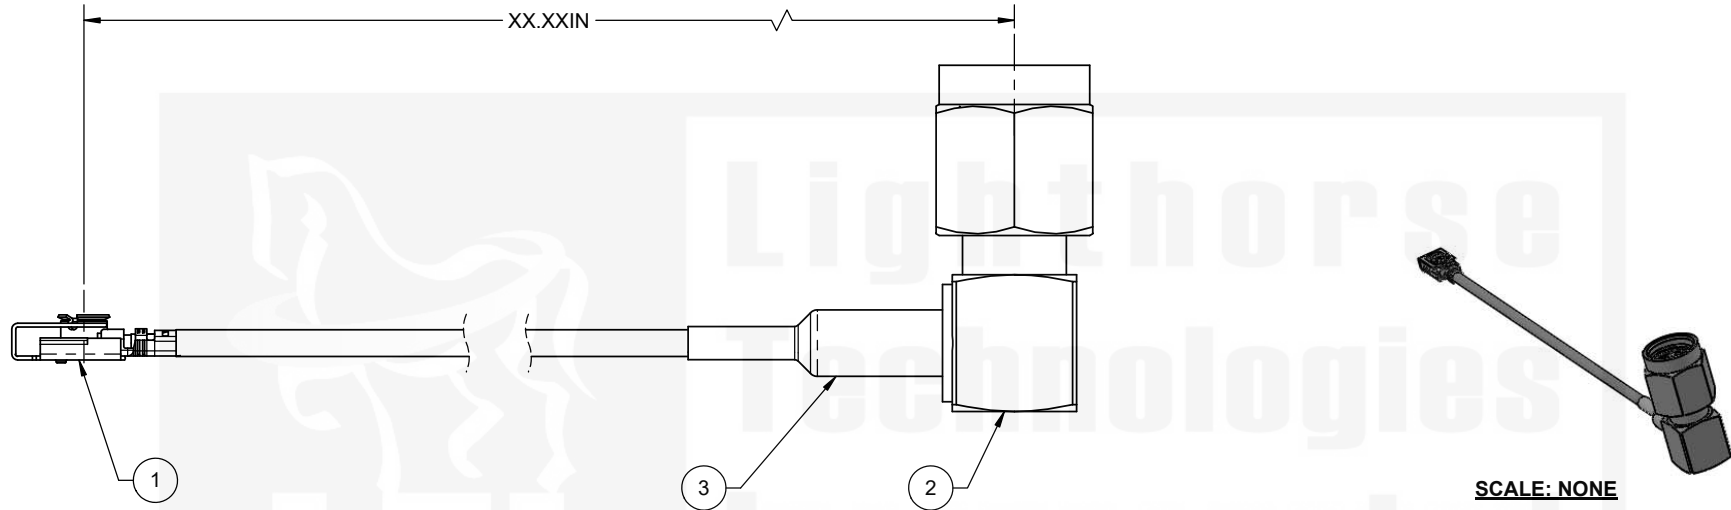

ITEM	PART NUMBER	DESCRIPTION	QTY
1	CB1.37-IPXLK-500MM	IPXLK (MHF1 LK) LOCKING, RHT ANGLE, JACK, USING 1.37 CABLE, BLACK, (I-PEX 20351-112R-37)	0.5
2	SALRM11GT-316	SMA, RIGHT ANGLE, REV POL PLUG, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING			Lighthouse Technologies		
TOLERANCES UNLESS OTHERWISE SPECIFIED			San Diego, CA WWW.IPCONNECTOR.COM		
DIMENSIONS ARE IN MILLIMETERS			TITLE: CABLE ASSEMBLY, IPXLK (MHF1 LK), LOCKING, R/A JACK, CRIMP TO SMA, R/A RP PLUG, CRIMP USING 1.37 MICRO COAX		
X = ±0.5 XX = ±0.25 XXX = ±0.13 ANGLE = ±30°			SIZE	PART/DWG. NO:	REV
CUSTOMER APPROVAL			B	CB1.37-IPXLK-SALRMGT-xxIN	A
SIGN / DATE:		SCALE: 4:1		FILE NAME	
ENG APPR.	P. BURDGE	06/07/2022		SHEET 1 OF 1	
CHECKED	M. HELD	06/07/2022			
DRAWN	M. LARSEN	06/07/2022			
NAME	DATE				

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHORSE TECHNOLOGIES. LIGHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

