
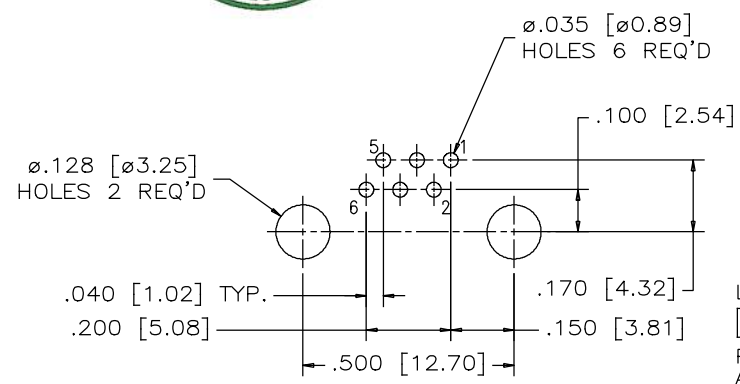
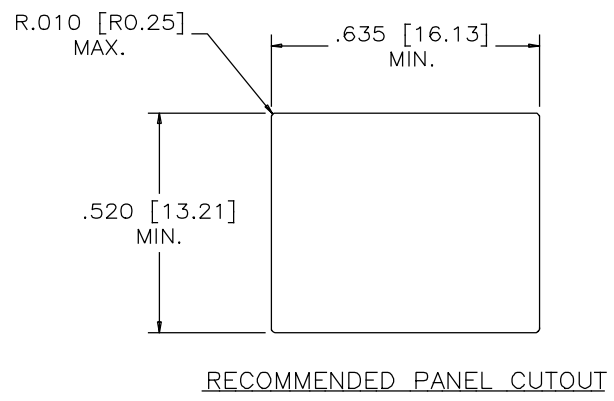
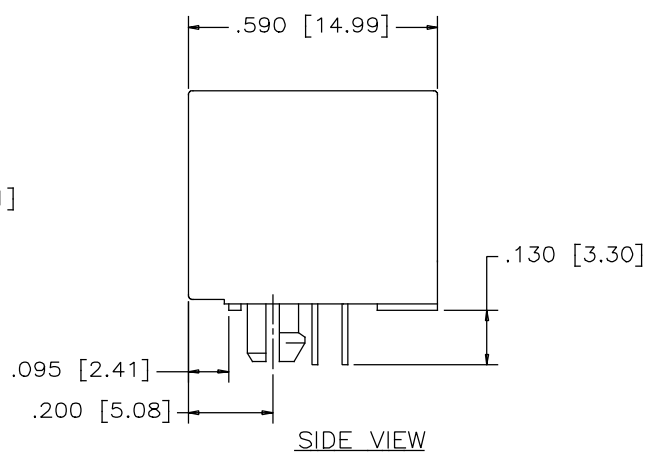


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR08/18	L.CHAN

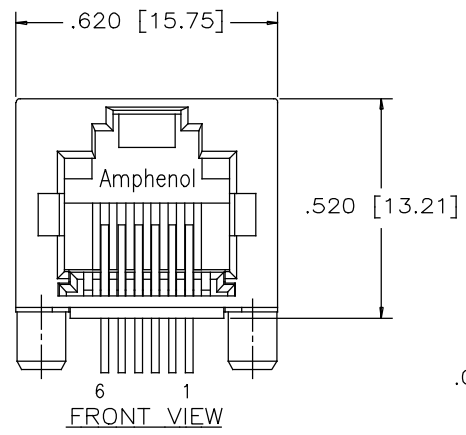

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

CONTACTS:

PHOSPHOR BRONZE
PLATING: 50 μ" [1.27 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE-TIN ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 260° MAXIMUM FOR 5 SEC MAXIMUM.

PART NUMBER: RJHSE-7060-A1

LOCATE HOLES
⊕ ⌀.005 [0.13]
POSITION DIMENSIONS
ARE BASIC

UNLESS SPECIFIED OTHERWISE		DRAWN	W.GIU	DATE	MAR08/18	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS	INCH	CHECKED	L.CHAN	DATE	MAR08/18	
SECONDARY UNITS	MILLIMETER	M.E. APP'D		TITLE		SINGLE PORT HIGH SPEED MODULAR JACK CONNECTOR, 6P6C, WITHOUT SHIELD .130" LONG CONTACT TAILS- RoHS COMPLIANT
REFERENCE IN PARENTHESES		Q.A. APP'D		REF.		
GENERAL TOLERANCES		DWG APPR.		ENG. REL. NO.		DWG. NO.
1 DECIMAL PLACE	±0.025	REF.				P-RJHSE-7060-A1
2 DECIMAL PLACES	±0.020	THIRD ANGLE PROJECTION				REV
3 DECIMAL PLACES	±0.015	DO NOT SCALE DRAWING				A
ANGULAR DEGREES	±1.0°					CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1