

Withwave's Terminations are composed of broadband, due to the coaxial construction, It offers a excellent performance specified from DC to 40 GHz. Precision 2.92 mm coaxial connector interfaces ensure an good impedance match across wide bandwidth.

■ Features

- DC to 40 GHz
- VSWR (Max): 1.30 : 1
- 2.92 mm (Male) type




■ Specification

Scope	Specification	TM03-02-05A
Electrical	Impedance(Ohm)	50
	Freq. range (GHz)	DC to 40 GHz
	VSWR (Max)	1.30 : 1
	Power rating	2 Watts
Material	Center Contact	BeCu with gold plated
	Body & Connector	Brass with gold plated
	Operating Temperature	-55 to +125 degrees

* RoHS Compliant

■ Drawing

Unit : mm[inch]

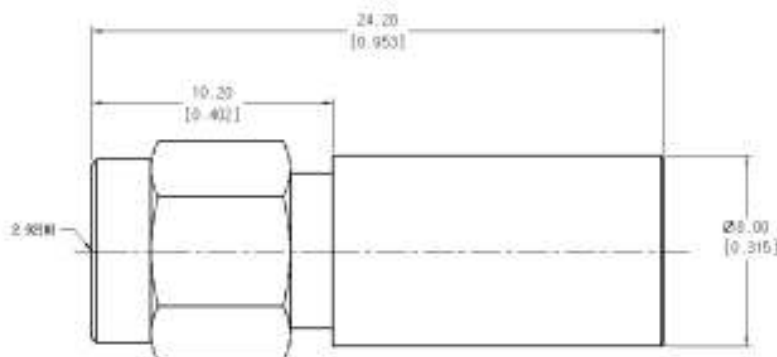

■ Test Result (Return Loss)

Freq: 10 MHz to 40 GHz

