

MATE-N-LOK | Micro MATE-N-LOK

TE Internal #: 1-794616-6 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 16 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 16

Centerline (Pitch): 3 mm [.118 in]

Features

Connectivity

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	16
Number of Rows	2
Electrical Characteristics	
Operating Voltage	250 VDC
Contact Features	
Contact Current Rating (Max)	5 A
Contact Retention Within Housing	Without
Contact Type	Pin

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 16 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



Termination Features

remination reatures	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Mating Alignment Type	Polarization
Mating Retention	With
Mating Alignment	With
Mating Retention Type	Locking Tab
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	3 mm[.118 in]
Housing Color	Black
Housing Material	Nylon 66/6
Dimensions	
Compatible Insulation Diameter (Max)	1.52 mm[.06 in]
Connector Height	6.86 mm
Product Width	16.89 mm
Product Length	24.85 mm
Wire Size	.051 – .517 mm²
Row-to-Row Spacing	3 mm[.118 in]
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
CSA Rating	Certified, LR 7189
UL Rating	Recognized
Agency/Standard	CNR, USR
Approved Standards	UL E28476, VDE 40005280
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 16 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



Packaging Features

Packaging Quantity	500
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series Micro MATE-N-LOK

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 16 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



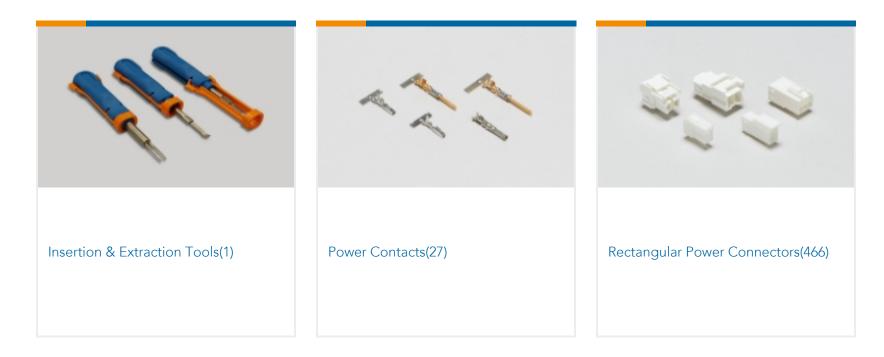

Customers Also Bought



FREE HANG SNGL ROW HSG 4 POS	MINI UMNL PIN SN	PIN CONT 26-30 TIN PLATE L/P	FREE HANG DBL ROW HSG 10 POS
TE TE	€TE		
TE Part #1-2316531-3 AV19 DPM 3A MOVING RING R&G 12V	TE Part #5-1437622-5 KN501BA1/8=KNOB BLK/ALUM 1/8 I		

Documents

Product Drawings FREE HANG DBL ROW HSG 16 POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-794616-6_C1.2d_dxf.zip

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 16 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



English

Customer View Model ENG_CVM_CVM_1-794616-6_C1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-794616-6_C1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

MICRO MATE-N-LOK CONNECTOR SYSTEM

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English